


Series 5062





LIF Straight Direct Solder

Specifications

- Number of Contacts – 5-23
- Vinyl Bag Packaged
- Voltage – 125 V
- Current Rating – 1.0 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-40°C - +85°C)
- Insulator Material – PBT, natural color (UL 94 V-O)
- FFC/FPC Thickness – 0.3 ±0.05 mm (0.012 ±0.002")
- PCB Thickness – 1.6mm (0.633")
- Profile Height – 5.0mm (0.197")

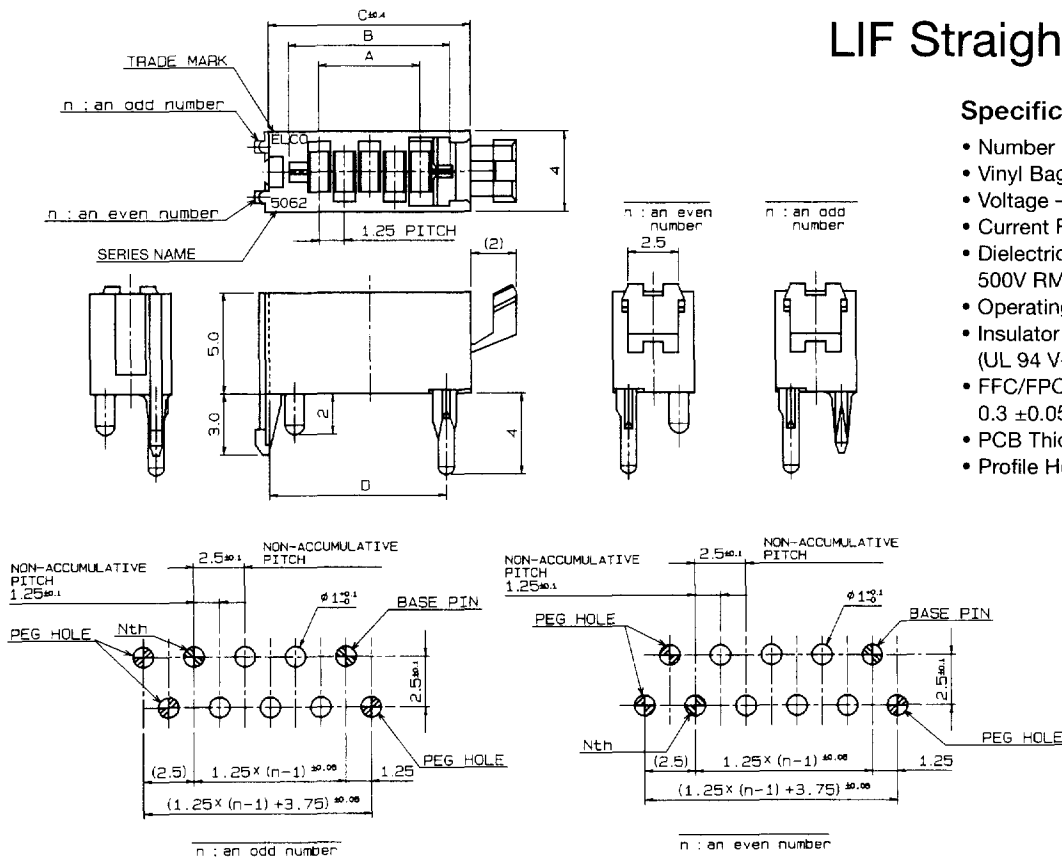

Mating Condition

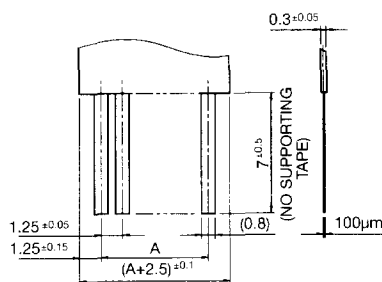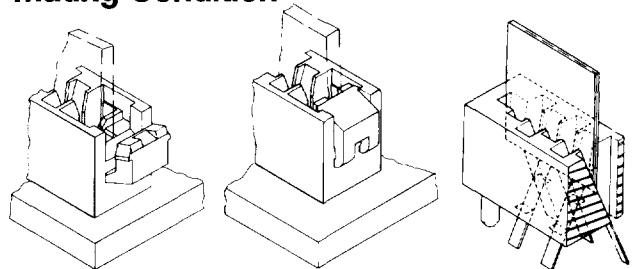

FFC, FPC SPECIFICATION

ORDERING CODE

00 5062 30 10 XX 000

NUMBER OF CONTACTS (05-23)

PART NUMBER	NO. OF CONTACTS	A	B	C	D	QTY. PER PACK
00 5062 30 10 05 000	5	5.00	7.98	10.00	8.75	1000
06	6	6.25	9.23	11.25	10.00	1000
07	7	7.50	10.48	12.50	11.25	1000
08	8	8.75	11.73	13.75	12.50	1000
09	9	10.00	12.98	15.00	13.75	1000
10	10	11.25	14.23	16.25	15.00	1000
11	11	12.50	15.48	17.50	16.25	1000
12	12	13.75	16.73	18.75	17.50	1000
13	13	15.00	17.98	20.00	18.75	1000
14	14	16.25	19.23	21.25	20.00	1000
15	15	17.50	20.48	22.50	21.25	500
16	16	18.75	21.73	23.75	22.50	500
17	17	20.00	22.98	25.00	23.75	500
18	18	21.25	24.23	26.25	25.00	500
19	19	22.50	25.48	27.50	26.25	500
20	20	23.75	26.73	28.75	27.50	500
21	21	25.00	27.98	30.00	28.75	500
22	22	26.25	29.23	31.25	30.00	500
00 5062 30 10 23 000	23	27.50	30.48	32.50	31.25	500

(Dimensions: mm)