

Front-entry

Single-conductor terminal strips, grey,
2 solder pins/pole, standard parts



0.5 – 2.5 mm² "s" | AWG 20 – 12 "sol."

 10 – 12 mm / 0.43 in

2-cond. terminal strips, grey, standard parts
2 solder pins/pole

2x0.25 – 0.75 mm² "s" | 2xAWG 24 – 18 "sol."

 10 – 12 mm / 0.43 in

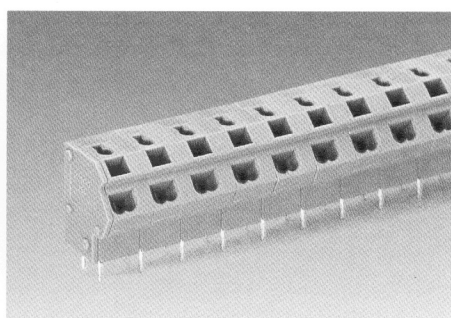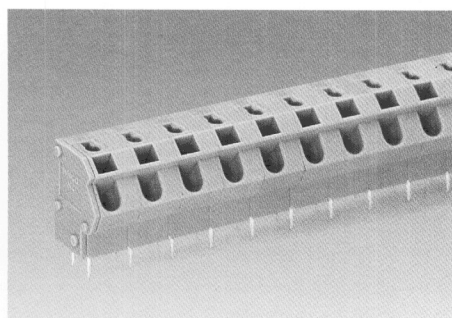

No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Pin spacing 5/5.08 mm / 0.2 in			Pin spacing 5/5.08 mm / 0.2 in		
250 V/4 kV/3, 10 A			250 V/4 kV/3, 10 A		
500 V/4 kV/2, 10 A 300 V, 10 A Ⓢ			500 V/4 kV/2, 10 A 300 V, 10 A Ⓢ		
2	254-452	420	2	254-152	420
3	254-453	280	3	254-153	280
4	254-454	220	4	254-154	220
up to			up to		
10	254-460	80	10	254-160	80
12	254-462	80	12	254-162	80
16	254-466	60	16	254-166	60
24	254-474	40	24	254-174	40
36	254-486	20	36	254-186	20
48	254-498	20	48	254-198	20
Pin spacing 7.5/7.62 mm / 0.3 in			Pin spacing 7.5/7.62 mm / 0.3 in		
400 V/6 kV/3, 10 A			400 V/6 kV/3, 10 A		
800 V/6 kV/2, 10 A 300 V, 10 A Ⓢ			800 V/6 kV/2, 10 A 300 V, 10 A Ⓢ		
2	254-552	280	2	254-252	280
3	254-553	200	3	254-253	200
4	254-554	160	4	254-254	160
up to			up to		
10	254-560	60	10	254-260	60
12	254-562	40	12	254-262	40
16	254-566	40	16	254-266	40
24	254-574	20	24	254-274	20
Pin spacing 10/10.16 mm / 0.4 in			Pin spacing 10/10.16 mm / 0.4 in		
630 V/8 kV/3, 10 A			630 V/8 kV/3, 10 A		
1250 V/8 kV/2, 10 A 300 V, 10 A Ⓢ			1250 V/8 kV/2, 10 A 300 V, 10 A Ⓢ		
2	254-652	220	2	254-352	220
3	254-653	160	3	254-353	160
4	254-654	120	4	254-354	120
up to			up to		
10	254-660	40	10	254-360	40
12	254-662	40	12	254-362	40
16	254-666	20	16	254-366	20
24	254-674	20	24	254-374	20