

- Available to accept 3 pin sizes: 1, 1.5, & 2.
- Uses Hi-Temp PCT poly-ester insulator.
- Insulator available in 10 different colors. (Black is standard)

Pin Size	Ordering Information
1.0	395-XX-101-34-34X000
1.5	395-XX-101-03-38X000
2.0	395-XX-101-07-35X000


Insulator Color Options

- X= 0 - Black \*  
 1 - Brown  
 2 - Red  
 3 - Orange  
 4 - Yellow  
 5 - Green  
 6 - Blue  
 7 - Purple  
 8 - Gray  
 9 - White

**XX= Plating Code  
See Below**



RECOMMENDED MOUNTING HOLES

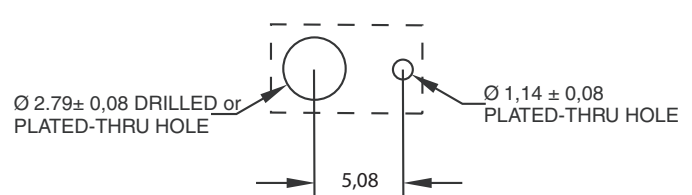

\* Standard

SPECIFY PLATING CODE XX=	13◇		93		43◇	
Sleeve (Pin)	0,25μm Au		5,08μm Sn/Pb		5,08μm Sn	
Contact (Clip)	0,76μm Au		0,76μm Au		0,76μm Au	