
**Electrical Testing** per Tusonix standard test plans and Mil-Std-202 Test Methods.

## MARKETING SALES DRAWING **DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - [ ]**

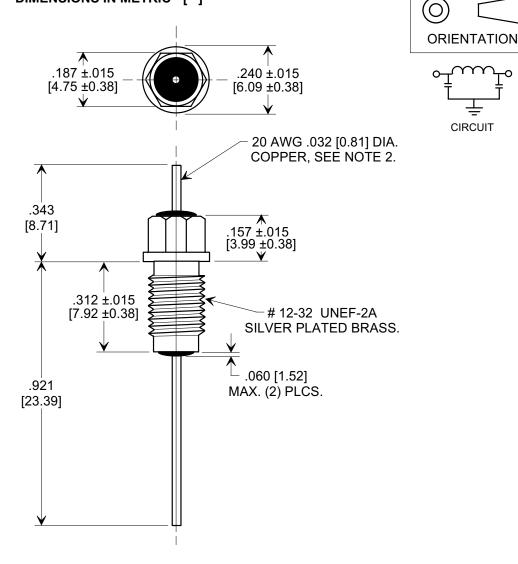

**CIRCUIT** 

## NOTES:

- 1. TUSONIX STANDARD PART NUMBER: 4203-050. TUSONIX RoHS COMPLIANT PART NUMBER: 4203-050 LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- 2. LEAD FINISH: SILVER PLATED.
- 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 4. SUPPLIED WITH SILVER PLATED COPPER ALLOY HEX NUT AND INTERNAL TOOTH LOCK WASHER.

		MIN. CAP. (pF)			VC	) DL1	KING FAGE /dc)			CURRENT IDC	I.R. MIN @ 100 VDC	DWV VDC	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220				
	5000		8	85°C		125 °C		)	10 A	10 GΩ	400	10 MHz	100 MHz	1 GHz	10 GHz		
		3000			200			100		10 %	10 052	400	20	65	70	70	7 I
RECORD	0	"A" ADDED.	2	P FMT & ADDED .060. DIM .240	DED DWV,	-02		AND REVISED NOTES. -15-05	027-3-02 3			TOLE unless othe 2 PLC. DECIMAL 3 PLC. DECIMAL	004 [0 70]	BUSHING STYLE EMI FILTER			
Z	ase	UNIT 85										ANGLES ± ///		Drawn S.M. 04-04-02		Scale X 3	
15 Rev-0 REVISION	Release	. ₽§		COMP.	≺. ∞	٠						TUSONIX		Approved T.C. 04-04-02			
X-2015 Rev-0 REVISIO	Original C.O.	CURREN L.E. 08-20		RDN TO METRIC	WAS .250 COLUMN		20024	ADDED S.M. 11	20051				N, ARIZONA	Α	42	03-050	)