

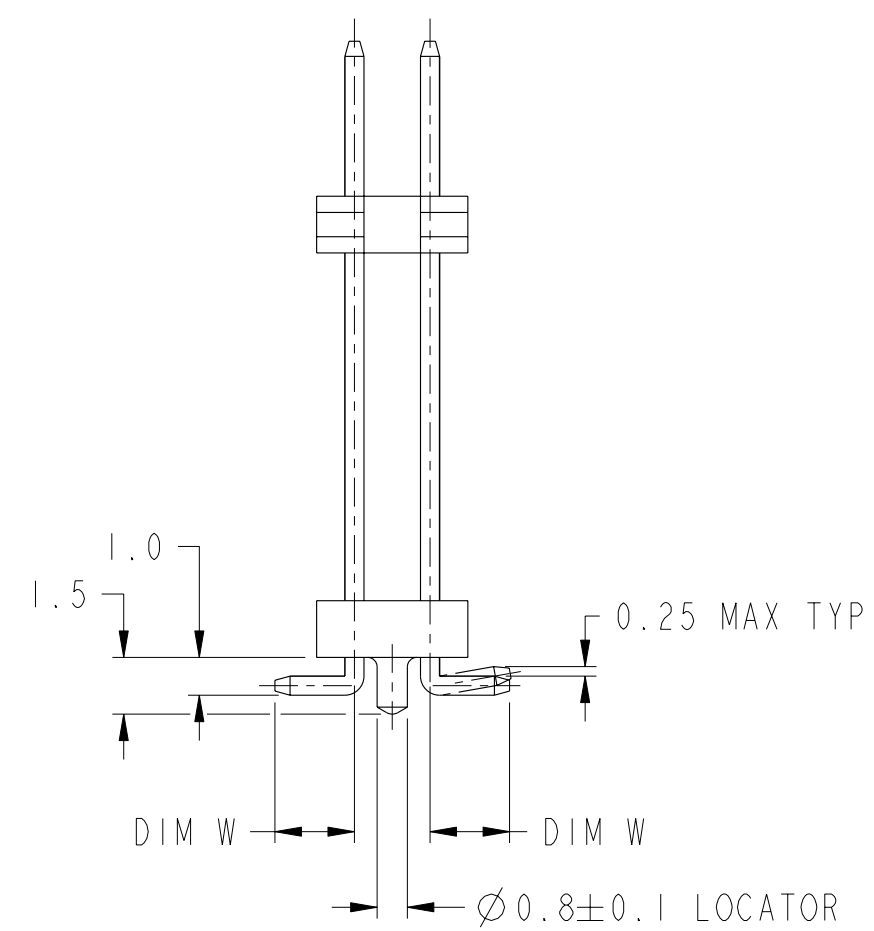


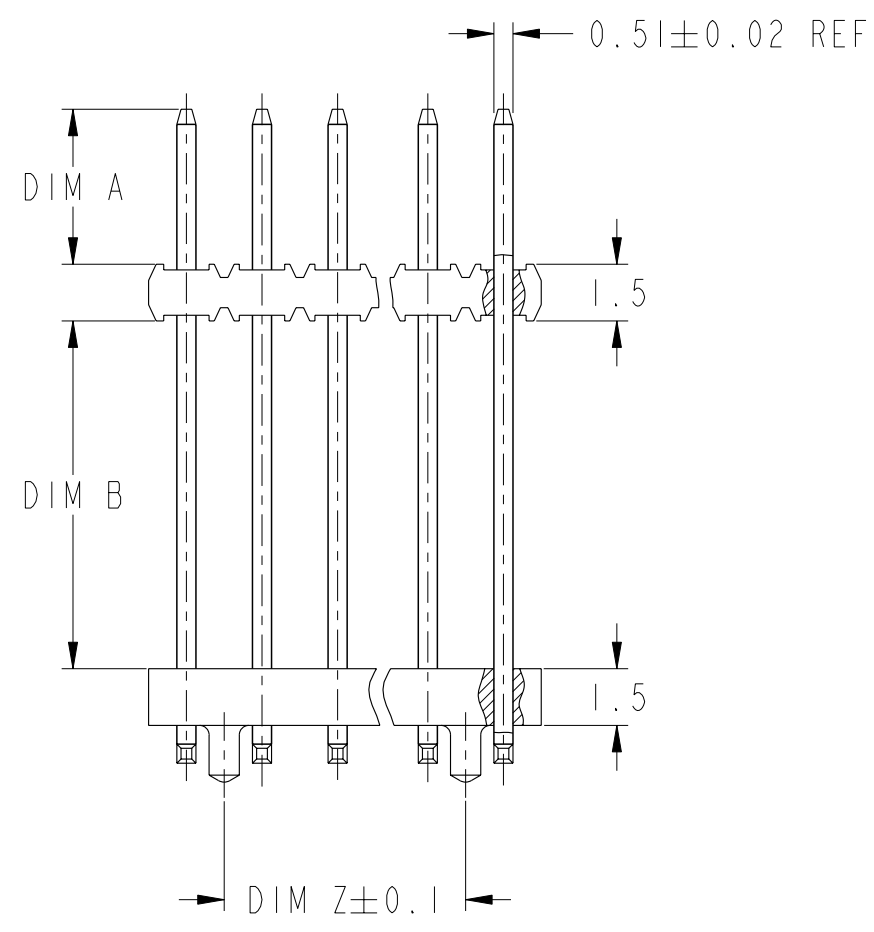


Copyright FCI.

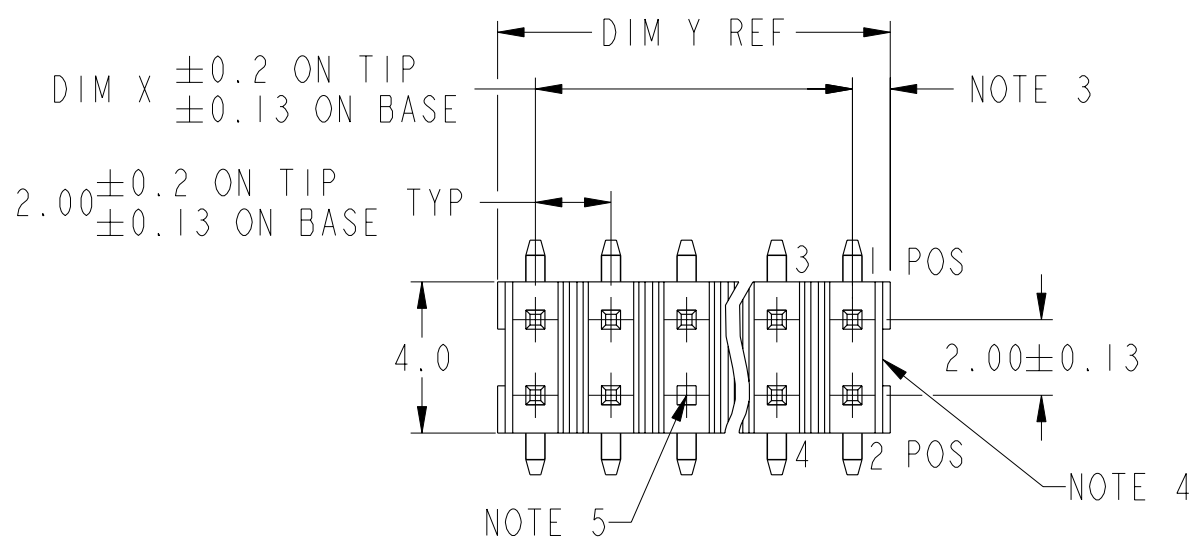


CONFIDENTIAL

rev	ecn no	dr	date
F	S04-0272	KBM	2004/12/21
G	S06-0236	KHL	2006/07/17
H	S10-0205	PR	2010/01/02
-	-	-	-
-	-	-	-
D	S00120	JPEH	1999/11/01
E	S00129	JPEH	2000/07/07

www.fciconnect.com			surface -  ISO 1302		tolerance std ISO 406 ISO 1101		projection 		MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	JPEH	2006/07/17	ANGULAR	LINEAR	0.X	±-	size A3	Scale 5:1		
Eng	JPEH	2000/07/07			0.XX	±0.25				
Chr	KH LEE	2010/01/02	0°	±°	0.XXX	±-	ECN		S10-0205	
Appr	JOEY NG	2010/01/02	Product family				MINITEK	Spec ref -		
			title MINITEK II R/R SMT STR HDR WITH LOCATOR				dwg no 63444		Rev. H	
			catalog no -				CUSTOMER		sheet 1 of 3	

PRODUCT NO.	POS	DIM X	DIM Y	DIM Z	DIM A	DIM B	DIM W	POL. POS	PLATING	TUBE PACK'G AVAILABLE	TUBE W CAP PACK'G AVAIL.
63444-001	2X25	48	50	46	4.1	9.2	2.1	-	0.76µm MIN GXT	YES	YES
-002	2X25	48	50	46	4.0	14.0	2.6	-	0.76µm MIN GXT	-	-
-003	2X8	14	16	12	4.0	14.0	2.6	-	0.76µm MIN GXT	-	-
-004	2X16	30	32	28	4.1	9.2	2.1	-	0.76µm MIN GXT	YES	YES
-005	2X16	30	32	28	3.8	7.2	2.1	-	0.76µm MIN GXT	-	-
-006	2X8	14	16	12	5.0	0	2.1	-	0.76µm MIN GXT	-	-
-007	2X16	30	32	28	5.0	0	2.1	-	0.76µm MIN GXT	-	-

CONFIDENTIAL

www.fciconnect.com			surface ISO 1302		- ✓ tolerance std ISO 406 ISO 1101		projection 		MM 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JPEH	2006/07/17	ANGULAR		LINEAR		0.X	±-	size A3	Scale 5:1	
Eng	JPEH	2000/07/07					0.XX	±0.25			
Chr	KH LEE	2010/01/02	0°	±°			0.XXX	±-	ECN	S10-0205	
Appr	JOEY NG	2010/01/02	Product family					MINITEK		Spec ref	-
		title	MINITEK II R/R						dwg no 63444		Rev. H
			SMT STR HDR WITH LOCATOR								
			catalog no						-		CUSTOMER

I. MATERIAL:

1. MATERIAL:
BODY : GLASS FILLED PCT UL 94V-0 NATURAL
(BEIGE)
PIN : PHOSPHOR BRONZE

2. TOLERANCE UNLESS OTHERWISE NOTED ± 0.25

③. DIM 1.0±0.15 FOR MOLDED SIDE(S) ONLY. IF SIDE(S) ARE BROKEN, DIM 1.5 MAX APPLIES.

④ RECESS APPLIES TO MOLDED SIDE(S) ONLY.

5. POLARISATION BY OMISSION OF PIN. POSITION
REFER TO TABLE.

6. STANDARD PACKAGING IN PLASTIC BAG.

7. P/N 63444-XXXXC TO BE PACKED IN TUBE WITH PICK-UP CAP INSTALLED IN THE CENTRE OF THE PRODUCT. SEE FIG 1. REFER TO TABLE FOR AVAILABILITY.

8. P/N 63444-XXXT TO BE PACKED IN TUBE. REFER TO TABLE FOR AVAILABILITY.


9. PRODUCT DESCRIPTION CODE:
XXXXX-XXXLF



LEAD FREE. SEE NOTE 11
EXTENSION NUMBER
BASE NUMBER

10. THE HOUSING WILL WITHSTAND EXPOSURE TO 250°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

⑪ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

△ 12. A △ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

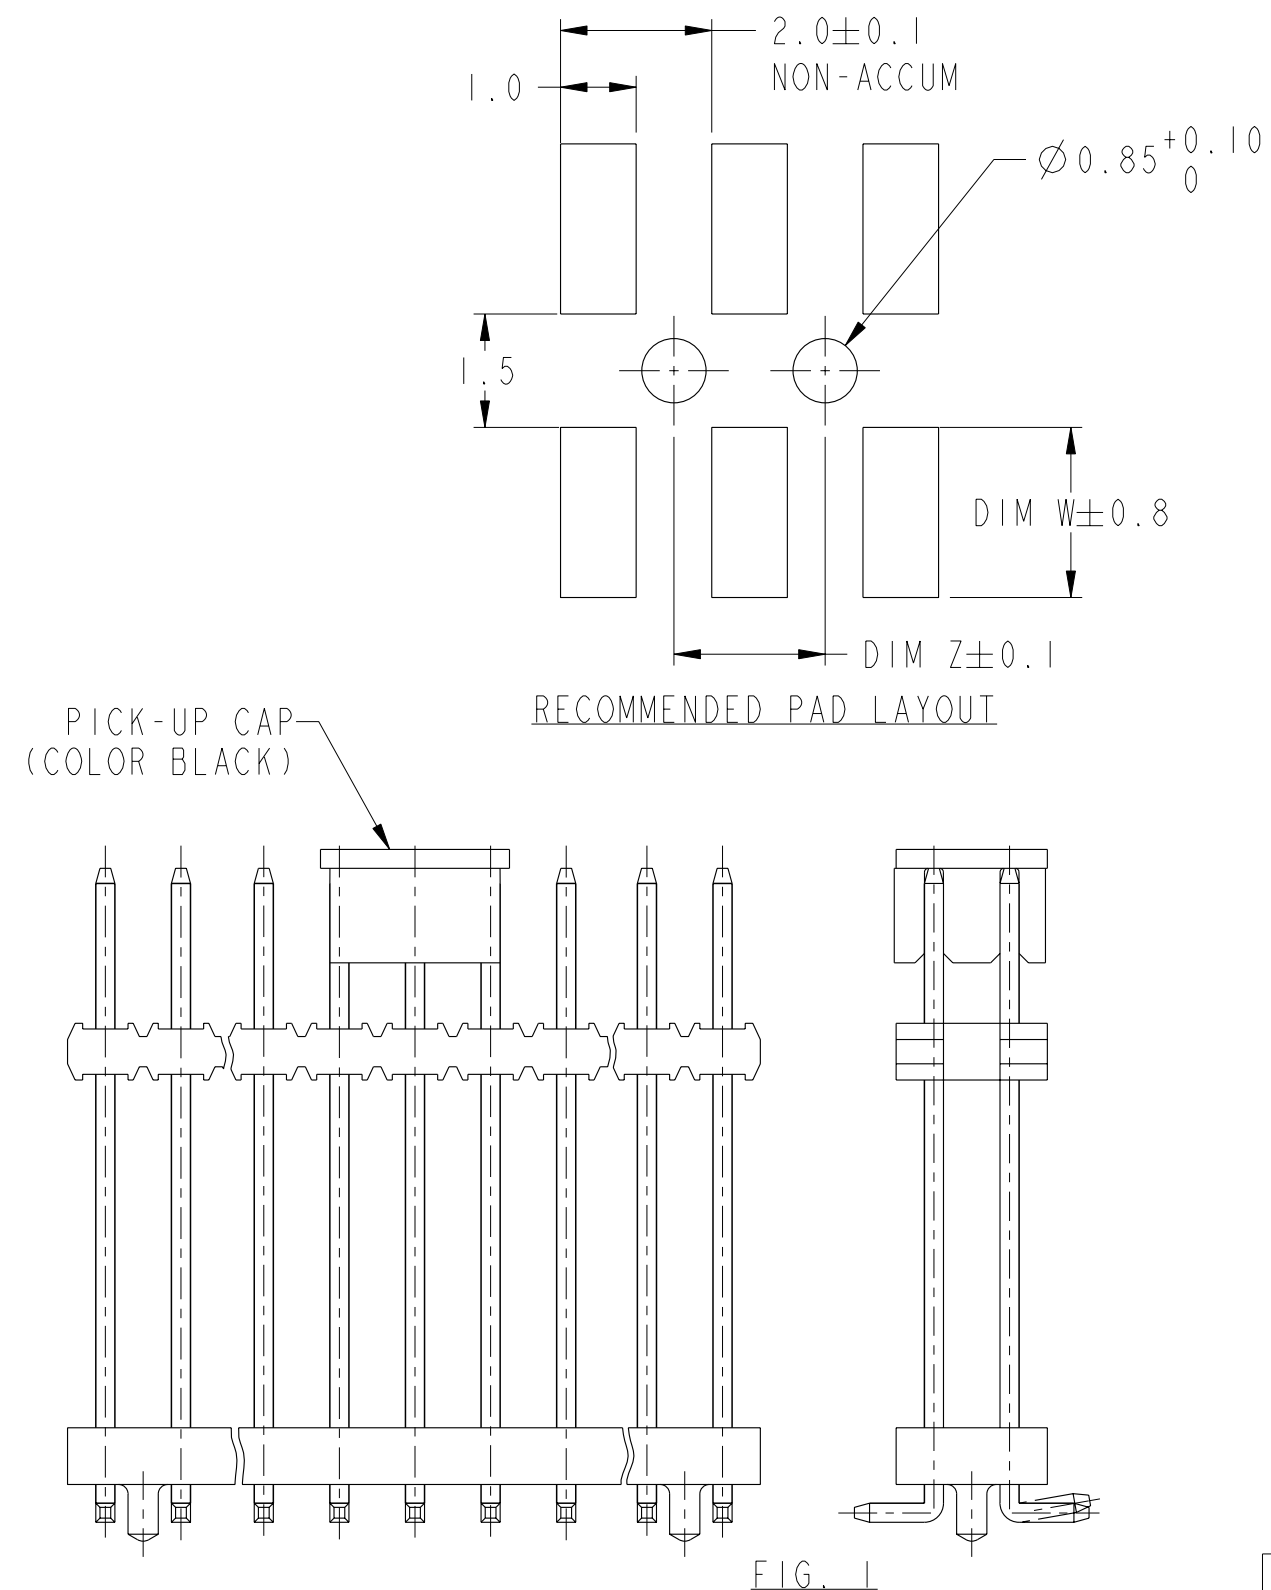

www.fciconnect.com			surface -  ISO 1302		tolerance std ISO 406 ISO 1101		projection 		MM 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	JPEH	2006/07/17	ANGULAR		LINEAR	0.X	±-	size A3	Scale 5:1		
Eng	JPEH	2000/07/07				0.XX	±0.25				
Chr	KH LEE	2010/01/02	0°	±-°		0.XXX	±-	ECN		S10-0205	
Appr	JOEY NG	2010/01/02	Product family				MINITEK		Spec ref		
		title MINITEK II R/R SMT STR HDR WITH LOCATOR					dwg no 63444				Rev H