








FEATURES

- ▶ Fully encapsulated Plastic Case
- ▶ Single-, Dual- and Triple Output Models
- ▶ 3 Mounting Versions:
 - PCB Mounting with Solder Pins
 - Chassis Mounting with Screw Terminals
 - DIN-Rail Mounting
- ▶ Universal Input 85-264 VAC, 47- 440 Hz
- ▶ Protection Class II
- ▶ Safety Approval to cUL/UL/IEC/EN 60950-1
- ▶ UL508 Approval (Option)
- ▶ Over Load and Over Voltage Protection
- ▶ 3 Year Product Warranty


PRODUCT OVERVIEW

The MINMAX AQF-30 series is a new range of fully encapsulated AC/DC power supply modules. The product features EMI-filter to EN55022, class B and EMS compliance to EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets. For industrial applications, the models for chassis mounting can also be supplied as option with UL508 approval. The AQF-30 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number PCB Mounting (For model with Chassis Mounting, add suffix C)	Output Voltage VDC	Output Current		Input Current 115VAC, 60Hz		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %	
		Max.	Peak	@Max. Load	@No Load			
		mA	mA	mA(typ.)	mA(typ.)			
AQF-30S05		5	6000	---	557	60	8000	78
AQF-30S12		12	2500	---	543	60	3900	80
AQF-30S15		15	2000	---	543	60	3900	80
AQF-30S24		24	1250	---	543	60	1500	80
AQF-30S48		48	625	---	543	60	1000	80
AQF-30D12		±12	±1300	---	565	60	#1500	80
AQF-30D15		±15	±1000	---	543	60	#1500	80
AQF-30D512	*5	3000	4500	572	60	3900	76	
	*12	1250	1800			1500		
AQF-30T512	*5	3000	4500	572	60	2200	76	
	12	600	900			1500		
AQF-30T512A	-12	-600	900	572	60	1500	76	
	*5	3000	4500			2200		
	12	1000	1500			1500		
AQF-30T515	-12	-250	500	572	60	1500	76	
	*5	3000	4500			2200		
	15	500	750			1500		
AQF-30T5312P	-15	-500	750	588	60	1500	71	
	*5	4500	6000			2200		
	+3.3	1000	1500			2200		
AQF-30T3512P	+12	250	500	483	60	1500	71	
	*3.3	4000	5300			2200		
	+5	1500	2000			2200		
		+12	250			1500		

* Output floating (note 6)

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
Input Voltage Range		120	---	370	VDC
Inrush Current (Cold Start at 25°C)	115VAC	---	---	20	A
	230VAC	---	---	40	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit			
Output Voltage Accuracy	Single / Dual Output	---	±1.0	±2.0	%			
	Dual Positive / Triple Output	Vo1	---	±1.0	±2.0	%		
		Vo2&Vo3	---	±3.0	---	%		
Line Regulation	Vin=Min. to Max.	---	±0.2	±1.0	%			
Load Regulation	Iout=Min. to Max.	Single Output Models		---	±0.5	±1.0	%	
		Dual Output Models		---	±2.5	±5.0	%	
		Triple Output Models	Vo1	---	±2.5	±5.0	%	
			Vo2&Vo3	---	±4.0	---	%	
Cross Regulation- Dual / Triple Output Models	Vo1	Measured output Io = 20% to 100% of rated load			---	±2.0	---	%
	Vo2	Other output(s) set at 50% of rated load			---	±5.0	---	%
	Vo3				---	±5.0	---	%
Ripple & Noise (20MHz)	3.3V & 5VDC Output Models		---	1.5	1.8	%V _{PP} of Vo		
	Other Output Models		---	1.0	1.3	%V _{PP} of Vo		
Minimum Load	Single-,Dual-Output Models and Main Output Triple Output Models	---	10	---	%Inom.			
	Auxiliary Outputs of Triple Output Models	---	20	---	%Inom.			
Over Voltage Protection	Zener diode clamp	---	120	---	% of Vo			
Temperature Coefficient		---	±0.02	---	%/°C			
Overshoot		---	---	5	% Vout			
Current Limitation	Foldback, auto-recovery (long term overload condition may cause damage)	105	---	---	% Inom.			
Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)							


General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time		---	20	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	200,000	---	---	Hours
EMC Emission	Conducted and radiated	EN 55011 class B, EN 55022 class B, FCC part 15 class B			
EMC Immunity according EN61000-6-1	Standard	Specification Requirement			Performance Criteria
	EN61000-4-2	Air ±8KV Cont. ±4KV			B
	EN61000-4-3	80~1000MHz, 10V/m 80% AM, 1KHz modulation			A
	EN61000-4-4	AC port ±2KV DC, SL, TL ±2KV not less than 1 min.			B
	EN61000-4-5	1.2/50uS(8/20uS) AC dif. ±1KV DC ±0.5KV			B
	EN61000-4-6	0.15~80MHz, 10Vrms (functional earth ports included) 80% AM, 1KHz modulation			B
	EN61000-4-8	50Hz/60Hz, 30A/m			A
	EN61000-4-11	30%, 10ms 60%, 100ms, 95%, 5000ms			B C
Protection Class II		According IEC/EN 60536			
Safety Approvals		cUL/UL 60950-1, IEC/EN 60950-1 (UL508 for models with order code suffix ICE only)			

Input Fuse

All Models	
Built-in Fuse	3.5A / 250VAC
External Fuse (Recommended)	1.5A Slow – Blow Type

Package Specifications Chassis Mounting (order code suffix C)

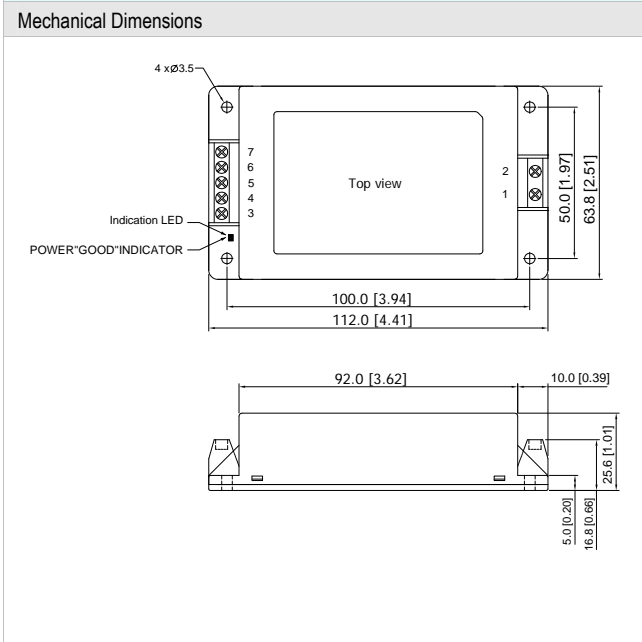

Connections

Terminal	Single	Dual (D12,D15)	Dual (D512)	Triple	Triple (T5312P,T3512P)
1		AC(N) – AC Neutral			
2		AC(L) – AC Line			
3	+Vout	+Vout	+Vout2	+Vout2	+Vout2
4	NC		+Vout1	+Vout1	+Vout1
5	-Vout	Common	-Vout2	Com. 2/3	Com. 2/3
6		NC	-Vout1	-Vout1	-Vout1
7	NC	-Vout	NC	-Vout3	+Vout3


NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin pitch tolerance: ±0.25 (0.01)

Physical Characteristics

Case Size	: 112.0x63.8x25.6mm (4.41x2.51x1.01 inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: 191g

Package Specifications with DIN Rail Mounting Bracket (order code AC-DIN-02)

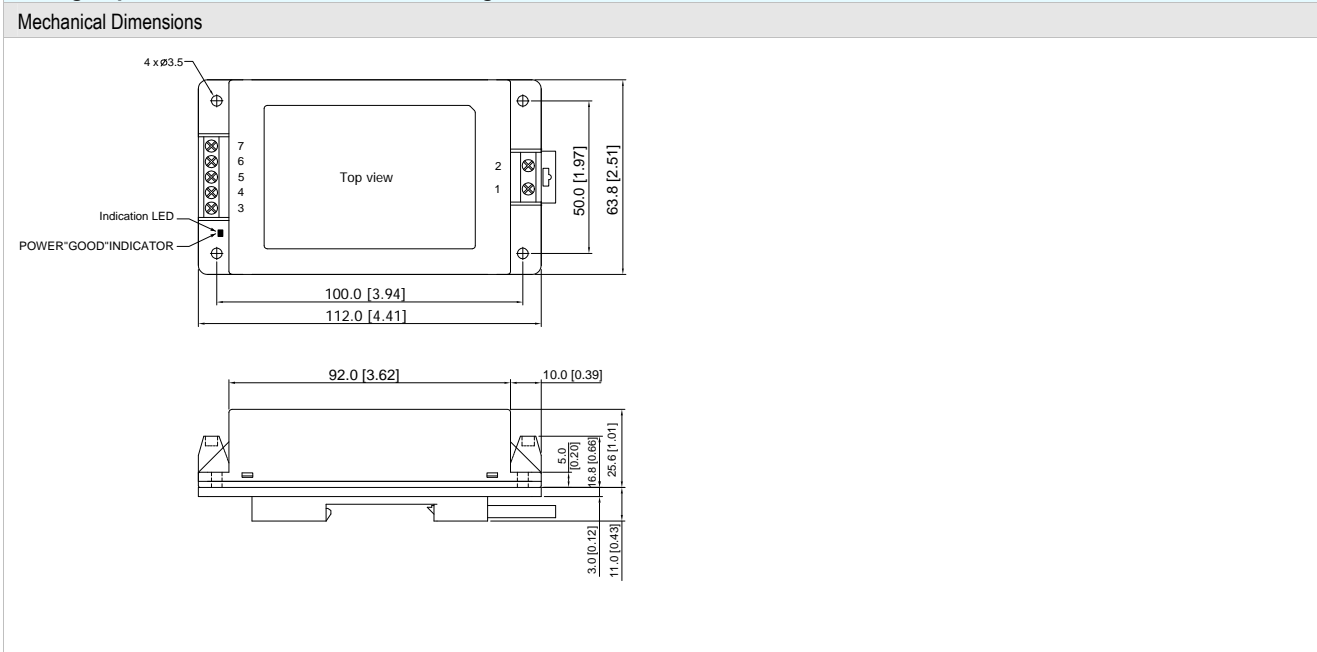

Physical Characteristics

Case Size	: 112.0x63.8x25.6mm (4.41x2.51x1.01 inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: 245g

DIN-Rail Mounting Kit

