

EMI Suppression Chokes

Chokes for data and signal lines, leaded


Current-compensated ring core double and quad chokes
Plastic case (UL 94 V-0), horizontal and vertical versions

Rated voltage 80 Vdc / 42 Vac
Rated current 0,1 A
IEC climatic category 40/125/56


Double chokes

B82791-G15-A14, horizontal
B82791-G15-A16, horizontal

B82791-H15-A25, vertical
B82791-H15-A16, vertical
B82791-H15-A30, vertical

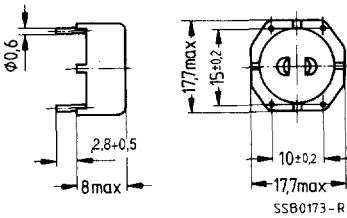

Pin
configuration

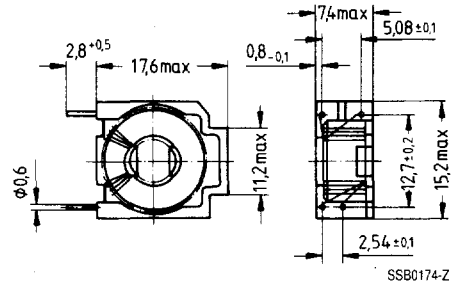


Pin
configuration



Quad chokes

B82791-G14-A16, horizontal

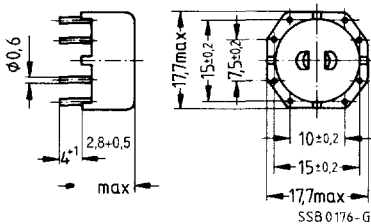

Pin
configuration



EMI Suppression Chokes

I_R per winding	L_R per winding	R_{typ} per winding	Ordering code	Min. qty.	Max. qty.					
A	mH	m Ω								

Double chokes

0,1	47	5200	B82791-H15-A30	50	1000					
0,1	38	3300	B82791-G15-A14	50	1000					
0,1	10	1300	B82791-H15-A25	50	1000					
0,1	4,7	900	B82791-G15-A16	50	1000					
0,1	4,7	900	B82791-H15-A16	50	1000					

Quad chokes

0,1	4,7	900	B82791-G14-A16	50	1000					
-----	-----	-----	----------------	----	------	--	--	--	--	--