

## VOLTAGE DETECTOR


### FEATURES

- Precise Detection Thresholds .... Standard  $\pm 2.0\%$   
Custom  $\pm 1.0\%$
- Small Packages ..... 3-Pin SOT-23A, 3-Pin SOT-89,  
3-Pin TO-92
- Low Current Drain ..... Typ.  $1\mu\text{A}$
- Wide Detection Range ..... 1.1V to 6.0V
- Wide Operating Voltage Range ..... 0.7V to 10V


### APPLICATIONS

- Battery Voltage Monitoring
- Microprocessor Reset
- System Brownout Protection
- Switching Circuit in Battery Backup
- Level Discriminator

### PIN CONFIGURATIONS

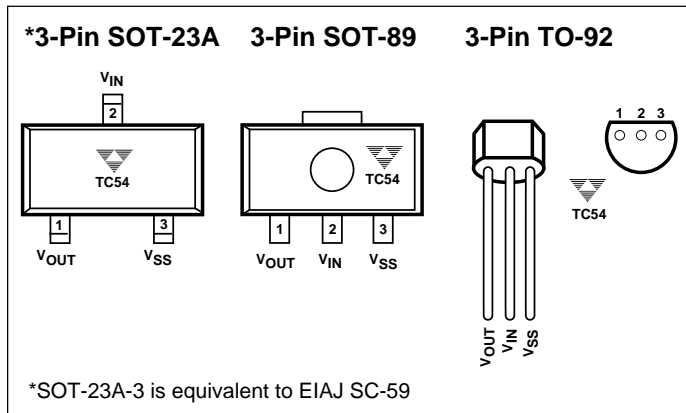

### FUNCTIONAL BLOCK DIAGRAM

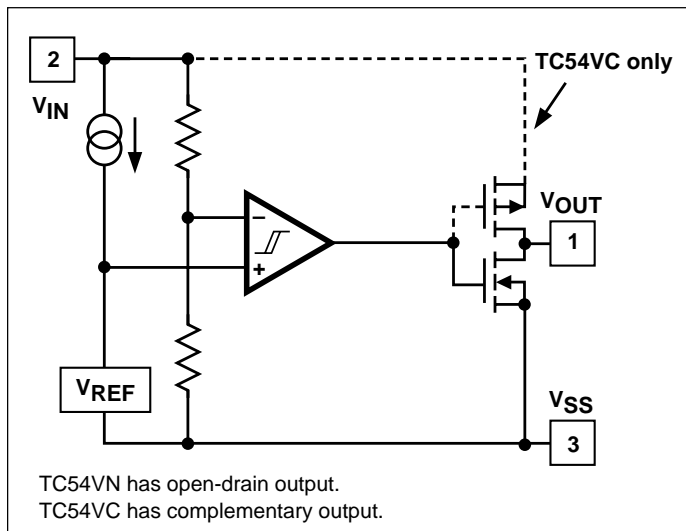

### GENERAL DESCRIPTION

The TC54 Series are CMOS voltage detectors, suited especially for battery-powered applications because of their extremely low  $1\mu\text{A}$  operating current and small surface-mount packaging. Each part is laser trimmed to the desired threshold voltage which can be specified from 1.1V to 6.0V, in 0.1V steps for a 2% and 1.5V to 6.0V for a 1% tolerance.

The device includes a comparator, low-current high-precision reference, laser-trimmed divider, hysteresis circuit and output driver. The TC54 is available with either an open-drain or complementary output stage.

In operation, the TC54's output ( $V_{OUT}$ ) remains in the logic HIGH state as long as  $V_{IN}$  is greater than the specified threshold voltage ( $V_{DET}$ ). When  $V_{IN}$  falls below  $V_{DET}$ , the output is driven to a logic LOW.  $V_{OUT}$  remains LOW until  $V_{IN}$  rises above  $V_{DET}$  by an amount  $V_{HYST}$ , whereupon it resets to a logic HIGH.

### ORDERING INFORMATION

**PART CODE** TC54 V X XX X X X XX XXX

**Output form:** \_\_\_\_\_

- N = Nch Open Drain
- C = CMOS Output

**Detected Voltage:** \_\_\_\_\_

- Ex: 15 = 1.5V; 60 = 6.0V    1.0% Tol.
- Ex: 11 = 1.1V; 60 = 6.0V    2.0% Tol.

**Extra Feature Code:** Fixed: 0 \_\_\_\_\_

**Tolerance:** \_\_\_\_\_

- 1 = 1.0% (custom)
- 2 = 2.0% (standard)

**Temperature:** E:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  \_\_\_\_\_

**Package Type and Pin Count:** \_\_\_\_\_

- CB: 3-Pin SOT-23A\*, MB: 3-Pin SOT-89,
- ZB: 3-Pin TO-92

**Taping Direction:** \_\_\_\_\_

- TR: Standard Taping
- RT: Reverse Taping
- No Suffix: TO-92 Bulk

\* 3-Pin SOT-23A is equivalent to EIAJ SC-59.

## TC54 Series

### ABSOLUTE MAXIMUM RATINGS\*

Supply Voltage $V_{IN}$ .....	12V
Output Voltage: CMOS .....	$(V_{SS} - 0.3)$ to $(V_{IN} + 0.3)$
Open Drain .....	$(V_{SS} - 0.3)$ to 12V
Output Current .....	50mA
Power Dissipation: ( $T_A \leq 70^\circ\text{C}$ )	
3-Pin SOT-23A .....	240mW
3-Pin SOT-89 .....	400mW
3-Pin TO-92 .....	440mW
Operating Temperature .....	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Storage Temperature .....	$-65^\circ\text{C}$ to $+150^\circ\text{C}$
Soldering Temperature (10 sec) .....	$300^\circ\text{C}$

\* Static-sensitive device. Unused devices must be stored in conductive material. Protect devices from static discharge and static fields. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to Absolute Maximum Rating Conditions for extended periods may affect device reliability.


### ELECTRICAL CHARACTERISTICS: $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{IN}$	Operating Voltage	$V_{DET} = 0.8$ to $6.0\text{V}$	0.7		10.0	V
$I_{SS}$	Quiescent Current	$V_{IN} = 2.1\text{V}$ 3.0V 4.0V 5.0V	—	1.0 1.3 1.6 2.0	3.0 3.4 3.8 4.2	$\mu\text{A}$
$V_{DET}$	Threshold Voltage		$(V_{DET})$ $\times 0.98$	—	$(V_{DET})$ $\times 1.02$	V
$V_{HYST}$	Hysteresis Range		$(V_{DET})$ $\times 0.02$	$(V_{DET})$ $\times 0.05$	$(V_{DET})$ $\times 0.08$	V
$I_{OUT}$	Output Current	$V_{OL} = 0.5\text{V}$  TC54VC Only: $V_{OH} = V_{IN} - 2.1\text{V}$	$V_{IN} = 2.1\text{V}$ 3.0V 4.0V 5.0V $V_{IN} = 8.0\text{V}$	— 7.7 10.1 11.5 13.0 — 10.0	—	mA
$T_C (V_{DET})$	Tempco of $(V_{DET})$	$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$	—	$\pm 100$		ppm/ $^\circ\text{C}$

### PIN DESCRIPTION

Pin No.	Symbol	Description
1	$V_{OUT}$	Digital output. This output goes low when $V_{IN}$ drops below $V_{DET}$ and returns high when $V_{IN}$ rises above $V_{DET} + V_{HYST}$ . (See timing chart).
2	$V_{IN}$	Analog input. This pin is both the power supply input and the voltage to be monitored.
3	$V_{SS}$	Ground terminal.

### TIMING CHART

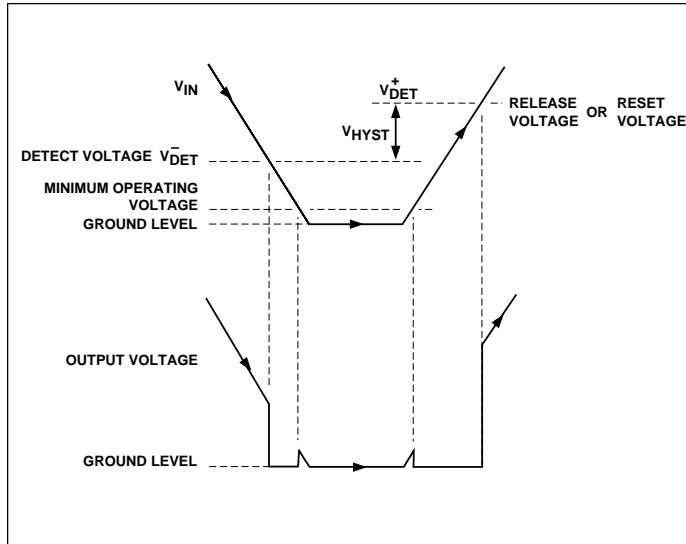

### DESCRIPTION OF OPERATION


Refer to the Timing Chart below. In normal steady-state operation, when  $V_{IN} > V_{DET}^-$ , the output will be at a logic high. In the case of the TC54V, this is an open-drain condition. If and when the input falls below  $V_{DET}^-$ , the output will pull down (Logic 0) to  $V_{SS}$ . Generally,  $V_{OUT}$  can pull down to within 0.5V of  $V_{SS}$  at rated output current and input voltage. (See the Electrical Characteristics section).

The output,  $V_{OUT}$ , will stay valid until the input voltage falls below the Minimum Operating Voltage,  $V_{IN(MIN)}$ , of 0.7V. Below this minimum operating voltage, the output is undefined. During power-up or anytime  $V_{IN}$  has fallen below  $V_{IN(MIN)}$ ,  $V_{OUT}$  will remain undefined until  $V_{IN}$  rises above  $V_{IN(MIN)}$ , at which time the output will become valid.  $V_{OUT}$  will be in its active low state while  $V_{IN(MIN)} < V_{IN} < V_{DET}^+$  ( $V_{DET}^+ = V_{DET}^- + V_{HYST}$ ). If and when the input rises above  $V_{DET}^+$ , the output will assume its inactive state. (High for TC54VC, open-drain for TC54VN).

### APPLICATIONS

Refer to TelCom Semiconductor Application Note #2, *Using the TC54 Voltage Detector*.

### MARKING

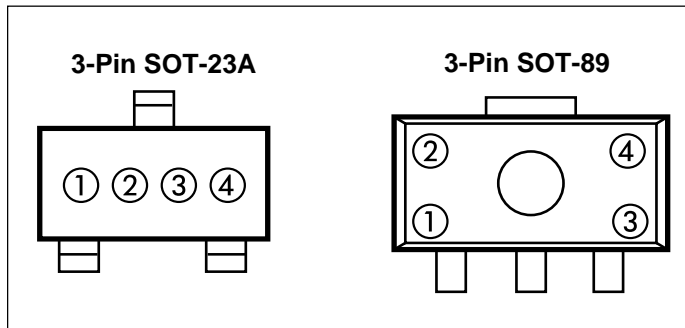

① = output (Nch or CMOS) plus first voltage digit

	1	2	3	4	5	6
Nch	L	M	N	P	R	S
CMOS	B	C	D	E	F	H


ex: CMOS 3.x = ○①○○○

② = first voltage decimal (0-9)

ex: CMOS 3.4 = ○①②○○

③ & ④ = assembly lot number

### 3-Pin TO-92



①, ② & ③ = 54x (fixed)

④ = output (C = CMOS, N = Nch)

⑤ = first voltage digit (2-6)

⑥ = first voltage decimal (0-9)

⑦ = extra feature code : fixed : 0

⑧ = detecting accuracy


1 =  $\pm 1.0\%$  (custom), 2 =  $\pm 2.0\%$  (standard)

⑨, ⑩, ⑪ & ⑫ = assembly lot number

## TC54 Series

### TAPING FORMS


#### Component Taping Orientation for 3-Pin SOT-23A(EIAJ SC-59) Devices

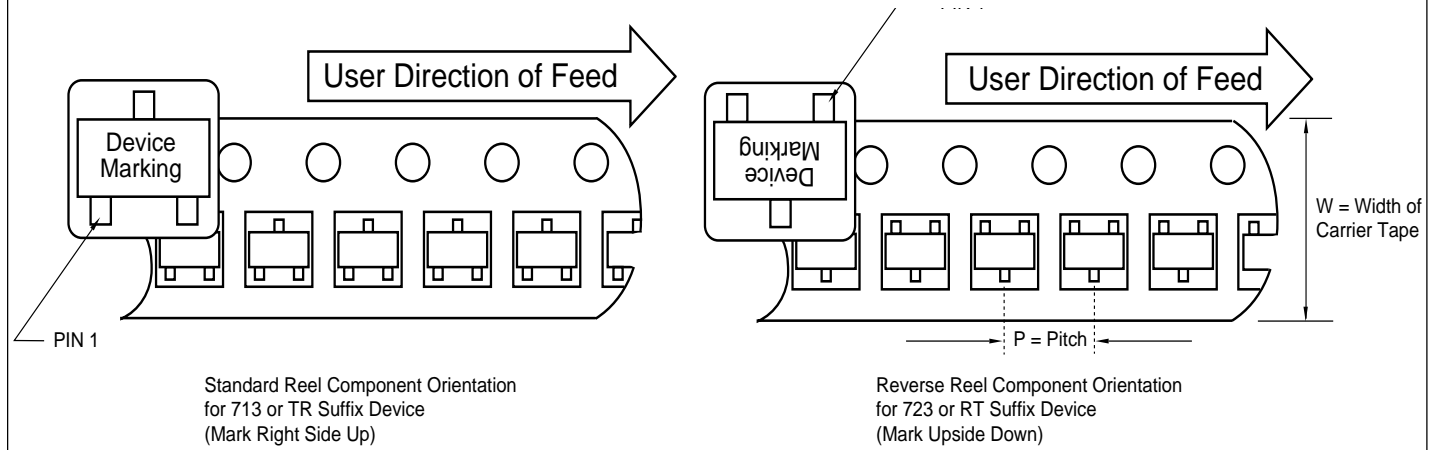

**Carrier Tape, Reel Size, and Number of Components Per Reel**

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
3-Pin SOT-23A	8 mm	4 mm	3000	7 in


#### Component Taping Orientation for 3-Pin SOT-89

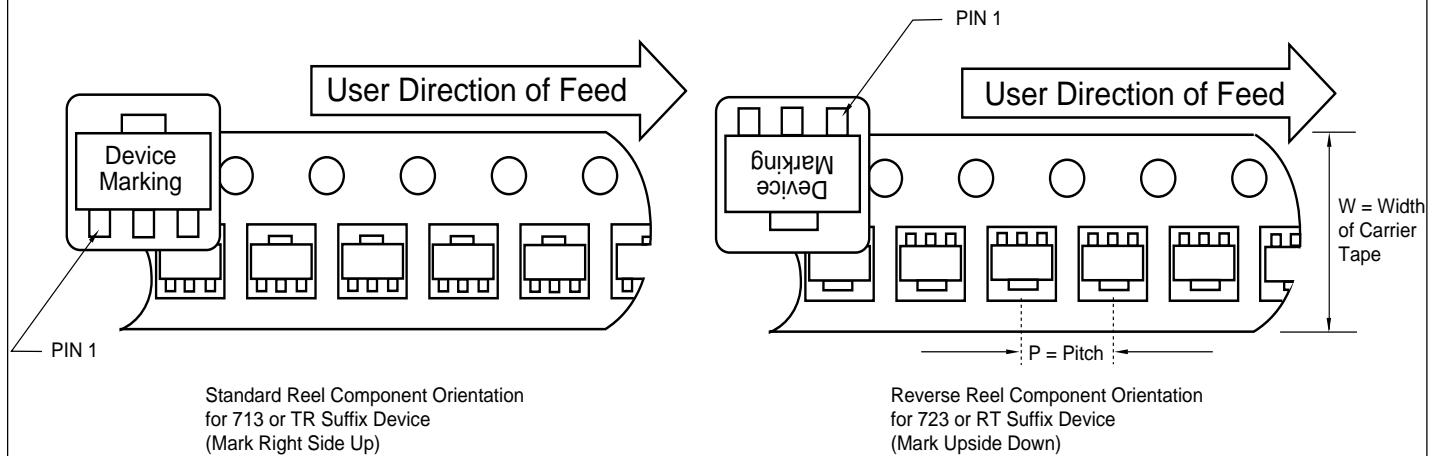

**Carrier Tape, Reel Size, and Number of Components Per Reel**

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
3-Pin SOT-89	12 mm	8 mm	1000	7 in


TAPING FORMS (Cont.)

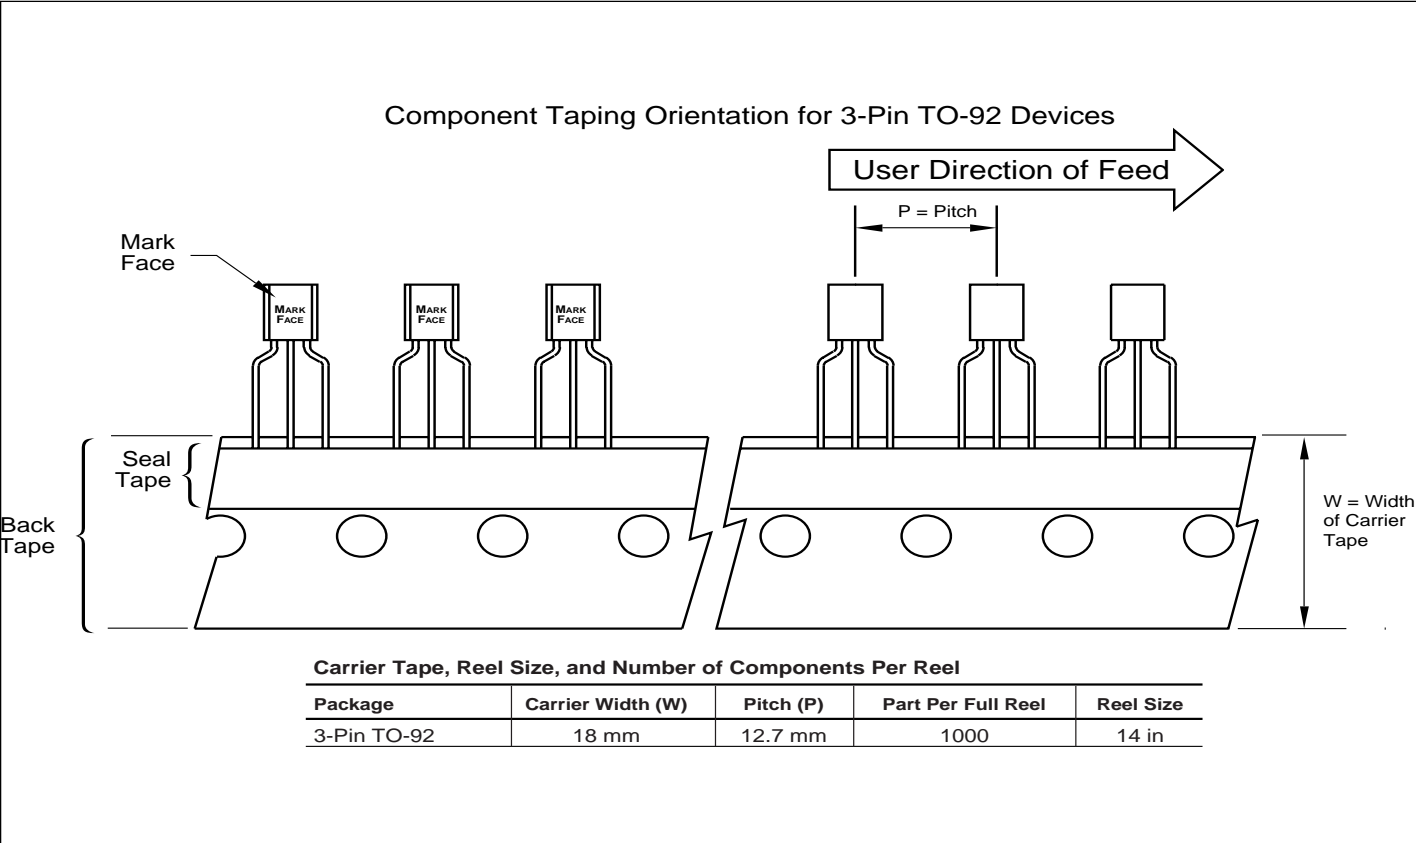

TC54 Series


TAPING FORMS (Cont.)

Component Taping Orientation for 3-Pin TO-92 (Cont.)

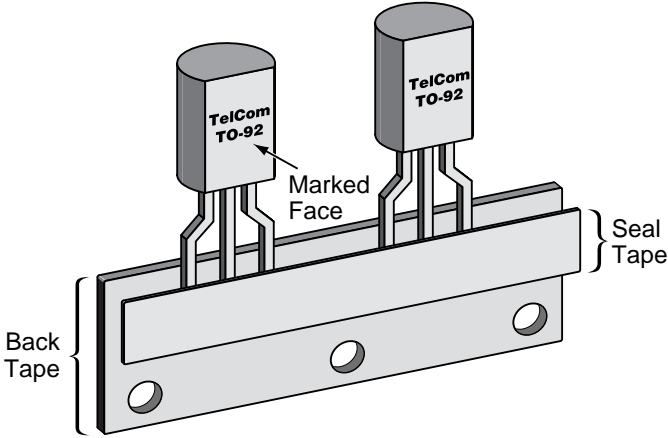


PACKAGE DIMENSIONS

3-Pin SOT-23A (EIAJ SC-59)

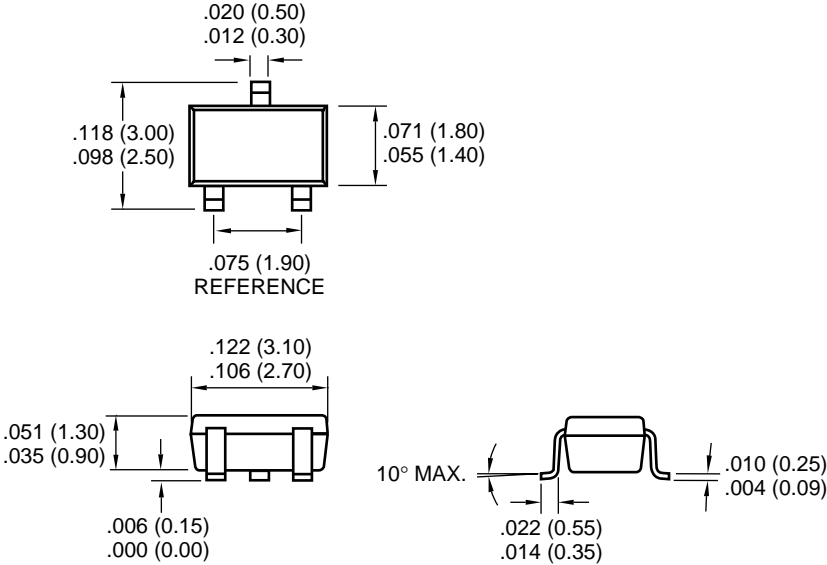

Dimensions: inches (mm)

### PACKAGE DIMENSIONS (Cont.)

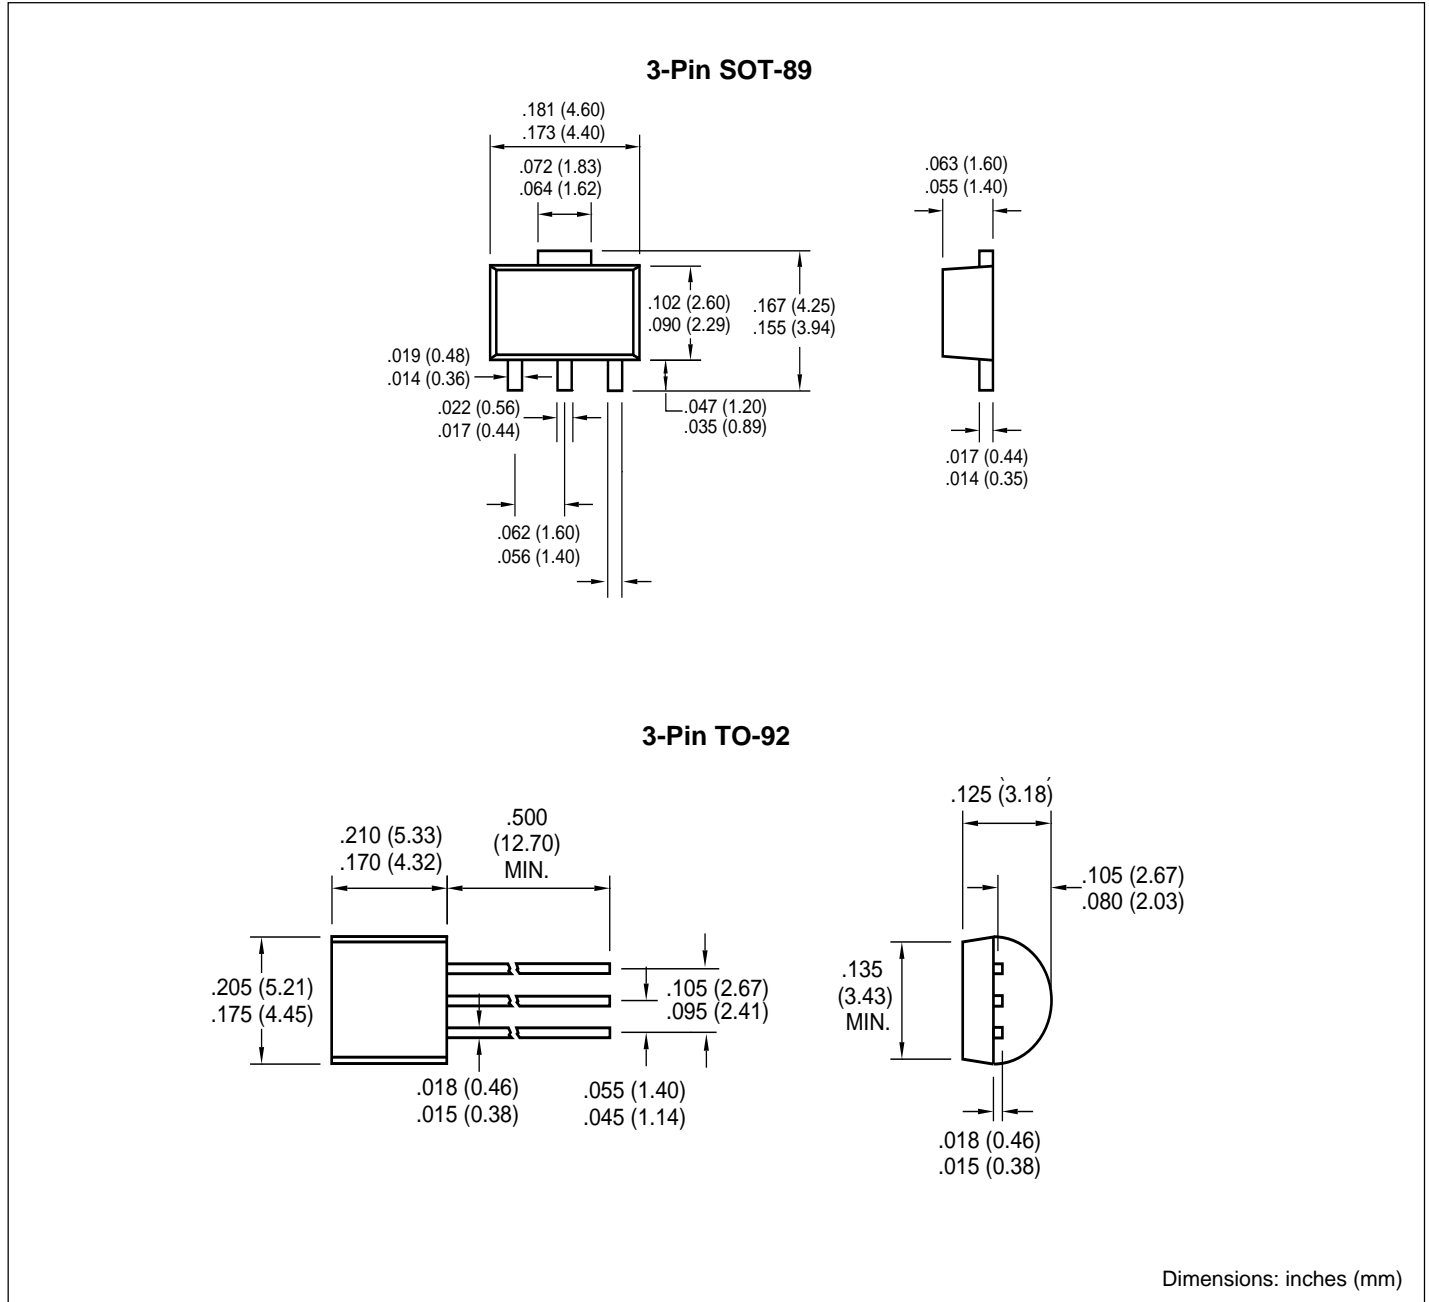

### Sales Offices

**TelCom Semiconductor, Inc.**  
 1300 Terra Bella Avenue  
 P.O. Box 7267  
 Mountain View, CA 94039-7267  
 TEL: 650-968-9241  
 FAX: 650-967-1590  
 E-Mail: liter@telcom-semi.com

**TelCom Semiconductor, GmbH**  
 Lochhamer Strasse 13  
 D-82152 Martinsried  
 Germany  
 TEL: (011) 49 89 895 6500  
 FAX: (011) 49 89 895 6502 2

**TelCom Semiconductor H.K. Ltd.**  
 10 Sam Chuk Street, Ground Floor  
 San Po Kong, Kowloon  
 Hong Kong  
 TEL: 852-2324-0122  
 FAX: 852-2354-9957