


PHOTO NOT AVAILABLE

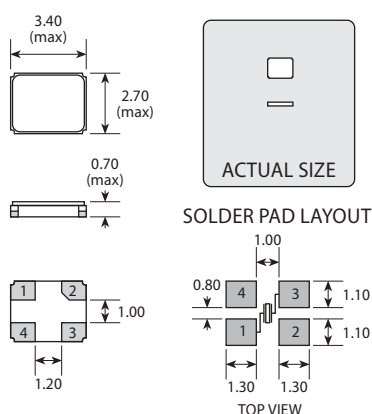

Scale 3:1

Features

- ▶ **Metal lid can be grounded to minimise EMI**
- ▶ **Seam seal for excellent long-term stability**
- ▶ **Tight specifications available**
- ▶ **Ultra-miniature for maximum space saving**

Temperature Stability

The table shows available combinations of stability (in ppm) and temperature range.

	±30	±20	±15	±10	±7.5
0 to +50°C	•	•	•	•	•
-10 to +60°C	•	•	•	•	•
-20 to +70°C	•	•	•	•	-
-30 to +80°C	•	•	•	-	-
-40 to +85°C	•	•	-	-	-

Specifications

Parameters	Product GSX-331	Option Codes
Frequency range: 16.0 ~ 40.0MHz	■	
Calibration tolerance: ±7.5ppm ±10ppm ±20ppm ±30ppm Other values	□ ■ □ □ □	M 1 2 3 specify
Temperature stability: ±7.5ppm ±10ppm ±15ppm ±20ppm ±30ppm Other values	□ ■ □ □ □ □	M 1 P 2 3 specify
Operating temperature range: 0 to +50°C -10 to +60°C -20 to +70°C -30 to +80°C -40 to +85°C Other values	□ ■ □ □ □ □	0 1 2 3 4 specify
Storage temperature range: -40 to +90°C	■	
Circuit condition: 10pF 12pF 16pF 20pF 30pF Other values	□ □ ■ □ □ □	A B D F J specify
Oscillation mode: Fundamental	■	F
Static capacitance (C₀): 7pF max	■	
Equivalent series resistance (max): 100Ω (16.0 ~ 23.9MHz) 80Ω (24.0 ~ 31.9MHz) 60Ω (32.0 ~ 40.0MHz)	■ ■ ■	
Ageing: ±1ppm max first year	■	
Test drive level: 100μW	■	
Soldering condition: 240°C, 10 sec x2 max	■	

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + option codes + frequency

eg: **GSX-331/111DF 12.80MHz** 10/10/10/16-F

GSX-331/MP2JF 24.5760MHz 7.5/15/20/30-F

Option code X (eg GSX-331/X) denotes a custom specification.

♦ Available on T&R - 3k pcs per reel.

♦ Refer to our website for T&R and soldering details.