
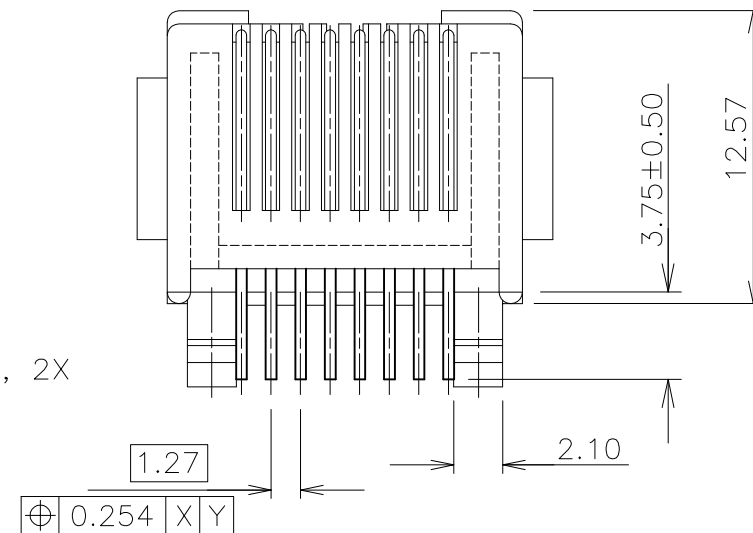
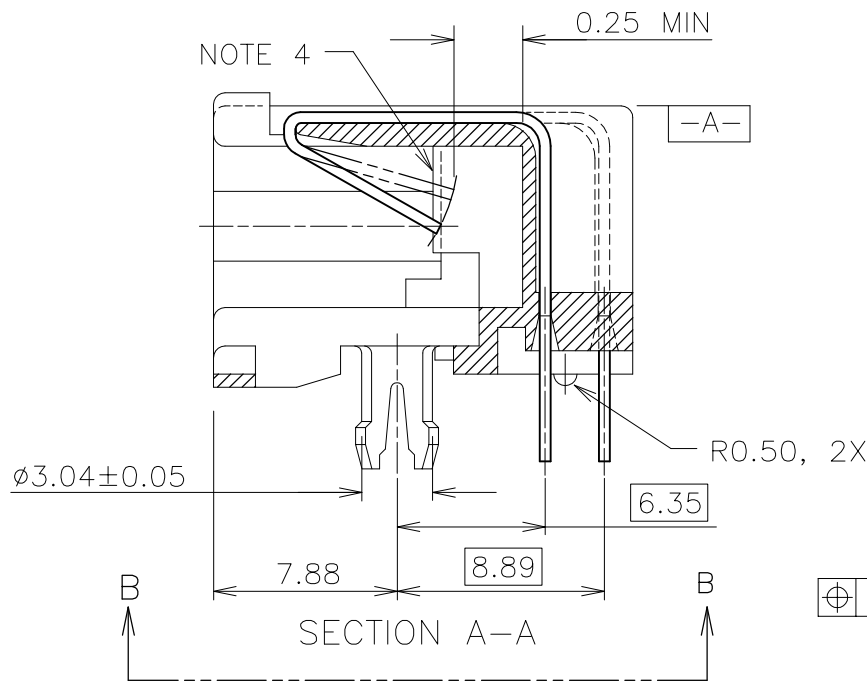
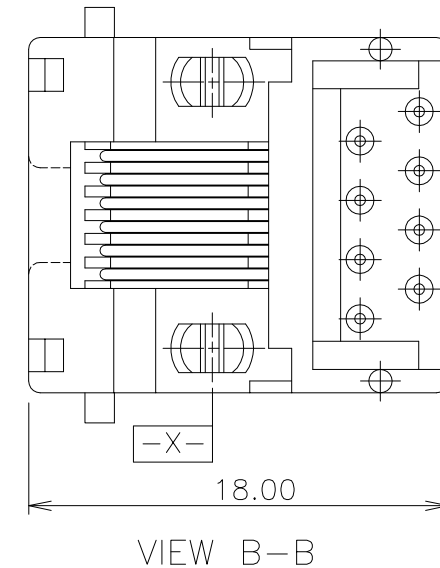
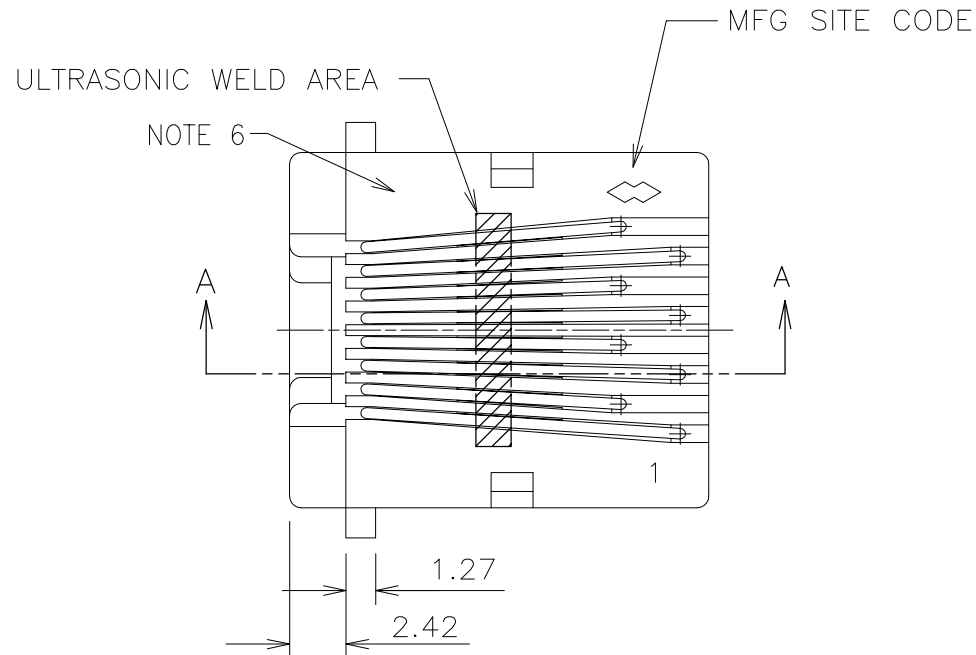


PRODUCT NO.
SEE TABLE

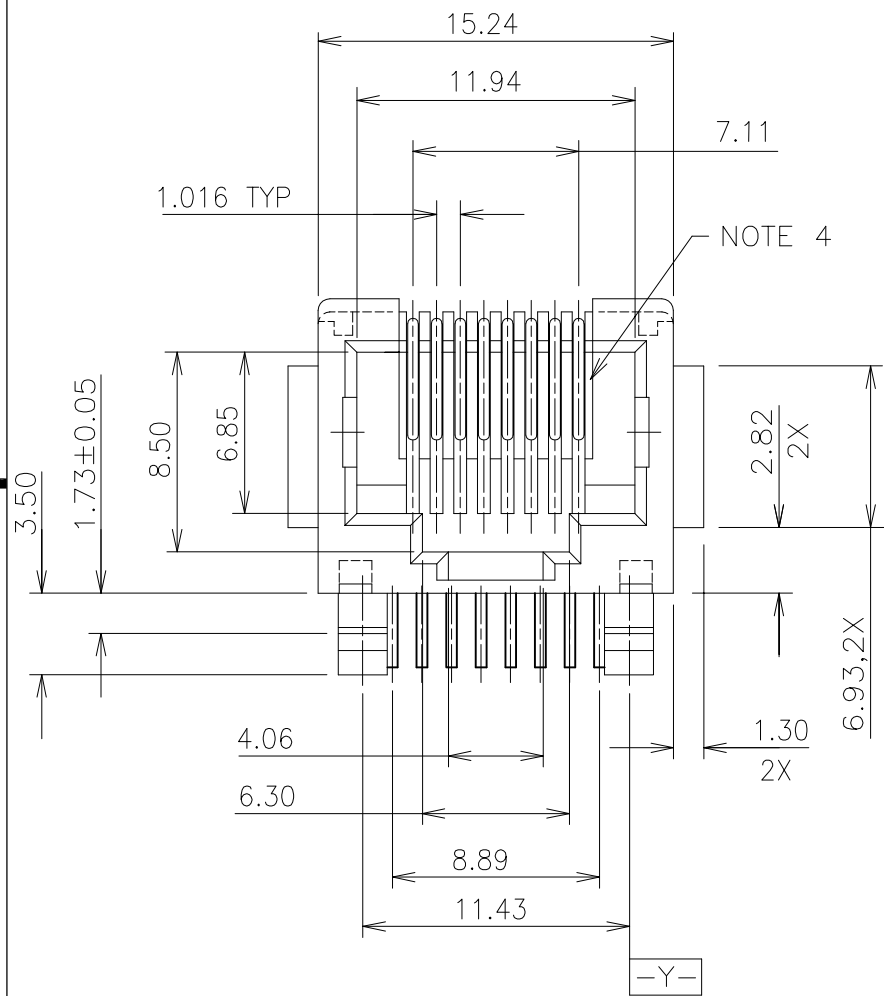

mat'l. code —				tolerances unless otherwise specified				CUSTOMER COPY			A FCI www.fciconnect.com																		
ltr	ecn no	dr	date	linear	.X ±.3				projection			title MODIFIED LOW PROFILE PCB III HORZ MOD JACK FOR 1.6MM P.C.B.																	
A	T40185		7/8/94		.XX ±.10																								
B	T50232	CL	8/11/95		.XXX ±.050																								
C	V60576	GAH	3/22/96	angles	0° ±2°							product family						MODJACK						code					
D	TDD076	BKB	3/30/00	dr	DKLIN		7/6/94					size						dwg no						213					
E	V12594	LP	3/28/02	enr	TONY CHEN		7/6/94		scale 1:1			A4						94908						sheet 1 of 2					
F	V03—1103	PJ	10/22/03	chr	TONY CHEN		7/8/94																						
G	V05—0187	LP	3/23/05	appd	TONY CHEN		7/8/94																						
sheet index		revision		G	G																								
		sheet		1	2																								


cage code
22526

ACAD


PRODUCT NUMBER	NO OF POS	LOADED POSITION
94908-X88	8	ALL POS.
94908-X86		2,3,4,5,6,7
94908-X84		3,4,5,6
94908-X84A		1,2,3,6
94908-X88LF	8	ALL POS.
94908-X86LF		2,3,4,5,6,7
94908-X84LF		3,4,5,6
94908-X84ALF		1,2,3,6

NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE.

PLATING CODE	PLATING	HSG COLOR
0	30μ " G.X.T.	BLACK
1	15μ " AU	
2	20μ " GFPD	
3	30μ " AU	
4	15μ " G.X.T	
5	50μ " AU	

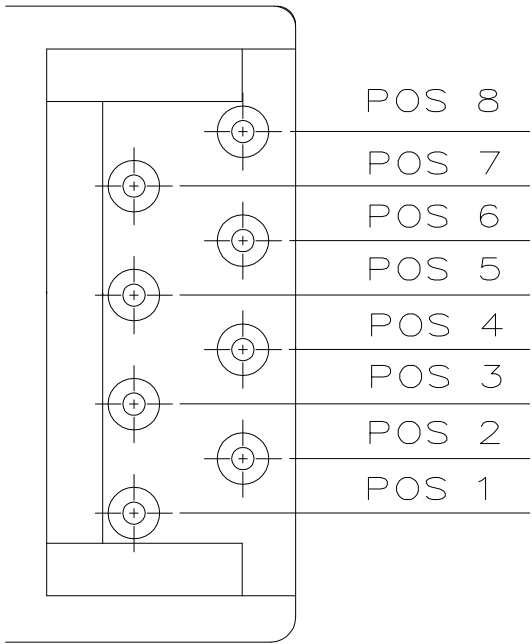

WIRE POSITION No

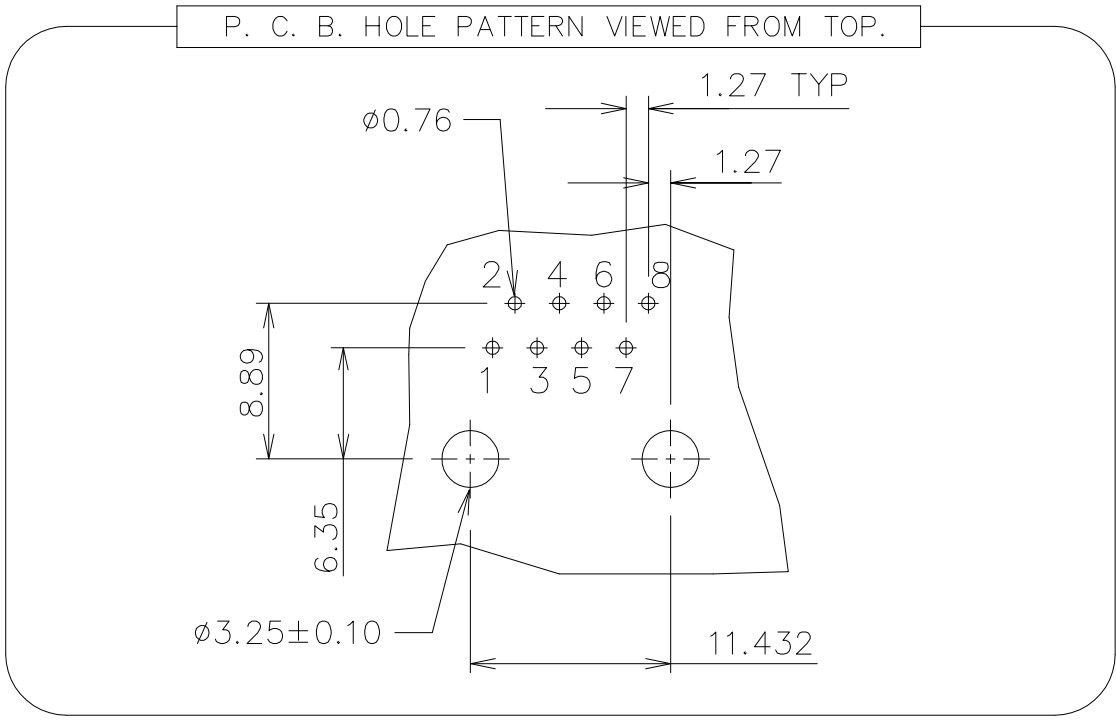

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, UL94-V0, COLOR : SEE TABLE.
THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREES C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MIN THICK CIRCUIT BOARD.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, 0.460 DIA. ROUND WIRE. SEE TABLE FOR PLATING.
4. PROTRUDED SHELF ONLY APPEARS ON 8-POS JACK.
5. STANDARD PACKAGING METHOD (USE TUBE): SEE GES-14-361. PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING SPECIFICATION GS-14-920.
6. COMPANY LOGO LOCATED IN THIS AREA ,AND WOULD APPEAR IN THE SAME SHIPMENT UNLESS LOGO SPEC HEREIN IS UPDATED.
7. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

mat'l. code —				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com title MODIFIED LOW PROFILE PCB III HORZ MOD JACK FOR 1.6MM P.C.B.									
ltr	ecn no	dr	date	linear	.X ±.3		projection 									
G					.XX ±.10											
					.XXX ±.050											
				angles	0° ±2°		MM 									
				dr	DKLIN	7/6/94										
				enrg	TONY CHEN	7/6/94										
				chr	TONY CHEN	7/8/94										
				appd	TONY CHEN	7/8/94										
sheet index	revision sheet															

cage code
22526