

# 3005 Refrigerator Door Switches *Splashproof*



**3005 25W 25T85 5E4 (50,000 Operations) 250Vac**  
**3006 65W 25T85 5E4 (50,000 Operations) 250Vac**




**RoHS compliant**

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.  
 Technical data on pages 4 & 5.

- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splashproof
- ▶ Choice of terminal orientation
- ▶ Choice of actuators

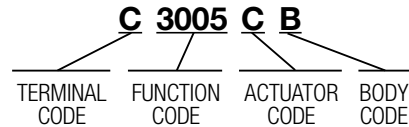

## ORDER FORMAT

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<b>C</b>  6.3 x 0.8 9.1	<b>3005</b>  ON - OFF (momentary OFF) 1mm max travel to OFF position	<b>B</b>  26.0	<b>3005 or 3006</b>  Terminal direction (viewed from hinge end) Panel cut-out 12.1/12.2 x 25.4/25.5 Bezel 14.0 x 30.2	<b>Finish</b> Gloss finish only  <b>Color</b> White is standard  Call factory for custom colors A full range is available for large orders
<b>H</b>  4.8 x 0.8 9.1	<b>3006</b>  ON - OFF (momentary ON) 3mm min travel to ON position	<b>C</b>  13.0	<b>3005 only</b>  Terminal direction (viewed from hinge end) Panel cut-out 12.1/12.2 x 25.4/25.5 Bezel 18.0 x 30.2	

**Dimensions (mm) (C terminals shown)**

