

[Molex.com](#)

English
日本語
한국어
简体中文

[Register | Login](#)
[My Parts \(0 items \)](#)

Search site: Search: [Go](#)

- Product Name**
- Cross-Ref**
- Catalog**
- Literature**
- Industries**
- Standards**
- Contact Us**
- About Us**
- Investors**
- Careers**

- [Connectors](#)
- [Sockets](#)
- [I/O Connectors](#)
- [Cable Assemblies](#)
- [Fiber Optics](#)
- [Printed Circuit Products](#)
- [Industrial Products](#)
- [Lighting Products](#)

Switch Language

- [Home](#)
- [PCB Headers](#)
- [Datasheet](#)

Need Assistance?

- [Contact Us](#)
- [Find a Distributor](#)
- [Order Samples](#)
- [Tech Library](#)
- [Ecocare](#)
- [Electrical Models](#)

[Printer-friendly page](#)

[Email this page](#)

Part Number:

0873320621

Status:


Obsolete

Description:

2.00mm (.079") Pitch Milli-Grid™ Header, Surface Mount, Vertical, Shrouded, 6 Circuits, 0.76µm (30µ") Gold (Au) Selective Plating, with Slot, Stand-off, with PCB Locator

Replacement Part Number:

878320621

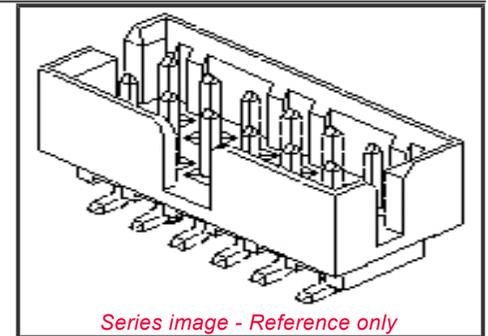

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*

[Drawing \(PDF\)](#)

[Datasheet \(PDF\)](#)

RoHS

EU RoHS

Not RoHS Compliant

China RoHS



REACH SVHC

Contains SVHC: No

Halogen-Free Status

Not Reviewed

Need more information on product environmental compliance?Email productcompliance@molex.comFor a multiple part number RoHS Certificate of Compliance, [click here](#)Please visit the [Contact Us](#) section for any non-product compliance questions.**Search Parts in this Series**[87332Series](#)**Mates With**[50394](#), [51110](#), [87568](#)[Certificate of Compliance \(PDF\)](#)**Order Products:****Part Detail:** ([show all](#))[General](#)[Physical](#)[Electrical](#)[Agency Certification](#)[Solder Process Data](#)[Material Info](#)**General**

Product Family	PCB Headers
Series	87332
Application	Wire-to-Board
Obsolete Date	2004/01/01
Product Name	Milli-Grid™

Physical

Circuits (Loaded)	6
Circuits (maximum)	6
Flammability	94V-0
Glow-Wire Compliant	No
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Thickness Recommended (in)	0.031 In
PCB Thickness Recommended (mm)	0.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Polarized to PCB	No
Shrouded	Fully
Temperature Range - Operating	-55°C to +105°C

Electrical(Please review the Product Specification for specific details.)

Current - Maximum per Contact	2A
Voltage - Maximum	125V

Agency Certification

CSA	LR19980
UL	E29179

Solder Process Data

Lead-free Process Capability	Reflow Capable (SMT only)
Process Temperature max. C	245
Replacement RoHS Compliant Part Number	0878320621

Material Info

