


PCB CONNECTORS - STRAIGHT SOLDER TAIL

Series PCB Connectors - Straight solder tail
850 Single row
 1.27 mm, Straight solder tail

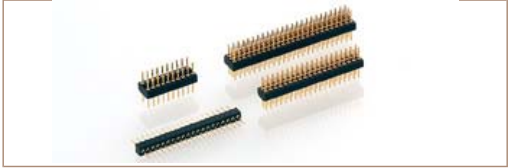

Ultraminiature PCB pin connectors, solder tail.

Technical specs.:

Insulator: Black glass filled polyester
 PCT-GF30-FR
Flammability: UL 94V-O
Contact: Brass CuZn36Pb3 (C36000)
Connecting pin Ø: 0.41 mm
Mechanical life: Min. 500 cycles
Rated current: 1 A
Dielectric strength: Min. 1000 V RMS

Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
10	Gold 0.25 µm	Gold 0.25 µm
80	Tin	Tin

NNN number of poles. Replace **NNN** with the requested number of poles, e.g. 852-10-**NNN**-10-001101 for a double row version with 16 pins becomes 852-10-**016**-10-001101.

General technical specs. ...

850-PP-NNN-10-001101

Straight pin connector: solder tail, single row.

Availability from: 2 to 50 contacts.
 Standard number of contacts 25 and 50.