

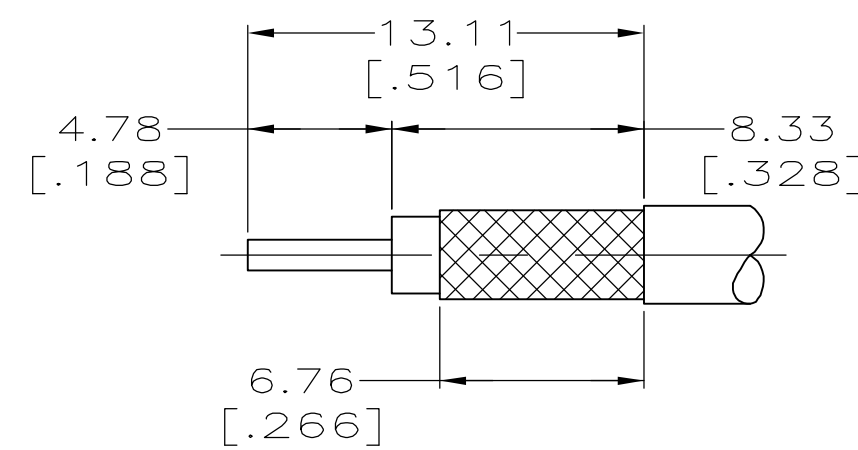
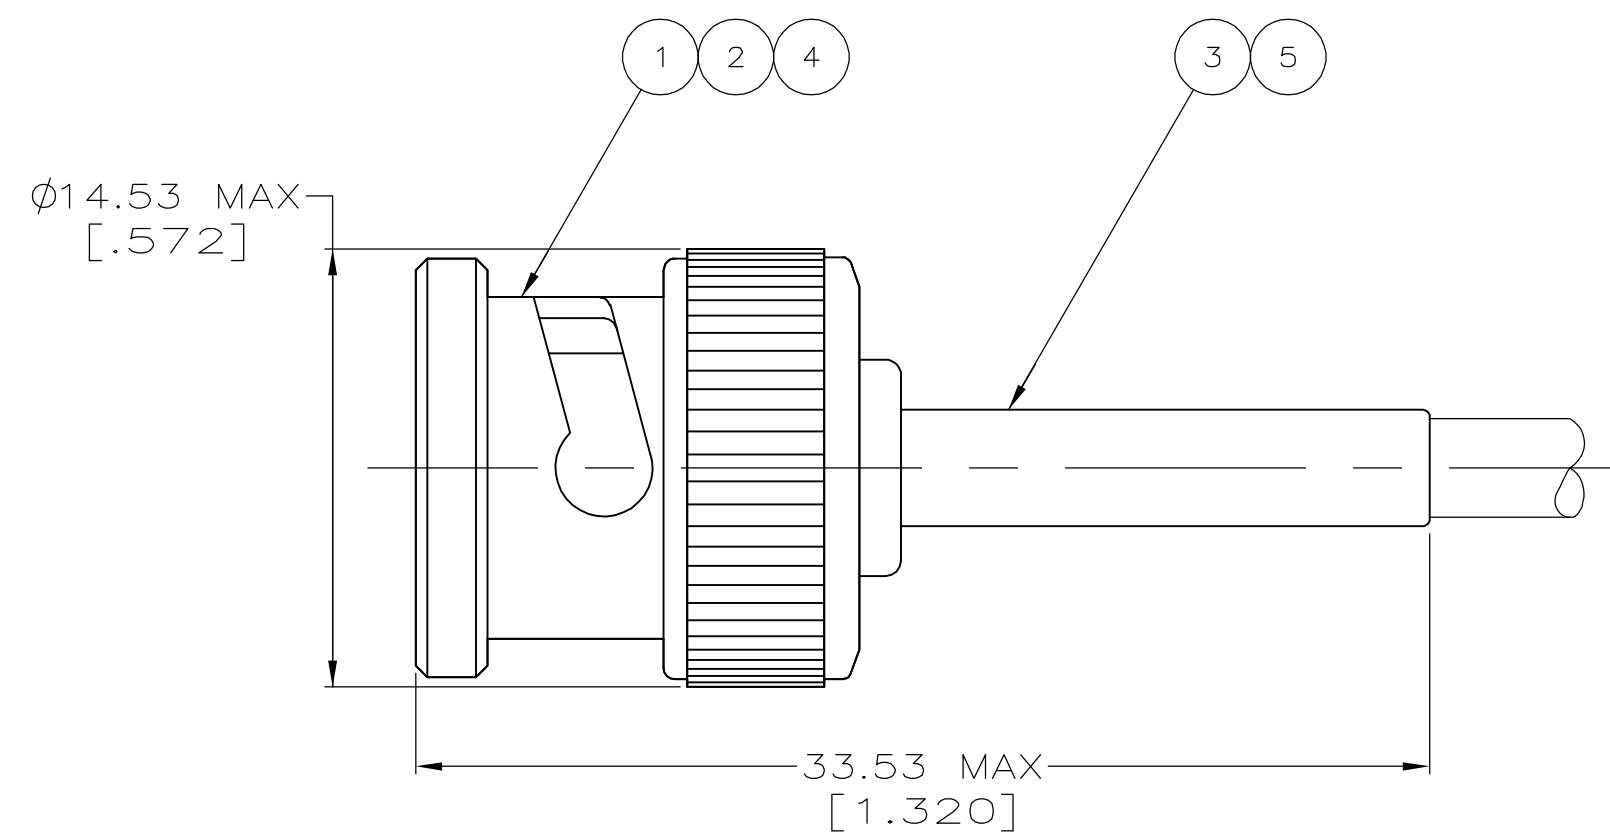


FIGURE 1

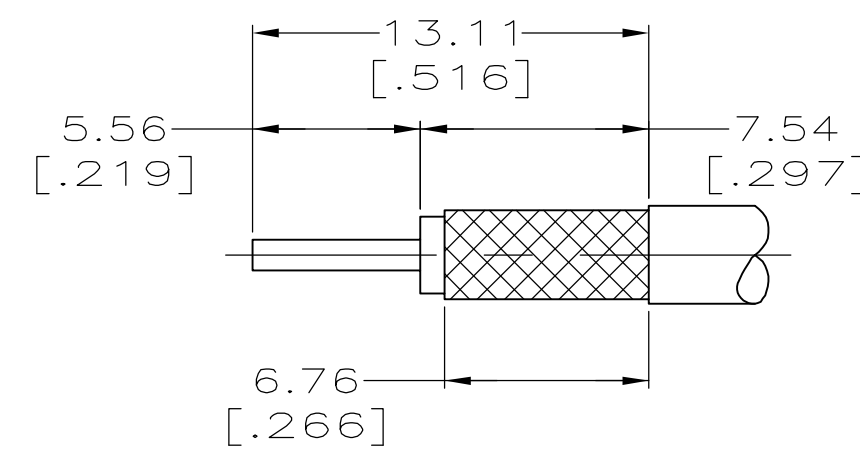


FIGURE 2

RECOMMENDED STRIP LENGTH

- ① CABLE USED WITHOUT SPACER
- ② CABLE USED WITH SPACER
3. SEE I.S. 9021
4. PARTS PACKAGED UNASSEMBLED
- ⑤ USE AMP HAND TOOL: 220190-1
- ⑥ SPECIAL PACKAGING: INDIVIDUALLY PACKAGED IN PRE-PRINTED BAG WITH SPECIAL GRAPHICS
- ⑦ CONNECTOR INDIVIDUALLY PACKAGED
- ⑧ BULK PACKAGE
- ⑨ RG-188/U, 316/U TYPE DOUBLE BRAID AND JIS CABLES 1.5D-2V, 1.5D-XV & 1.5D-XVS
- ⑩ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES

	OBSOLETE		RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	227423-1	9-221132-1	222246-6	413636-2	9-221128-9						
	OBSOLETE		BELDEN 9907, 89907 & RG-141/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	1-222246-6	413636-1	9-221128-8						
	OBSOLETE		RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	9-221128-7						
			RG-179/U, 187/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-3	413636-3	9-221128-6						
			RG-174/U, 188/U, 316/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-0	413636-3	9-221128-5						
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	9-221128-4						
	OBSOLETE		BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	9-221128-3						
	OBSOLETE	  	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	9-221128-2						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	9-221128-1						
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	9-221128-0						
	OBSOLETE		BELDEN 1167A	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-0	413636-3	3-221128-4						
	OBSOLETE	 		4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-2	1-222246-0	413636-3	3-221128-2						
		 	JIS CABLE 3D-2V	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	8-221132-9	1-222246-6	413636-6	3-221128-1						
SUPERSEDED BY 2-221128-5			RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	3-221128-0						
	OBSOLETE	-		4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-2	1-222246-0	413636-3	2-221128-9						
			BELDEN 9907, 89907 & RG-141/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	1-222246-6	413636-1	2-221128-7						
	OBSOLETE		RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	2-221128-5						
			RG-179/U, 187/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-3	413636-3	2-221128-3						
			RG-174/U, 188/U, 316/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-0	413636-3	2-221128-1						
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	2-221128-0						
SUPERSEDED BY 1-221128-2			BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	1-221128-9						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	227423-1	9-221132-1	222246-6	413636-2	1-221128-8						
			BELDEN 9266	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-1	222246-2	413636-2	1-221128-7						
	OBSOLETE	-	BELDEN 9209	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-1	222246-6	413636-5	1-221128-6						
SUPERSEDED BY 1-221128-2			BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	1-221128-5						
	OBSOLETE	  	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-6	413636-2	1-221128-4						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	1-221128-3						
	OBSOLETE		BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	1-221128-2						
		  	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	1-221128-1						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
			RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	1-221128-0						
	OBSOLETE	-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-7	413636-4	221128-9						
	OBSOLETE	 	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-8	413636-2	221128-8						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE	-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-7	413636-1	221128-7						
SUPERSEDED BY 221128-3		-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	221128-6						
		  	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-6	413636-2	221128-5						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
SUPERSEDED BY 221128-2		 	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	221128-4						
SUPERSEDED BY 221128-1		-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	221128-4						
	OBSOLETE	-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	221128-3						
		 	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	221128-2						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
		-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	221128-1						
	REMARKS	FOR USE WITH CABLE			FERRULE			CONTACT	DIE SET 	STRIP LENGTH	⑤	TUBING QTY=1	④	SPACER QTY=1	③	FERRULE QTY=1	②	CONTACT, PLUG QTY=1	①	PLUG ASSEMBLY QTY=1	PART NUMBER
					HEX CRIMP HEIGHTS																

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 11-18-92 M. E. COWHER QWK 1-29-93 M. PHILLIPS APVD 1-29-93 M. PHILLIPS PRODUCT SPEC APPLICATION SPEC		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 1 PLC ± 2 PLC ± 0.41 [0.016] 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		PLUG, COMMERCIAL BNC	
MATERIAL -		WEIGHT -		SIZE CASE CODE DRAWING NO RESTRICTED TO	
				A1 00779 C-221128	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A1	