


N, BNC, TNC SERIES
35 WATTS

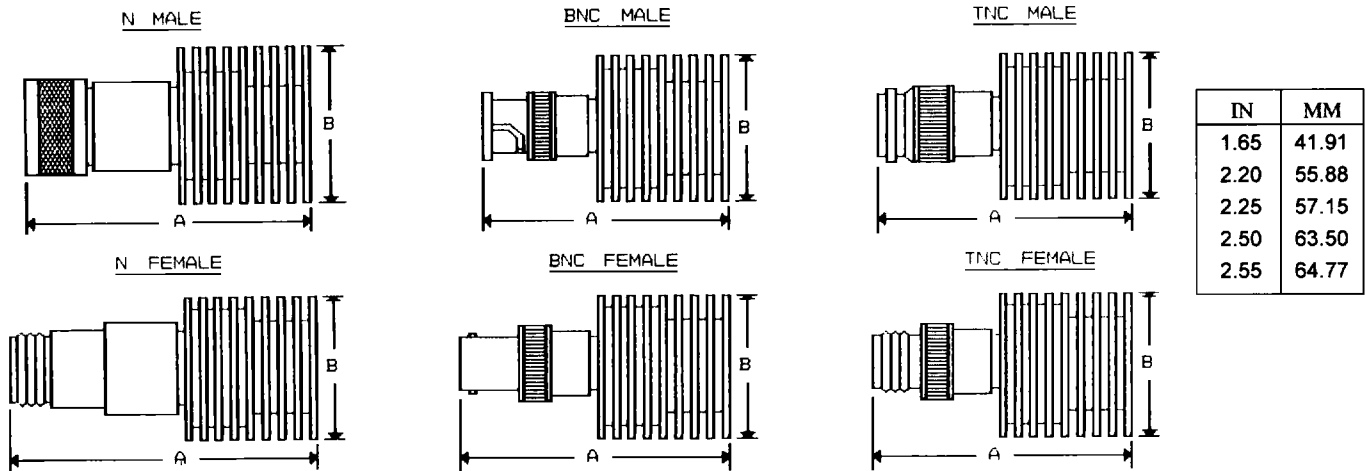

MECHANICAL SPECIFICATIONS

- Connector : Brass, Nickel Plated.
- Contact : Brass, Silver Plated
- Housing : Aluminum, Black Anodized
- Insulator : Teflon, Virgin Grade.

ELECTRICAL SPECIFICATIONS

- Frequency : See Table.
- VSWR (Max.) : See Table.
- Impedance : 50 Ohms.
- Power (Avg.) : 35.0 W.
- (Peak) : 3.0 KW.

CGI P/N	CONNECTOR	FREQUENCY	VSWR	A	B	WEIGHT (GRAMS)
CFT-35 NM	N-MALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.15:1 1.20:1	2.50	1.65	110.0
CFT-35 NF	N-FEMALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.15:1 1.20:1	2.55	1.65	105.0
CFT-35 BM	BNC-MALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.20:1 1.30:1	2.20	1.65	75.0
CFT-35 BF	BNC-FEMALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.20:1 1.30:1	2.25	1.65	75.0
CFT-35 TM	TNC-MALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.15:1 1.20:1	2.20	1.65	80.0
CFT-35 TF	TNC-FEMALE	DC - 2.0 GHz 2.0 - 4.0 GHz	1.15:1 1.20:1	2.25	1.65	76.0

COMPONENT GENERAL, INC.

2445 Success Drive, Odessa, Florida 33556 • Phone (813) 376-6655 • Fax (813) 372-9096