


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

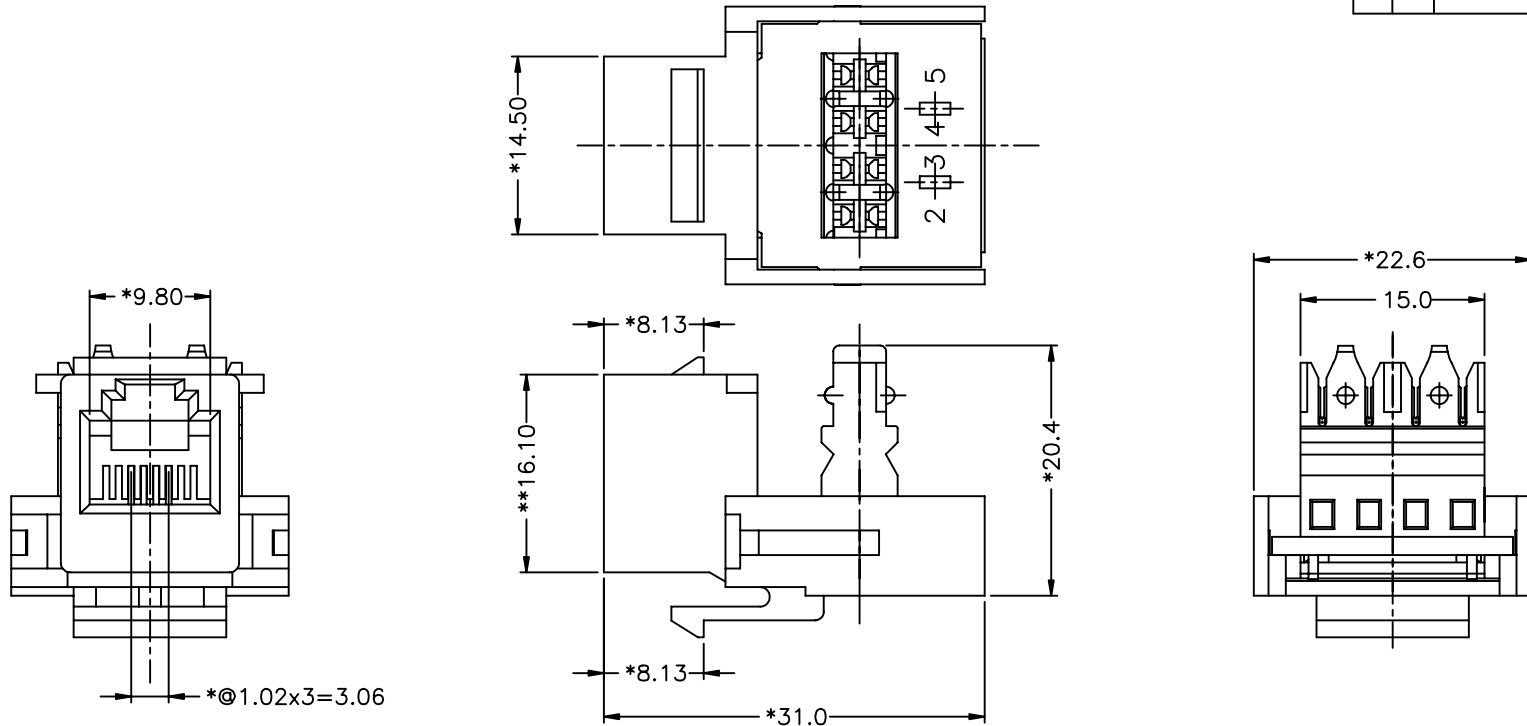

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN.


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : 0°C TO 70°C.

MECHANICAL:

1. JACK HOUSING MATERIAL: PC UL94V-0, COLOR: SNOW-WHITE
2. INSERT MATERIAL: PBT+15%GF UL94V-0. COLOR: BLACK
3. PCB MATERIAL: FR-4 THICKNESS: 1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE, SELECTIVE GOLD PLATING OVER NICKEL IN CONTACT AREA AND TIN LEAD ON SOLDERING AREA.
5. 110 IDC HOUSING: PC UL94V-0.
6. TERMINALS: PHOSPHOR BRONZE AND SILVER 20u" OR TIN 100u" PLATED.
7. WIRE: 24 #AWG
8. ROHS COMPLIANT

PART NUMBER: E6164-B20XXX-L



FULL RISE ELECTRONIC CO., LTD

TITLE C3 KEYSTONE JACK UNSHIELDED (110 ADVANCED TYPE)

DRAWING NO. GE613002-LC SIZE A3 REV 0

DO NOT SCALE DRAWING SHEET 1 OF 1

DETACHED LISTS	MM (INCH)		DFTO Angela	DATE 06/28/06
	TOLERANCES EXCEPT AS NOTED		CHKD ZBX	DATE 2006/6/28
	MM		MFO	DATE
	.0 ± 0.2	±	APPVL SAMMY	DATE 2006/6/28
	.00 ± 0.15	±	MATERIAL :	
.000 ± 0.075	±	QT'Y :		
ANGLES ± 0.5		FINISH :		
THIRD ANGLE PROJECTION		SCALE : 1:1		