


Female cable connector with IDC termination - 4 ROWS

Features

- Two terminal blocks of two IDC rows each. Equal contact length for all rows
- IDC termination with individual strain relief
- Wire size: AWG 26 and AWG 28 / AWG 30
- Maximum wire insulation diameter 0.75 mm
- Maximum cable outside diameter :
- 6 mm for the 24 positions
- 7.5 mm for the 48 positions
- Field repairable
- Standard cable outlet
- Angled cable outlet
- Special low profile connector and cable outlet: see page 58
- For termination tooling: see page 74

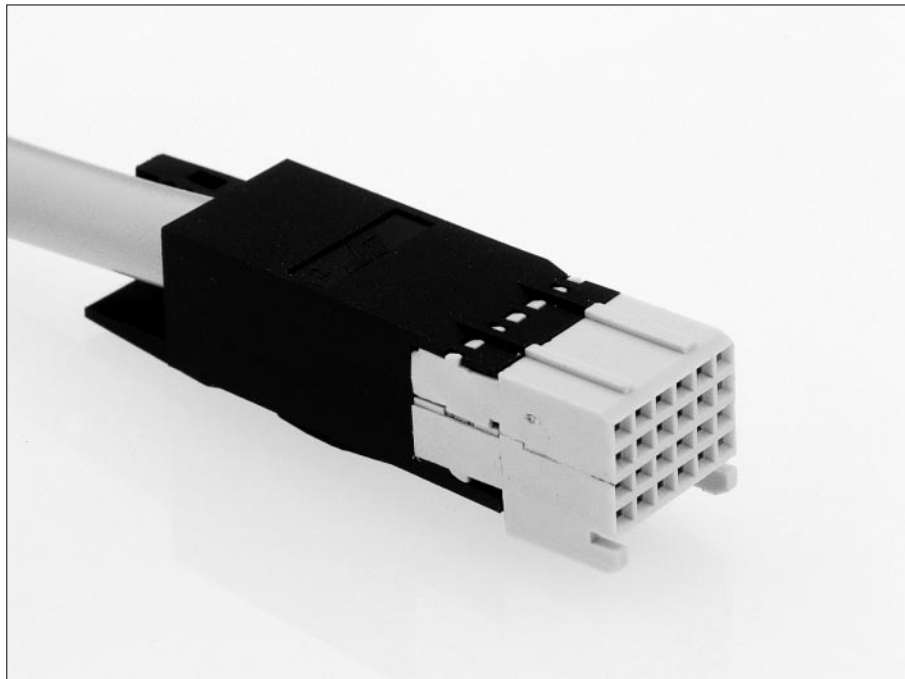



Ordering information

Number of contacts and wire size	Part Number (P/N)	Replace "x" by letter
24 (AWG 26)	HM1 C01 D2x 010 N9	C = with standard cable outlet 0 = without cable outlet (see note)
24 (AWG 30)	HM1 C01 D0x 010 N9	
48 (AWG 26)	HM1 C02 D2x 010 N9	
48 (AWG 30)	HM1 C02 D0x 010 N9	

Note: for angled cable outlet, see page 58.

Female cable connector with IDC termination - 4 ROWS

24 positions

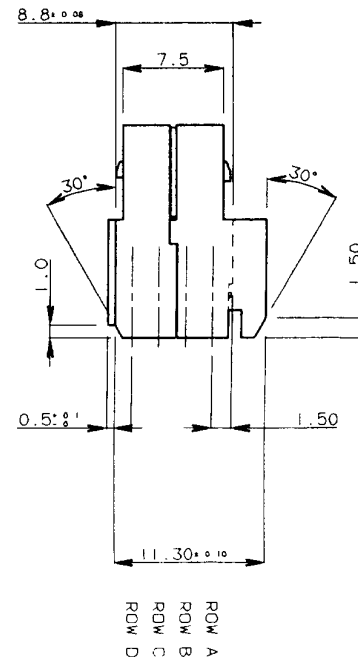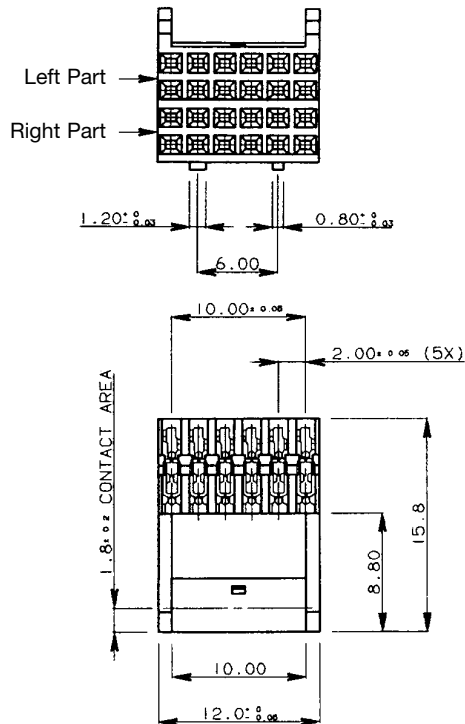

Connector with cable outlet

48 positions

