
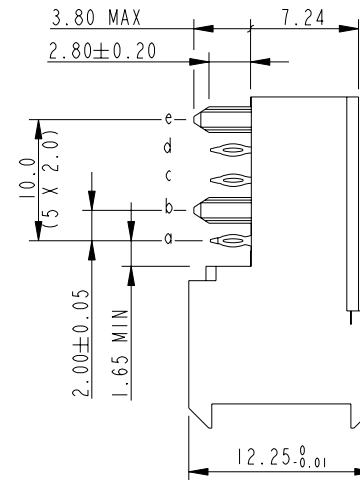
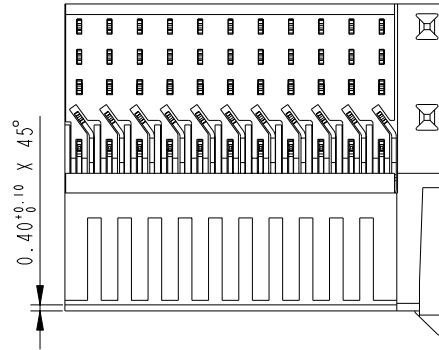
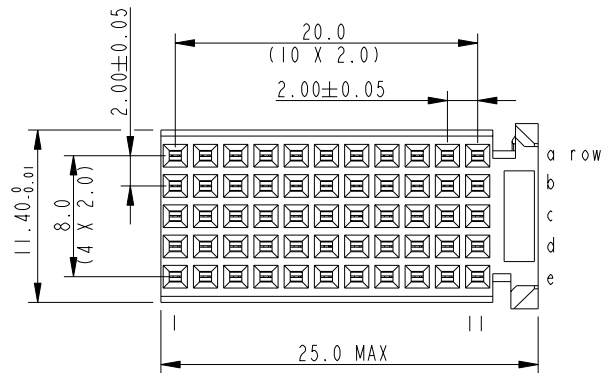


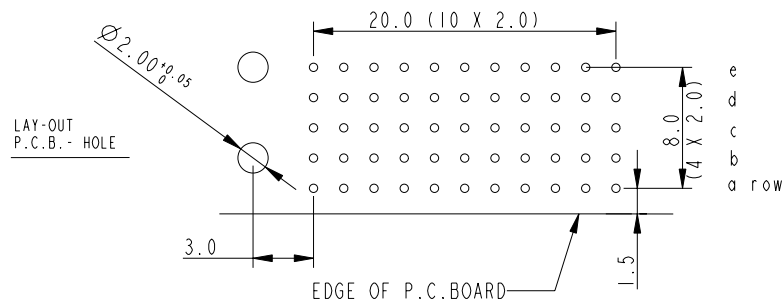

PERFORMANCE CHARACTERISTICS

SURGE CURRENT RATING : 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)

OPERATING TEMPERATURE -55°C TO 125°C

OPERATING TEMPERATURE -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE :0.75 N MAX /CONT

EXTRACTION FORCE: 0.15 N MIN /CONT

INSULATION RESISTANCE : 10^4 MΩ MIN

NOTES

1. " C"


PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BS,C ,201844,003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A .201572.001
4. THE PRODUCT (C) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 EXCEPT FOR LEAD.

[illegible]

Material			Spec ref		
Mat code			✓	tolerance	projection
Heat treat				IDEC ± 0.2 IDEC 20EC ± 0.1 20EC ANGLES ± 1° HOEKEN	
Plating/Finish					
Dr	JM Guo	11-08-05			
Eng	COLLINS LU	11-08-05	Product family	MILLIPACS	size A4
Chr	VICTOR LIN	11-08-05	Model Name	HM2R03PA5100--C	ECN DG05-0262
Appr	JOSEPH HSIA	11-08-05	Model Revision	REL Level	
		title MPACS 5+2R RA RCP CONN TYPE C (CISCO)		dwg no BSC201419028	
Rev. A		Pro/E file		catalog no HM2R03PA5100--C	CUSTOMER DRAWING
				sheet 1 of 1	