



SOJ (Live Bug)

IC107 Series

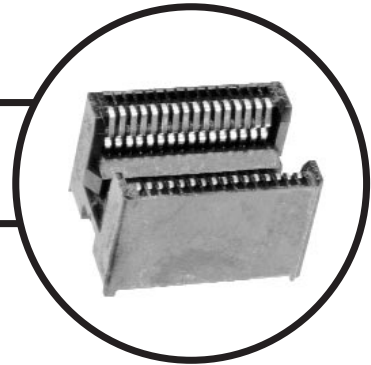

IC107-26 03--MF-G**


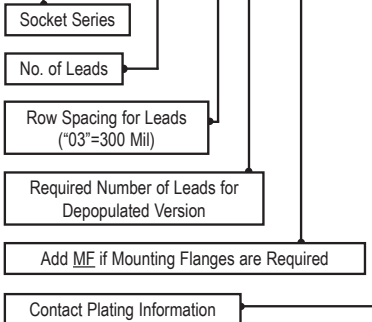


Characteristics


Insulation Resistance:	1,000M Ω minimum at 500 VDC
Withstanding Voltage:	700 VAC for 1 Minute
Contact Resistance:	30m Ω max. at 10mA/20mV (Initial)
Operating Temperature:	-55°C ~ +170°C

Material

Insulator:	PEI (Glass Filled) UL94V-0
Contact:	Beryllium Copper
Plating:	Gold over Nickel



Contact Detail



Part Number	Row	No. of Leads	DIMENSIONS		
	Spacing		A	B	C
IC107-2403-****-G	300	24	18.8	15.6	15.0
IC107-2603-20**-G	300	20	20.1	15.6	15.0
IC107-2603-****-G	300	26	20.1	15.6	15.0
IC107-2603-24**-G	300	24	21.4	15.6	15.0
IC107-2803-****-G	300	28	21.4	15.6	15.0
IC107-4003-XXXX-G	300	32	24.0	15.6	15.0
IC107-3203-****-G	300	40	29.0	15.6	15.0
IC107-26035-20**-G	300	20	20.1	16.8	15.0
IC107-26035-****-G	350	26	20.1	16.8	15.0
IC107-2804-24**-G	350	24	21.4	18.0	15.0
IC107-2804-****-G	400	28	21.4	18.0	15.0
IC107-3204-****-G	400	32	24.0	18.0	15.0
IC107-3604-****-G	400	36	26.5	18.0	15.0
IC107-4004-****-G	400	40	29.0	18.0	15.0
IC107-4204-****-G	400	42	30.3	18.0	15.0
IC107-4404-****-G	400	44	31.6	18.0	15.0
IC107-3405-****-G	500	34	25.2	20.7	15.0