


1.00mm Pitch

Series 6228




LIF Right Angle Through-Hole (Top Contact)

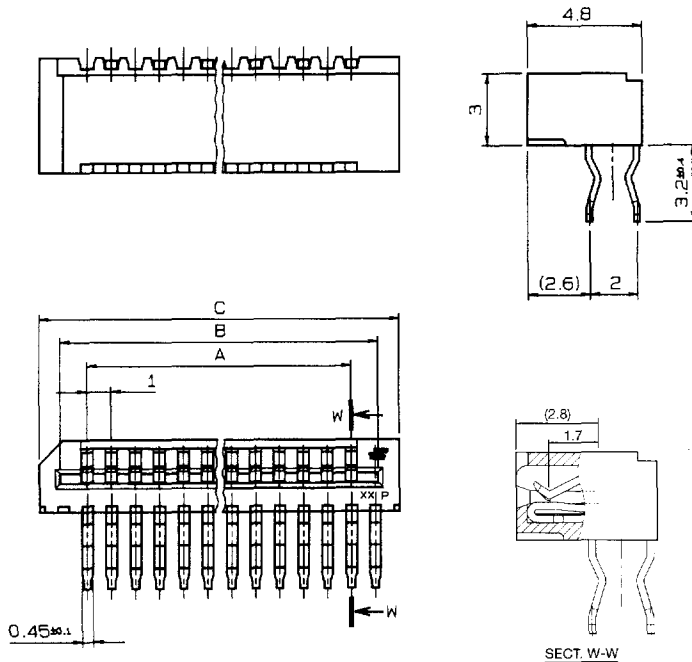

Specifications

- Number of Contacts – 3-22
- Tray Packaged
- Voltage – 50 V
- Current Rating – 0.5 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-20°C - +85°C)
- Contact Material – phosphor bronze (tin-lead plated)
- Insulator Material – 66 nylon, natural color (UL 94 V-O)
- FFC/FPC Thickness – 0.3 ±0.05 mm (0.012 ±0.002")
- PCB Thickness – 1.60mm
- Profile Height – 3.00mm right angle
4.80mm straight

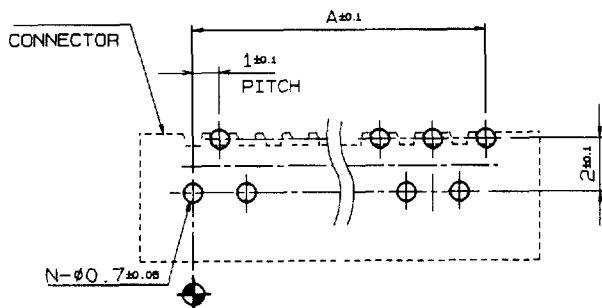

MOUNTING LAYOUT
(t=1.6mm)

	FFC	FPC
P	±0.05	±0.02
W	±0.03	+0.1 -0.05
M	±0.1	±0.05

FFC, FPC SPECIFICATION

ORDERING CODE

00 6228 0XX 2X1 800

NUMBER OF CONTACTS (03-22)
TRAY PACKAGE
0=TAIL 3.2mm
2=TAIL 2.5mm

PART NUMBER	NO. OF CONTACTS	A	B	C	QTY. PER TRAY
00 6228 003 2X1 800	3	2.0	4.06	6.0	600
004	4	3.0	5.06	7.0	510
005	5	4.0	6.06	8.0	450
006	6	5.0	7.06	9.0	400
007	7	6.0	8.06	10.0	360
008	8	7.0	9.06	11.0	320
009	9	8.0	10.06	12.0	300
010	10	9.0	11.06	13.0	270
011	11	10.0	12.06	14.0	250
012	12	11.0	13.06	15.0	240
013	13	12.0	14.06	16.0	220
014	14	13.0	15.06	17.0	210
015	15	14.0	16.06	18.0	200
016	16	15.0	17.06	19.0	190
017	17	16.0	18.06	20.0	180
018	18	17.0	19.06	21.0	170
019	19	18.0	20.06	22.0	160
020	20	19.0	21.06	23.0	150
021	21	20.0	22.06	24.0	150
00 6228 022 2X1 800	22	21.0	23.06	25.0	140

(Dimensions: mm)