

THE INFORMATION CONTAINED HEREIN IS CONSIDERED PROPRIETARY TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

ELECTRICAL CHARACTERISTICS (@25°C)

NOMINAL TURNS RATIO:
 (1-5) : (10-6) 1 : 3.33
 CONNECT TERMINAL 2 TO 4 AND 7 TO 9

DC RESISTANCE:
 (1-4) 0.20 Ω MAX
 (2-5) 0.20 Ω MAX
 (10-7) 0.55 Ω MAX
 (9-6) 0.55 Ω MAX

INDUCTANCE @ 10 kHz, 0.1 Vrms:
 (10-6) 800 μH ± 5%
 CONNECT TERMINAL 7 TO 9


LEAKAGE INDUCTANCE:
 (10-6) 10 μH MAX
 CONNECT TERMINAL 2 TO 4 & 9 TO 7 & 1 TO 5

MINIMUM DIELECTRIC RATING:
 BETWEEN (1-5) & (10-6) 1500 Vrms
 CONNECT TERMINAL 2 TO 4 & 9 TO 7

DESIGNED TO COMPLY WITH THE REQUIREMENTS OF UL1950 AND EN60950


OPERATING TEMPERATURE RANGE: -40°C TO +85°C

SCHEMATIC



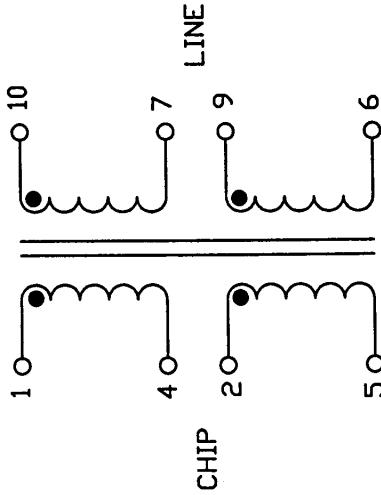


DRAWN R. HARRIS/CANNY 01-08-02		DATE 01-08-02		TITLE ELECTRICAL SPECIFICATION		PART NO. / DRAWING NO. 0560-6600-AG		STANDARD DIM. TOL. IN INCH .X		[] METRIC DIM. AS REFERENCE UNIT : INCH [mm] SCALE : N/A		REV. : A		PAGE : 2	
CHKD J. BERRY/01-08-02		DATE 01-08-02		FILE NAME 05606600AQA.DWG		.XX		.XXX		⊕		SIZE : A4			

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

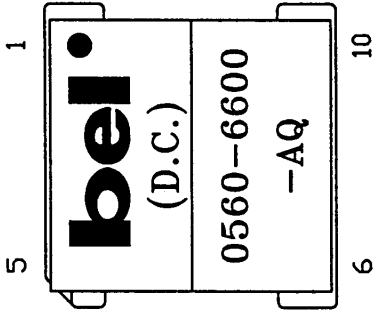

BOTTOM VIEW

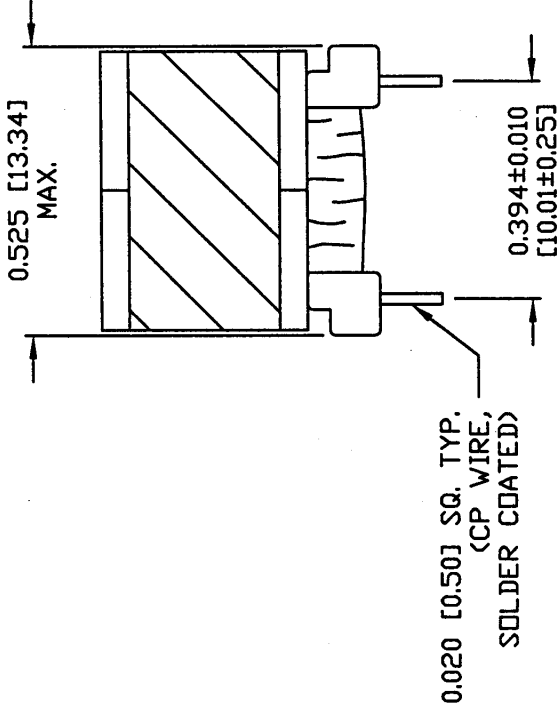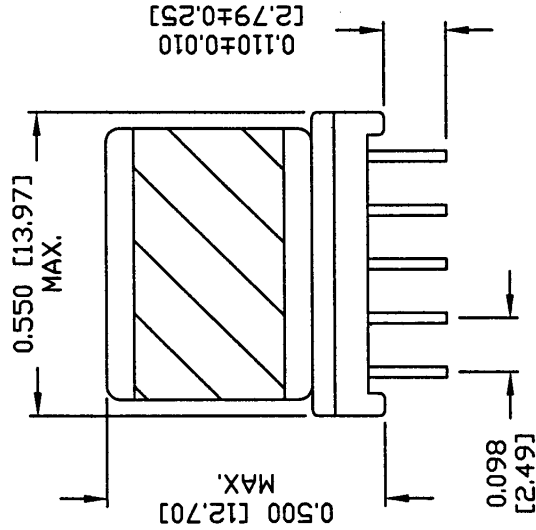

NOTES:

- STANDARD MARKING REFER TO DDC. HAND-WORK-04.
- PACKAGE CODE: "WBT002".

DRWN R. HARRIS/CANNY 01-08-02
 CHKD J. BERRY/Jan 01-08-02

TITLE
 MECHANICAL DRAWING

PART NO. / DRAWING NO.
 0560-6600-AQ
 FILE NAME
 05606600AQA.DWG

STANDARD DIM.		[] METRIC DIM. AS REFERENCE	
TOL. IN INCH	UNIT : INCH [mm]	REV. : A	
.X	N/A	SCALE : N/A	SIZE : A4
.XX			PAGE : 3
.XXX	±0.005		

