

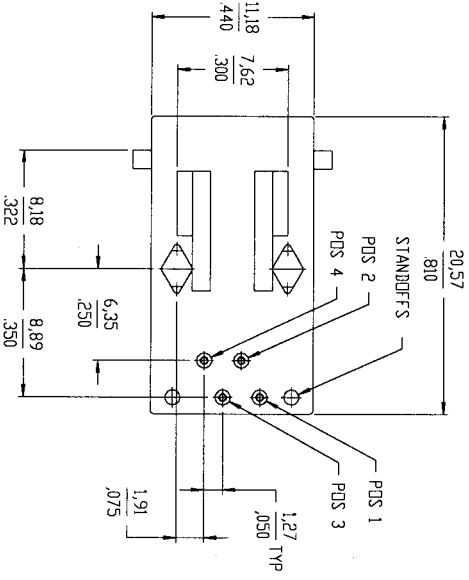



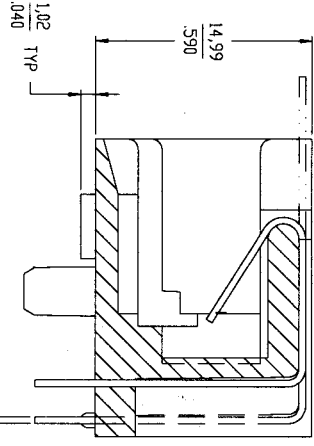

PRODUCT NUMBER
SEE TABLE

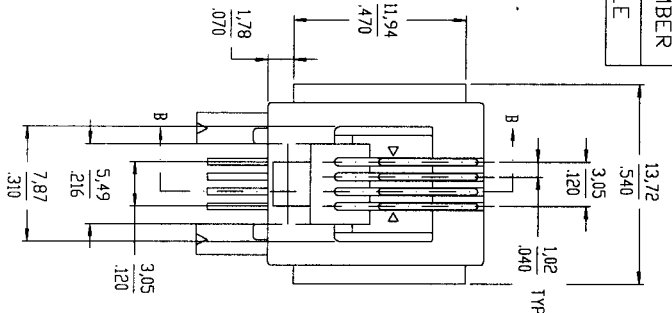

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCI		www.fciconnect.com	
litr	ecn no	dr	date	xx ±0.1/X±.3	xxx ±.005/xxx±.13	xxxx ±.0020/xxx±.051	0° ±2°	projection	title	product family	MODJACK	code	sheet
F	T10160	FP	05/08/91	linear					4 POS HORIZONTAL				
G	S20252	EC	08/09/92						PC.B. MOD JACK ASSY				
H	S30240	EC	21/07/93	angles									
J	S80281	BL	12/18/98	dr	M.HERNANDEZ	4/8/05							
K	S00022	BL	26/01/00	engr	M.BARRIOS	4/8/05							
L	M05-0067	MHT	4/8/05	chr	M.BARRIOS	4/8/05							
M	M05-0155	MHT	6/29/05	appd	M.BARRIOS	4/8/05							
Sheet	revision	M	M						3/1	A	68897		sheet
index	sheet	1	2										1 of 2

ACAD

PDM: Rev:M



STATUS:Released

Printed: Mar 09, 2007



PRODUCT NO. NOTE 1,3	POSITIONS LOADED	CONTACT PLATING NOTE 6	HOUSING COLOR
68897-001	ALL	.76um / 30u" GXT	BLACK
-002	ALL	.76um / 30u" Au	BLACK
-003	ALL	.76um / 30u" GXT	OFF-WHITE
-004	ALL	1.27um / 50u" Au	BLACK
-005	ALL	.15um / 6u" Au	BLACK

RECOMMENDED BOARD LAYOUT
VIEWED FROM TOP

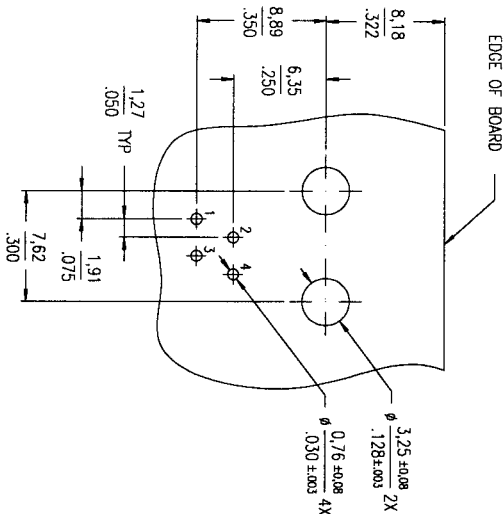

VIEW A-A

- NOTES :
- 1 WHEN PRODUCT CALLS FOR PACKAGING IN TRAY ORDER THE PRODUCT WITH PART NUMBER 68897-XXXX FOR PACKAGING IDENTIFICATION.
FOR PRODUCT NUMBER WITHOUT SUFFIX "T", THE PRODUCT WILL BE PACKED IN TUBE AS PER DUPONT STANDARD PACKAGING.
 - 2 GXT IS 0.76um / 30u" MIN GXT WITH Au FLASH OVER 1.27um / 50u" MIN Ni.
 - 3 ADD "L" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
 - 4 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AN OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
 - 5 THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
 - 6 PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code	ecn no	dr	date	tolerances unless otherwise specified	CUSTOMER COPY	FCI	www.fciconnect.com
M				.XX ±.01 / X±.3	projection	4 POS HORIZONTAL	
				.XXX ±.005 / XX±.13	angles	PC.B. MOD JACK ASSY	
				.XXX ±.0020 / XXX±.051	dr	M.HERNANDEZ 4/8/05	
				0° ±2°	engr	M.BARRIOS 4/8/05	
					chr	M.BARRIOS 4/8/05	
					appt	M.BARRIOS 4/8/05	
sheet	revision				scale	3/1	A
index	sheet						