
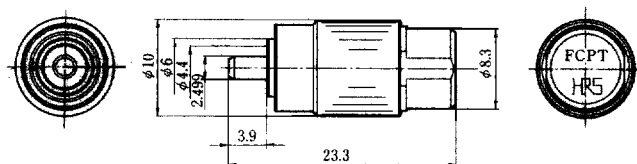



■ Terminators

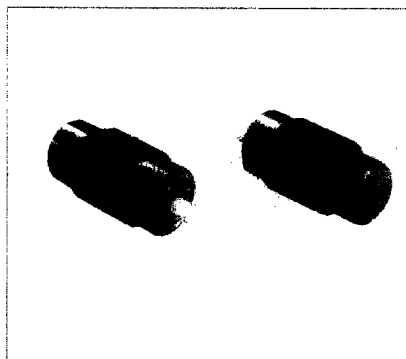

HRS No.	Product Number	Reflection Attenuation	Rated Input Power	Suitable Fiber
CL821-0006-3	HRFC-TM-P1	$\geq 45\text{dB}$	30mW	SM-9.5/125

※ See Page 101 for details about terminators.

■ Connectors with Cable Attached

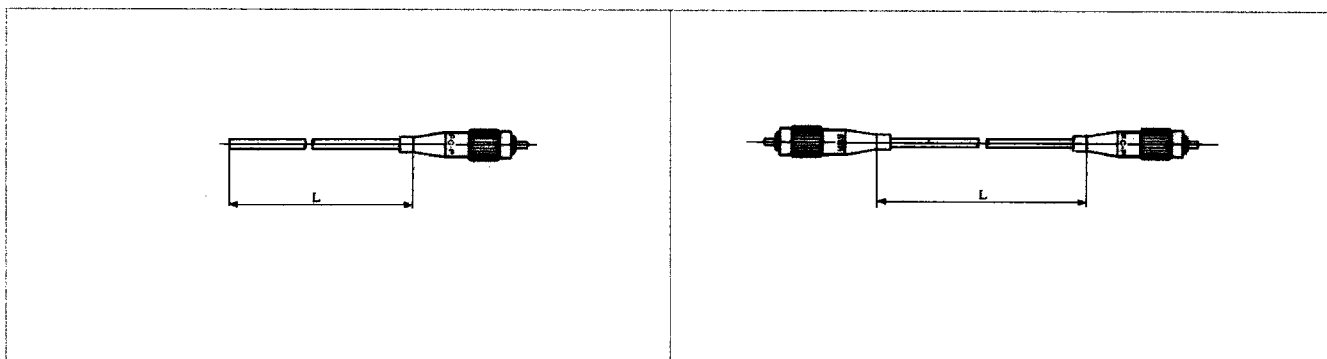

HRS No.	Product Number	Connector Mounting End	Optical Fiber	Type of Polishing	Cable Diameter	Ferrule Used
CL701-1027-6	HRFC-SP2-F3B-L	Both ends	GI-50/125	PC	$\phi 3$	Zirconia
CL701-1026-3	HRFC-SP2-F3A-L	Both ends	SM-9.5/125			
CL701-1028-9	HRFC-SP2-F3P-L	Both ends	GI-50/125			
CL701-1029-1	HRFC-SP2-F3Q-L	Both ends	SM-9.5/125			
—	HRFC-ASP1-F3A-L	One end	SM-9.5/125	AdPC	$\phi 3$	Zirconia
—	HRFC-ASP2-F3A-L	Both ends				
—	HRFC-ASP1-F3Q-L	One end				
—	HRFC-ASP2-F3Q-L	Both ends				