

**M/A-COM****AT10-0019**




PIN Diode based Variable Attenuator 50 - 1000 MHz



Features

- High Dynamic Range: 42dB Typical
- Flat Attenuation vs. Frequency
- High P1dB Compression
- Operates on a Single +5V Supply:
- SOW-16, Wide Body Package
- 50 Ohm Nominal Impedance

SOW-16

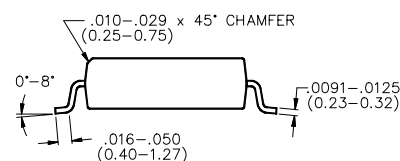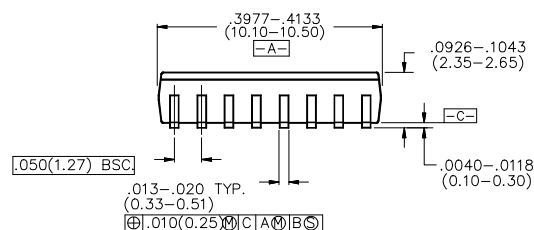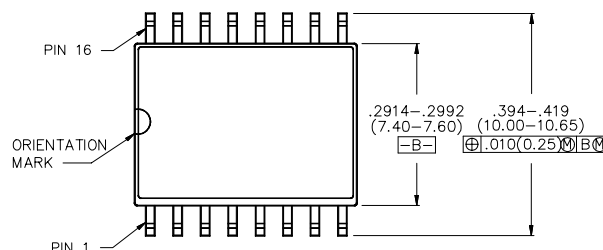

Package outline conforms to JEDEC standard MS-013AA.

Description

M/A-COM's AT10-0019 is a Voltage Controlled PIN diode based π attenuator packaged in a low cost, 16 lead wide body plastic SMT package. The PIN diode design makes this part well suited for applications where low distortion or high linear operating power levels are required. These attenuators are ideal for gain control in multi-channel digital communications systems.

Ordering Information

Part Number	Package
AT10-0019	Bulk Packaging
AT10-0019-TR	Tape and Reel ¹
AT10-0019-TB	Unit Mounted on Test Board

1. Check with the factory for available quantities and reel size.

Electrical Specifications ² $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typical	Max
Insertion Loss	Vcont.: +10 V	50 - 1000 MHz	dB	—	2.4	2.8
Dynamic Range	Vcont.: 0 V	50 - 1000 MHz	dB	33	42	—
Attenuation Flatness	Attenuation: 0 to 20 dB	50 - 1000 MHz	dB	—	1.0	1.5
	Attenuation: 20 to 30 dB	50 - 1000 MHz	dB	—	1.5	2.0
VSWR	Vcont.: 0 - 10V	50 - 1000 MHz	Ratio	—	1.7:1	2.1:1
Trise, Tfall	10%/90%, 90%/10%	—	μS	—	10	20
Ton, Toff	50% Cntl to 90%/10% RF	—	μS	—	15	25
Transients	In-band	—	mV	—	150	250
1 dB Compression	Vcont.: 0 - 10V	100 MHz	dBm	10	13	—
		500 MHz	dBm	17	20	—
		1000 MHz	dBm	21	24	—

2. Unit requires external .01 μF DC Blocks on RF lines.

Electrical Specifications² $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typical	Max
Input IP_3	$V_{cont.}$: 0 - 10V Two-tone inputs up to +10 dBm	100 MHz	dBm	24	27	—
		1000 MHz	dBm	34	37	—
V_{CC}	—	—	V	+4.75	+5.0	+5.25
I_{CC}	$V_{CC} = 5.25\text{ V}$	DC	mA	—	2	2.5
Control Current	—	DC	mA	—	2.7	3.5

Absolute Maximum Ratings³


Parameter	Absolute Maximum
Max. Input Power	
50 - 500 MHz	+24 dBm
500 - 1000 MHz	+30 dBm
Voltages	
V_{CC}	-1 V to +7.0 V
Control Voltage	-1 V to +15 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

3. Operation of this device above any one of these parameters may cause permanent damage.



Pin Configuration

Pin #	Function	Pin #	Function
1	GND	9	GND
2	RF in	10	V control
3	GND	11	GND
4	GND	12	GND
5	GND	13	GND
6	GND	14	GND
7	V Supply	15	RF out
8	GND	16	GND


Attenuation vs Frequency
@ Control Voltage = 0V

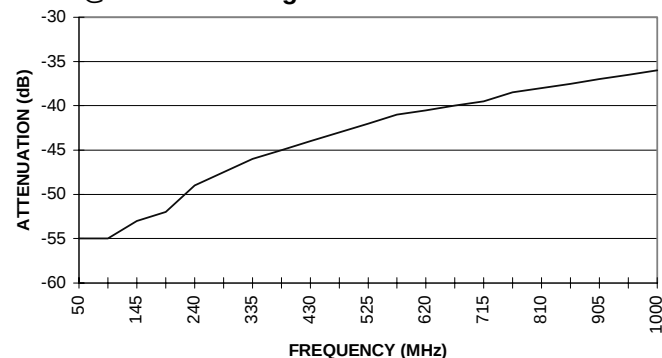

Attenuation vs Control Voltage
@ 500 MHz

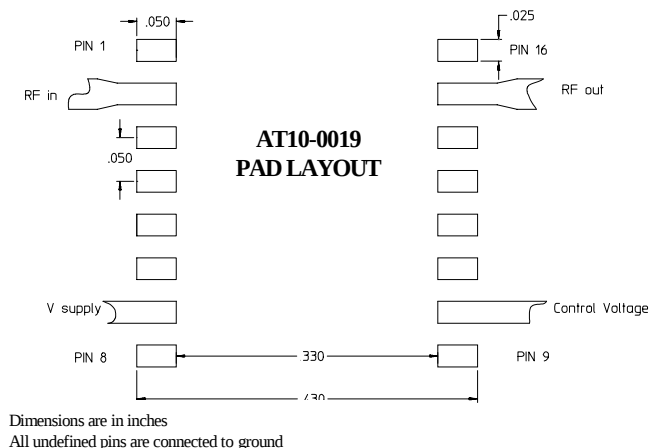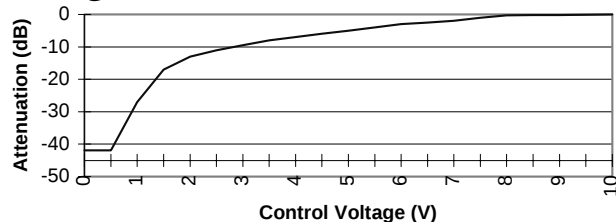

Insertion Loss vs Frequency
@ Control Voltage = 10V

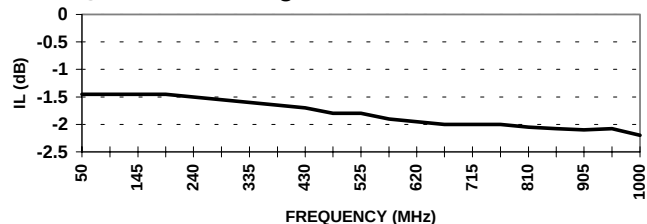

V3.00