


Square Type

1







LN424WPHAmber

Lighting Color	P_D (mW)	I_F (mA)	I_{FP} (mA)*	V_R (V)	T_{opr} (°C)	T_{stg} (°C)
Red	70	25	150	4	-25~+85	-30~+100
Green	90	30	150	4	-25~+85	-30~+100
Amber	90	30	150	4	-25~+85	-30~+100

★ Ifp の条件は, duty 10%, Pulse width 1 msec. The condition of Ifp is duty 10%, Pulse width 1 msec

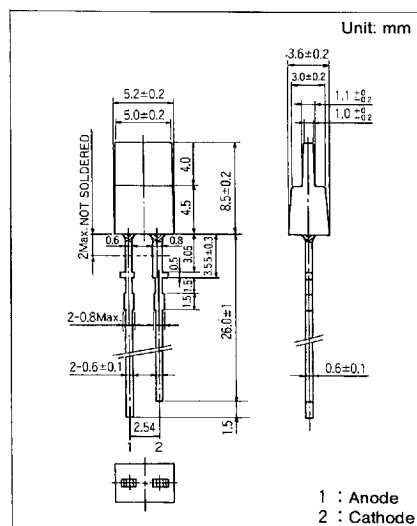

Type No.	Lighting Color	Lens Color	Illuminance			Spectral Power Distribution				I _F	I _R	
			Typ.	Min.	I _F	Typ.	Max.	Typ.	Δλ		Max.	V _R
LN224WPH	Red	White Diffused	0.4	0.15	15	2.2	2.8	700	100	20	5	4
LN324WPH	Green	White Diffused	4.0	1.70	20	2.2	2.8	565	30	20	10	4
LN424WPH	Amber	White Diffused	2.5	1.00	20	2.2	2.8	590	30	20	10	4
Unit	—	—	cd	cd	mA	V	V	nm	nm	mA	μA	V

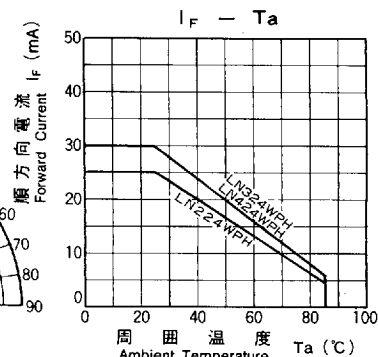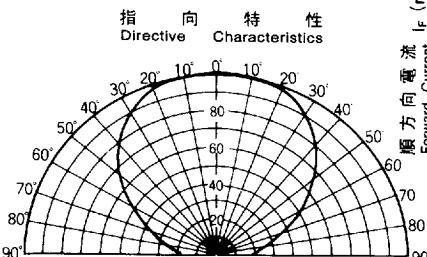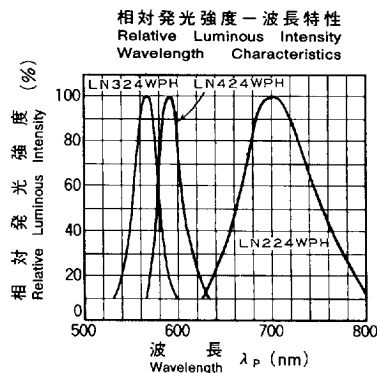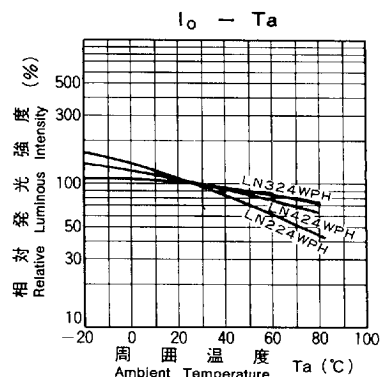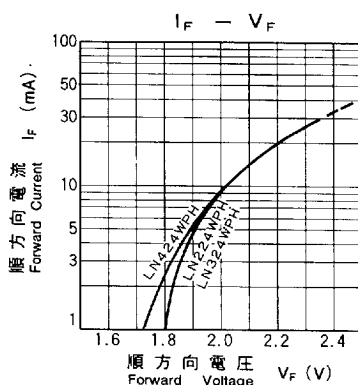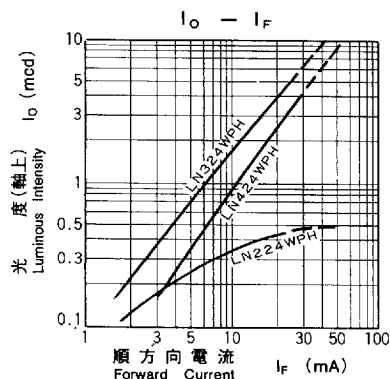

6932852 0014902 4T4

Panasonic