




A/D ELECTRONICS, INC.



ATCM-002

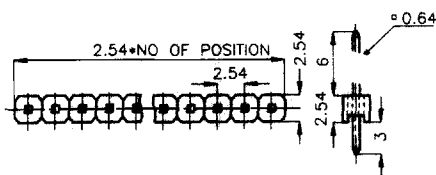


**PIN HEADER
(STRAIGHT, SINGLE ROW TYPE):
NO. OF CONTACT: 02-40***

Current Rate: 5A
Voltage: 1000V AC RMS for
one minute
Insulation Resistance: 1000 Megohms




ATCMD-002

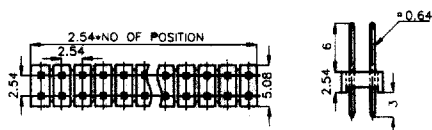


**PIN HEADER
(STRAIGHT, DOUBLE ROW TYPE):
NO. OF CONTACT: 04-80***

Current Rate: 5A
Voltage: 1000V AC RMS for
one minute
Insulation Resistance: 1000 Megohms




ATRM-002

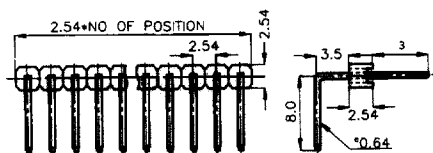


**PIN HEADER
(RIGHT ANGLE, SINGLE ROW TYPE):
NO. OF CONTACT: 02-40***

Current Rate: 5A
Voltage: 1000V AC RMS for
one minute
Insulation Resistance: 1000 Megohms



ATRMD-002

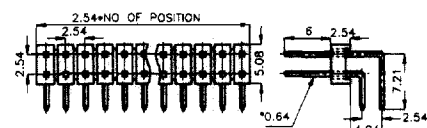

**PIN HEADER
(RIGHT ANGLE, DOUBLE ROW TYPE):
NO. OF CONTACT: 04-80***

Current Rate: 5A
Voltage: 1000V AC RMS for
one minute
Insulation Resistance: 1000 Megohms

* PLEASE ADD TWO DIGIT SUFFIX TO PART # TO INDICATE NUMBER OF CONTACTS DESIRED