

40VA & 50VA Quick Connect Transformers

4000 Series - Class II U.L. 1585

Inherently Energy Limited (No secondary fusing required)

- **Type "BB" Same Side Termination** - features quick connect terminals with line and load terminations on the same side of the transformer.
- **Type "AE" Laydown Termination** - features quick connect terminals with line and load terminations on the top of the transformer.
- **Type "AB" Opposite Side Termination** - features quick connect terminals with line and load terminations on opposite sides of the transformer.

PART NUMBER	VA RATING	PRIMARY VOLTS	SEC. VOLTS	FREQUENCY HERTZ	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	BOX QUANTITY	APPROX. WEIGHT
4000-01E07AE999**	40	120	24	50/60	3.125" 7.94cm	2.625" 6.67cm	2.188" 5.56cm	2.125" 5.40cm	.875" 2.22cm	25	1.48 lbs .67 kg
-01E07BB999**		120	24								
-01E07BB*		120	24								
-02E07BB*		240	24								
-03E07BB*		277	24								
-04E07BB*		480	24								
-09E07AE999**		208/240	24								
-09E07BB*		208/240	24								
-51E07BB*		380/415	24								
-78E07BB*		575	24								
4000-01V18BB*	40	120	24	50/60	2.812" 7.14cm	2.25" 5.72cm	1.88" 4.78cm	2.25" 5.72cm	1.25" 3.18cm	25	1.48 lbs .67 kg
-02V18BB*		240	24								
-03V18BB*		277	24								
-04V18BB*		480	24								
-09V18BB*		208/240	24								
-51V18BB*		380/415	24								
-78V18BB*		575	24								
4000-01V18AB*	40	120	24	50/60	2.812" 7.14cm	2.25" 5.72cm	1.88" 4.78cm	2.25" 5.72cm	1.25" 3.18cm	25	1.50 lbs .68 kg
-02V18AB*		240	24								
-03V18AB*		277	24								
-04V18AB*		480	24								
-09V18AB*		208/240	24								
-51V18AB*		380/415	24								
4000-01AW18BB*	50	120	24	50/60	3.125" 7.94cm	2.625" 6.67cm	2.188" 5.56cm	2.56" 6.50cm	1.25" 3.18cm	10	2.20 lbs 1.00 kg
-02AW18BB*		240	24								
-03AW18BB*		277	24								
-04AW18BB*		480	24								
-09AW18BB*		208/240	24								
-51AW18BB*		380/415	24								
-78AW18BB*		575	24								

To specify Laydown Termination, change "BB" in part number to "AE".

* A three digit customer ID suffix will be assigned by the factory.

Consult factory for availability of other voltage combinations.

Standard male quick connect terminals are .250 x .032.

Other quick connect sizes available .187 x .032 & .187 x .020.

**** Part numbers with the "999" suffix are in stock and available for immediate shipment.**

AGENCY APPROVALS: U.L./C.U.L. File E87824


Guide No. XOKV2

C.S.A. File LR56266


Insulation System = 130°C Class B

40VA & 50VA Quick Connect Transformers


4000 Series - Class II U.L. 1585

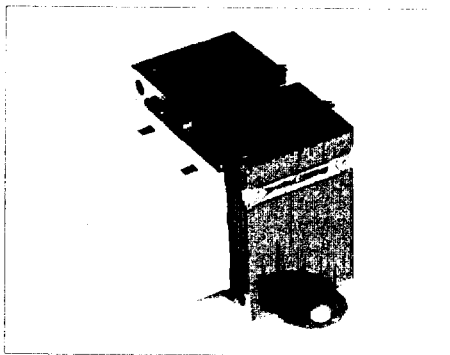

4000-09V18BB*



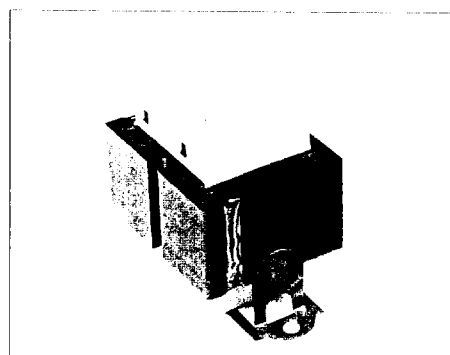


4000-09V18AE*



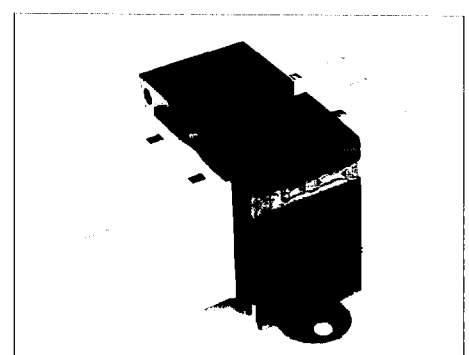


4000-09V18AB*

Type "BB" Same Side Termination

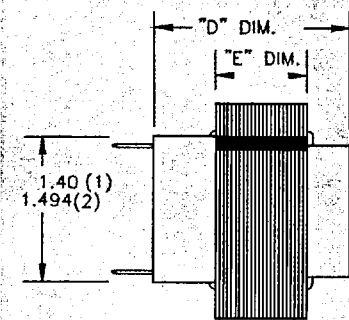
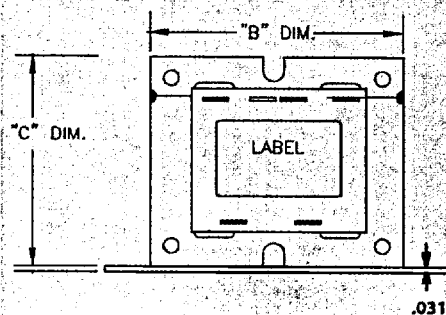
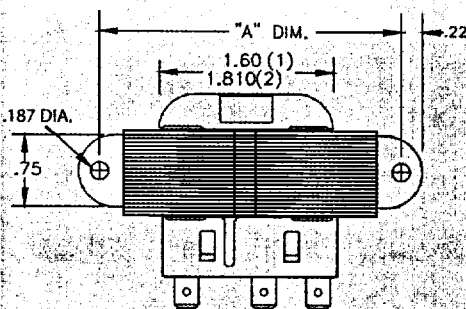


Type "AE" Laydown Termination

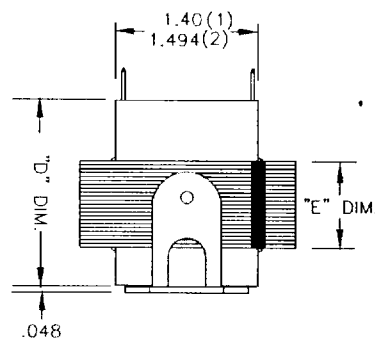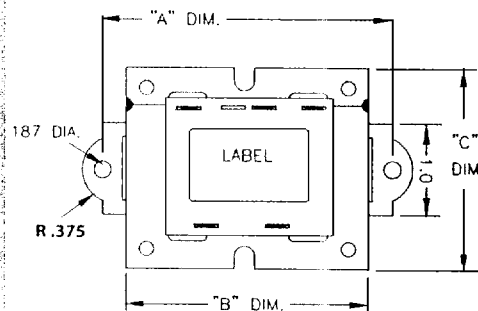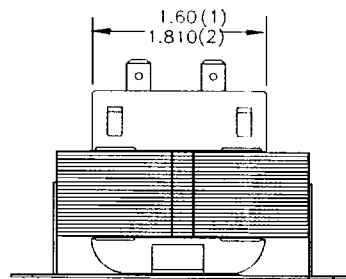

- (1) Applies to "V18" models.
(2) Applies to "E07" & "AW18" models.

Type "AB" Opposite Side Termination

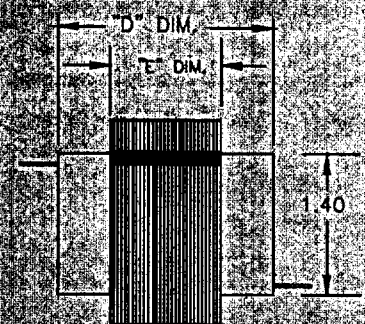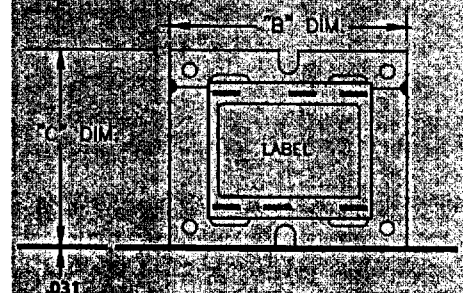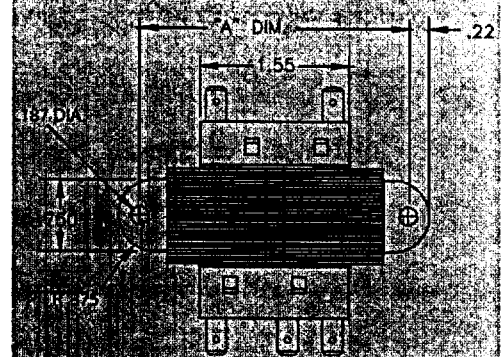

Dimensions shown are in inches and apply to transformers listed on page 32.



Products Unlimited Corp.
Sales & Technical Support
815-626-0300