




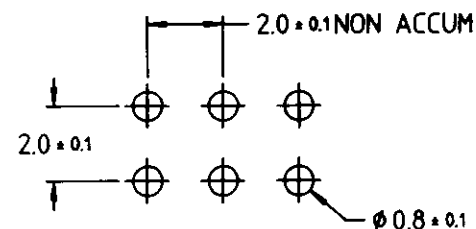

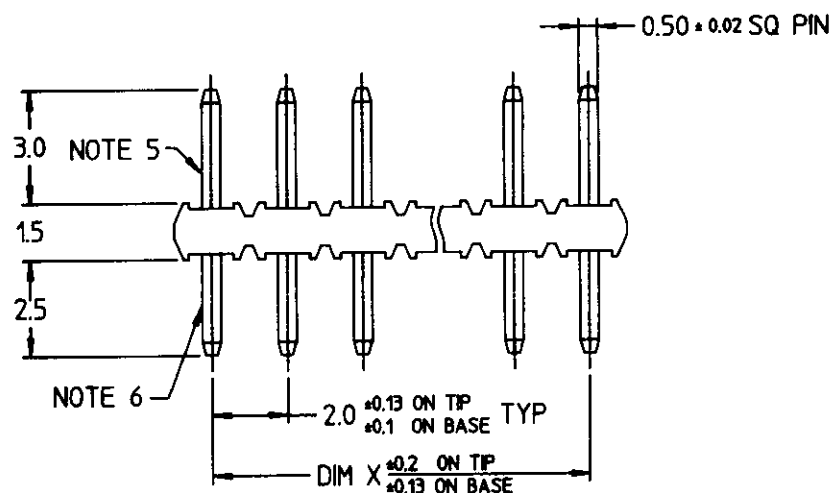



PRODUCT NO  
SEE TABLE

REV	DESCRIPTION	REV'D BY	DATE
A	RLSD ECR 540248	BS LOW	11OCT94
B	ECR 570077	BS LOW	27MAR97

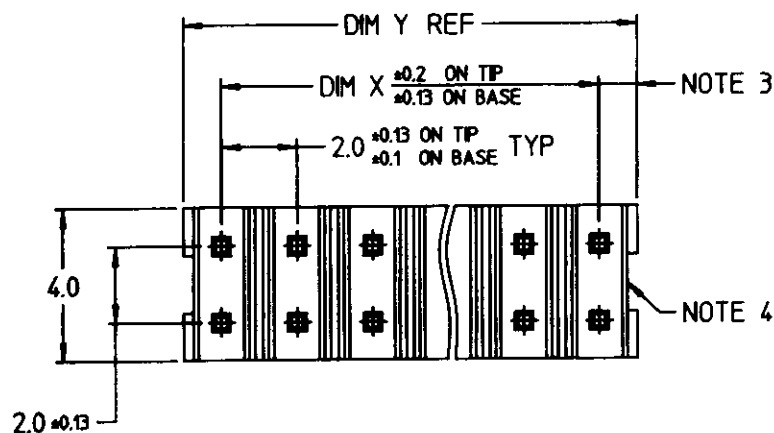

RECOMMENDED MOUNTING HOLE LAYOUT

CUSTOMER COPY

GEN. TOLERANCES		DO NOT SCALE DWG.				
REFER TO NOTE 2						
		 				
	NAME	DATE	DESCRIPTION  MINTEK II  STR HEADER (SnPb S.T)			
DRAWN	MLCHWA	11OCT94				
CHECKED		11 OCT 94				
APPROVED		11 OCT 94				
PRODUCT NO.			94263			
SCALE			SMT 1 OF 2			

PRODUCT NO	POS	DIM X	DIM Y
94263-X04	2X2	2	4
X06	2X3	4	6
X08	2X4	6	8
X10	2X5	8	10
X12	2X6	10	12
X14	2X7	12	14
X16	2X8	14	16
X18	2X9	16	18
X20	2X10	18	20
X22	2X11	20	22
X24	2X12	22	24
X26	2X13	24	26
X28	2X14	26	28
X30	2X15	28	30
X32	2X16	30	32
X34	2X17	32	34
<del>X36</del>	<del>2X18</del>	<del>34</del>	36
X38	2X19	36	38
X40	2X20	38	40
X42	2X21	40	42
X44	2X22	42	44
X46	2X23	44	46
X48	2X24	46	48
X50	2X25	48	50

#### NOTES

##### 1 MATERIAL

BODY : HIGH TEMPERATURE PLASTIC UL 94V-0 BLACK

PIN : COPPER ALLOY

##### 2 TOLERANCE UNLESS OTHERWISE NOTED $\pm 0,25$

3 DIM 1,0  $\pm 0,15$  APPLIES TO MOLDED SIDE(S) ONLY  
IF SIDE(S) ARE BROKEN DIM 1,5 MAX APPLIES

4 RECESS APPLIES TO MOLDED SIDE(S) ONLY

##### 5 PLATING ON MATING LENGTH:

-3XX --- 0.38um Au OVER 1.27um MIN NICKEL UNDERPLATE.






-5XX --- 0.38um PdNi WITH Au FLASH OVER 1.27um MIN NICKEL UNDERPLATE.

-6XX --- 0.76um PdNi WITH Au FLASH OVER 1.27um MIN NICKEL UNDERPLATE.

##### 6 SOLDER TAIL PLATING

3.81um MIN TIN/LEAD PLATING OVER 1.27um MIN NICKEL UNDERPLATE.

**CUSTOMER COPY**

GEN. TOLERANCES		DO NOT SCALE DWG. MM		
REFER TO NOTE 2		 		
DRAWN	NAME MLCHWA	DATE 11OCT94	DESCRIPTION MINTEK II STR HEADER (SnPb S.T)	
CHECKED		11OCT94	PRODUCT NO. 94263	
APPROVED		11OCT94	SCALE	SHT 2 OF 2