


C702A Smart Card Connectors Standard Style Push-Push




Description	Contact position	Part No.
Push-Push	ISO	C702 10M008 015 2

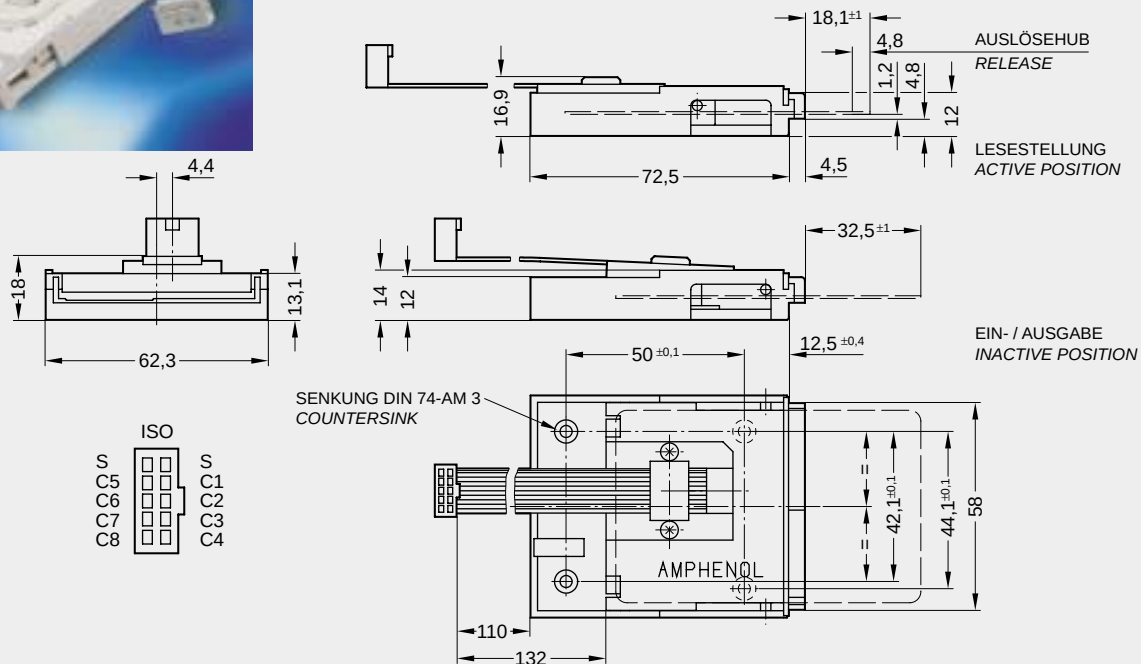

C702A Smart Card Connectors Standard Style PUSHMATIC®



Description	Solenoid voltage	Contact position	Additional information	Part No.
PUSHMATIC®	5 V	ISO Standard		C702 10M008 701 2
	12 V	ISO Standard		C702 10M008 700 2
	24 V	ISO Standard		C702 10M008 702 2
	5 V	ISO + AFNOR	Contacts in series	C702 10M008 703 2
	12 V	ISO + AFNOR	Contacts in series	C702 10M008 704 2
	24 V	ISO + AFNOR	Contacts in series	C702 10M008 705 2
	5 V	ISO + AFNOR	Contacts in parallel	C702 10M008 706 2
	12 V	ISO + AFNOR	Contacts in parallel	C702 10M008 707 2
	24 V	ISO + AFNOR	Contacts in parallel	C702 10M008 708 2

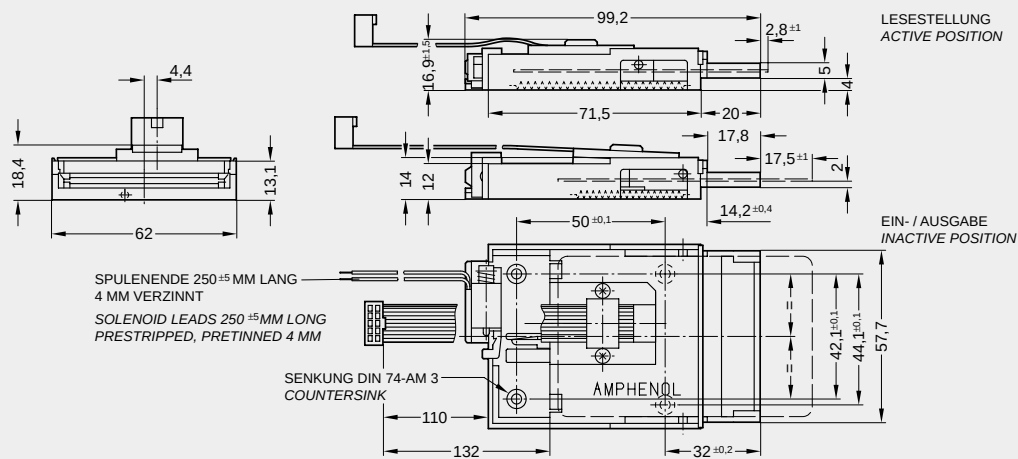

Belegung Steckverbinder / Connector termination		AFNOR	ISO + AFNOR
ISO	ISO + AFNOR Kontakte in Reihe / Contacts in series		Kontakte parallel / Contacts in parallel
			ISO AFNOR nc = frei not connected