


# DJSL Series Side Entry PCB Mount Mini Din Socket



UNIT :  $\frac{\text{mm}}{\text{inch}}$

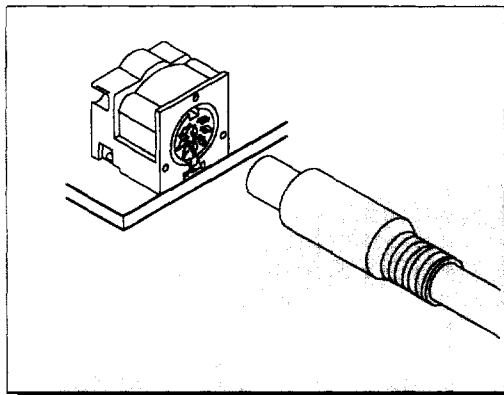

## Features:

- \* Available in 3 through 8 circuits
- \* With retaining clip ground strap
- \* Options with or without metal shell

## Specifications:

- \* Voltage rating: 100V AC,DC
- \* Current rating: 2A AC,DC
- \* Contact resistance: 20mΩ max.
- \* Dielectric withstanding: 500V AC/minute
- \* Insulation resistance: 50MΩ min.
- \* Temperature range: -25°C ~ +105°C

## Material/Finish


- \* Insulator: Glass filled polyester UL94V-0
- \* Color Black
- \* Earth terminal material: Phosphor bronze
- \* Earth terminal plating: Tin
- \* Shielded terminal material: Phosphor bronze
- \* Shielded terminal plating: Tin
- \* Contact material: Brass
- \* Contact plating: Tin

## Standards

Recognized No. E82349

## Ordering Information:

| No. of Contact | Part No. With Shell | Part No. Without Shell |
|----------------|---------------------|------------------------|
| 3              | DJSL-03TC00         | DJSL-03T000            |
| 4              | DJSL-04TC00         | DJSL-04T000            |
| 5              | DJSL-05TC00         | DJSL-05T000            |
| 6              | DJSL-06TC00         | DJSL-06T000            |
| 7              | DJSL-07TC00         | DJSL-07T000            |
| 8              | DJSL-08TC00         | DJSL-08T000            |

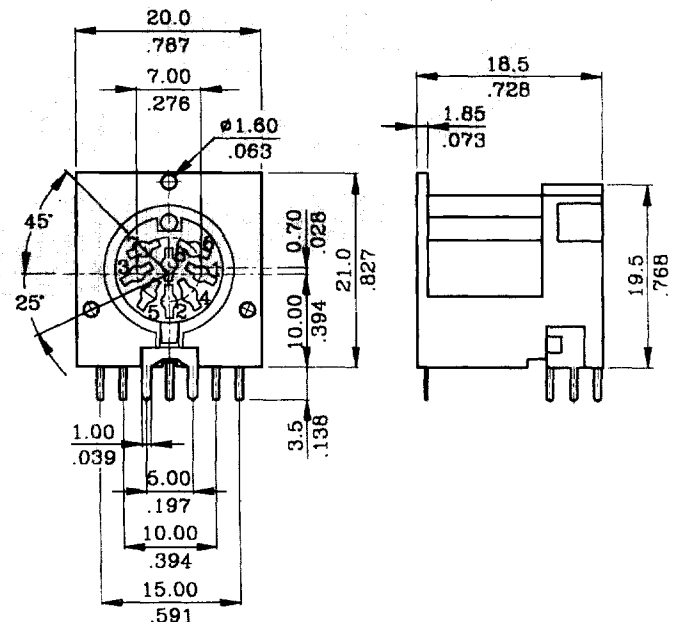

| Contact  | 3 | 4 | 5 | 6 | 7 | 8 |
|----------|---|---|---|---|---|---|
| Psoition |   |   |   |   |   |   |