

| REVISION RECORD | | | | |
|-----------------|-----|-------------|-------|------|
| REV | ECO | DESCRIPTION | DRFT | CHKD |
| △ | | 設計修正 | BOTON | |
| △ | | 圖面修正 | PSP | |
| △ | | 圖面修正 | LFE | |

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS MIN.
- CURRENT RATING: 1.5 AMPS MIN.
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGAOHMS MIN @ 500VDC.
- DIELECTRIC STRENGTH: 1000VAC RMS 60HZ, 1MIN.

MECHANICAL:

- HOUSING MATERIAL: UL 94V-0 BLACK NYLON RATED TO 250°.
- CONTACT MATERIAL: PHOSPHOR BRONZE
- PLANTING: GOLD PKANTING OVER NICKEL
- OPERATING LIFE: 750 CYCLES MIN.
- PCB THICKNESS: 0.062"
- PCB RETENTION PRE-SOLDER: 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10LBS MIN.

ENVIRONMENTAL:



- STORAGE: -40°C TO +85°C.
- OPERATION: 0°C TO 70°C

PART

NUMBER.E556X-50A62X

4-4C
6-8C

1-3u"
2-6u"
3-15u"
4-30u"
5-50u"

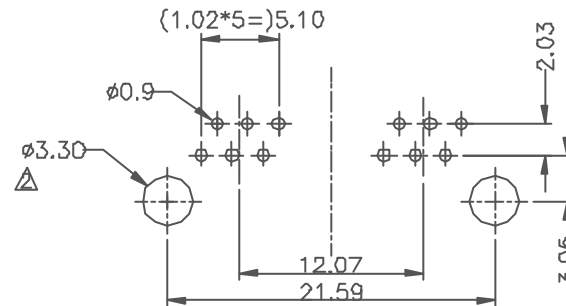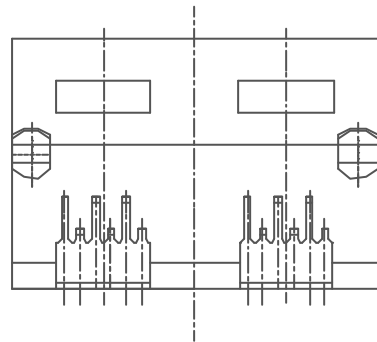

PCB LAYOUT (TOP VIEW)

| | | | |
|---|--|--|--|
| DETACHED LISTS TOLERANCES EXCEPT AS NOTED: .04 ± .02 .00 ± 0.15 .00 ± 0.075 ANGLES ± .05 THIRD ANGLE PROJECTION | DPTD VINCENT DATE 12/06/96 CHKD SAMMY DATE 3/28/12 MFD DATE APPV SHY DATE 5/28/02 | FULL RISE ELECTRONIC CO., LTD TITLE S2 PCB JACK 6P*2 | |
| | MATERIAL: QTY: FINISH: SCALE: 3:1 | | |
| | SIZE A3 REV 5/28/12 3 | SHEET OF | |
| | DO NOT SCALE DRAWING | SHEET OF | |