

DDR Connector

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.75Lbs (0.34kg) min.
Durability: 25 Cycles
Vibration: Pass MIL-STD-1344A, Method 2005 Condition I

Electrical


Voltage Rating: 250V
Current Rating: 1.0A max.
Contact Resistance: 30mW max.
Dielectric Withstanding Voltage: 1000V
Insulation Resistance: 1000MW min.

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Ejector Lever: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Operating Temperature: -55 to +105



DRAWING

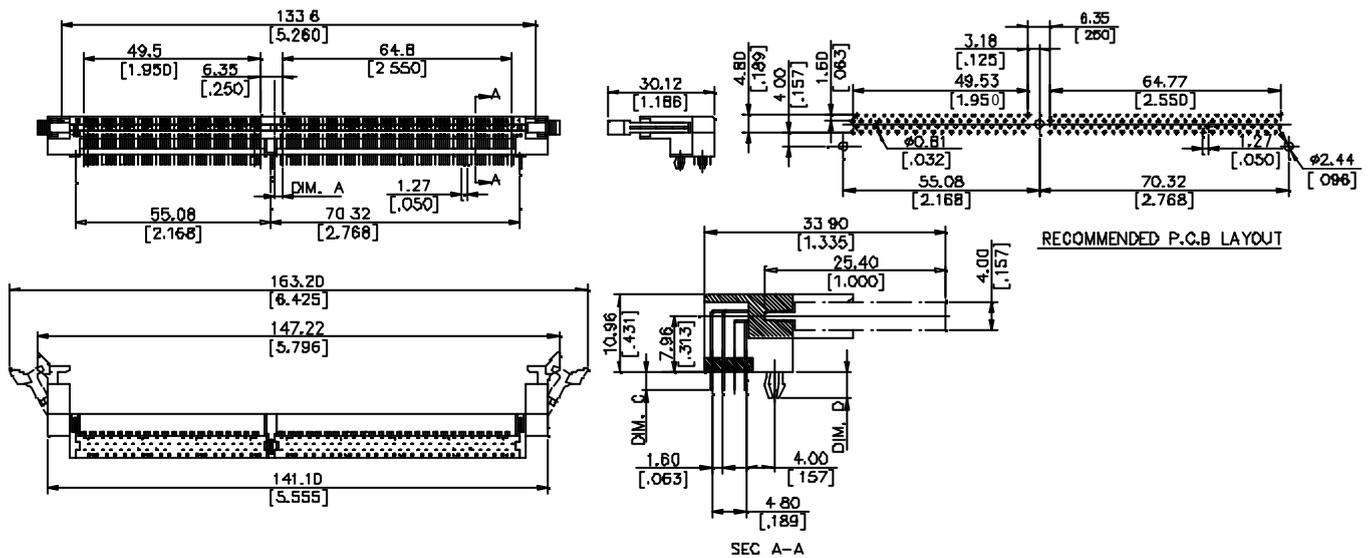

ORDERING INFORMATION

PRODUCT NO.: A U 0 * * * * - * * *

Memory Socket with Contact Pitch of .050"

Right Angle

No. of Pos. 92=184 Pos.

Tail Length 0=3.15 [1.24]

Extension Code

Contact Area Plating

- 1=Gold Flash
- 2=20u" Gold
- 3=30u" Gold
- 6=10u" Gold
- 7=15u" Gold
- F=Gold Flash (Lead Free)
- J=10u" Gold (Lead Free)
- V=15u" Gold (Lead Free)
- X=20u" Gold (Lead Free)
- H=30u" Gold (Lead Free)

AU0923*-M1	2.5 V	2.175 [086]	4.19 [.165]	4.78 [.188]
AU0922*-M1	2.5 V	2.175 [086]	3.58 [.140]	4.57 [.180]
AU0921*-M1	2.5 V	2.175 [086]	2.87 [.105]	3.78 [.180]
F/N	VOLTAGE MARKING	DIM. A	DIM. C	DIM. D