

SURFACE MOUNT POWER INDUCTORS


PIC SERIES

- High current ratings in small size
- Industry's widest range of sizes
- Low cost!
- 0.68 μ H to 2200 μ H



OPTIONS

- Option ER¹: Military Screening
- Option 63: polarity identification
- Numerous design modifications are available including high frequency testing, shielded, increased current and temperature ratings, non-standard inductance values, custom marking, etc.

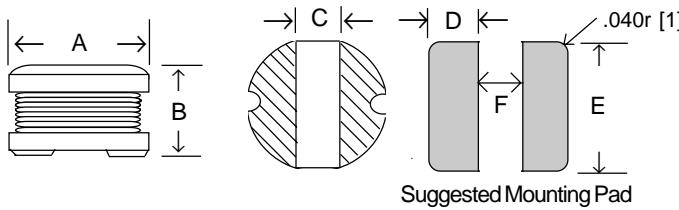

Series PIC inductors were developed to provide high current capability in an economical surface mount design. The cylindrical geometry enables a wide range of values with excellent high frequency performance. Construction is wirewound and utilizes a ferrite core. Units are marked with inductance value. Terminations are solder coated to ensure optimum solderability and shelf life. Applications include noise filtering, DC/DC converters, telecom, power supplies, switching regulators, etc. Custom models avail.

Type	A (Max)	B (Max)	C (Typ)	D	E	F
PIC1	.189 [4.8]	.138 [3.5]	.060 [1.5]	.070 [1.75]	.177 [4.5]	.060 [1.5]
PIC2	.240 [6.1]	.193 [4.9]	.070 [1.8]	.085 [2.15]	.225 [5.7]	.067 [1.7]
PIC3	.319 [8.1]	.157 [4.0]	.083 [2.1]	.120 [3.0]	.307 [7.8]	.080 [2]
PIC4	.319 [8.1]	.216 [5.5]	.083 [2.1]	.120 [3.0]	.307 [7.8]	.080 [2]
PIC5	.405 [10.3]	.177 [4.5]	.083 [2.1]	.150 [3.75]	.394 [10]	.100 [2.5]
PIC6	.409 [10.4]	.228 [5.8]	.083 [2.1]	.150 [3.75]	.394 [10]	.100 [2.5]
PIC7 ²	.433 [11]	.295 [7.5]	.083 [2.1]	.160 [4.0]	.420 [10.7]	.110 [2.8]

Induc. Value (μ H) & Std. Tol.	PIC1 Current Rating/ Max. DC Resis	PIC2 Current Rating/ Max. DC Resis	PIC3 Current Rating/ Max. DC Resis	PIC4 Current Rating/ Max. DC Resis	PIC5 Current Rating/ Max. DC Resis	PIC6 Current Rating/ Max. DC Resis	PIC7 ² Current Rating/ Max. DC Resis
.68 ±20%	2.60A/.045 Ω	Consult RCD					
1.0 ±20%	2.56A/.049 Ω	"	"	"	"	"	"
1.4 ±20%	2.52A/.057 Ω	"	"	"	"	"	"
1.8 ±20%	1.95A/.064 Ω	"	"	"	"	"	"
2.2 ±20%	1.75A/.072 Ω	2.20A/.054 Ω	"	"	"	"	"
2.7 ±20%	1.58A/.079 Ω	2.10A/.057 Ω	"	"	"	"	"
3.3 ±20%	1.44A/.087 Ω	2.00A/.060 Ω	"	"	"	"	"
3.9 ±20%	1.33A/.094 Ω	1.90A/.065 Ω	"	"	"	"	"
4.7 ±20%	1.15A/.109 Ω	1.80A/.070 Ω	1.78A/.054 Ω	"	"	"	"
5.6 ±20%	1.10A/.126 Ω	1.70A/.075 Ω	1.68A/.060 Ω	"	"	"	"
6.8 ±20%	1.08A/.132 Ω	1.60A/.080 Ω	1.58A/.067 Ω	2.7A/.050 Ω	"	"	"
8.2 ±20%	1.05A/.147 Ω	1.50A/.090 Ω	1.48A/.074 Ω	2.5A/.062 Ω	2.60A/0.04 Ω	"	"
10 ±20%	1.04A/.182 Ω	1.45A/.102 Ω	1.44A/.080 Ω	2.3A/.070 Ω	2.38A/.050 Ω	2.60A/.06 Ω	3.50A/.06 Ω
12 ±20%	0.97A/.210 Ω	1.40A/.12 Ω	1.39A/.09 Ω	2.0A/.08 Ω	2.13A/.06 Ω	2.45A/.07 Ω	3.40A/.07 Ω
15 ±20%	0.85A/.235 Ω	1.30A/.14 Ω	1.24A/.10 Ω	1.8A/.09 Ω	1.87A/.07 Ω	2.27A/.08 Ω	3.10A/.08 Ω
18 ±20%	0.74A/.338 Ω	1.25A/.15 Ω	1.12A/.11 Ω	1.6A/.10 Ω	1.73A/.08 Ω	2.15A/.09 Ω	3.00A/.09 Ω
22 ±20%	0.68A/.378 Ω	1.11A/.19 Ω	1.07A/.13 Ω	1.5A/.11 Ω	1.60A/.09 Ω	1.95A/.10 Ω	2.60A/.10 Ω
27 ±20%	0.62A/.52 Ω	1.00A/.22 Ω	0.94A/.15 Ω	1.3A/.12 Ω	1.44A/.10 Ω	1.76A/.11 Ω	2.40A/.11 Ω
33 ±10%	0.56A/.54 Ω	0.88A/.25 Ω	0.85A/.17 Ω	1.2A/.14 Ω	1.26A/.12 Ω	1.50A/.12 Ω	2.30A/.12 Ω
39 ±10%	0.52A/.59 Ω	0.80A/.32 Ω	0.74A/.22 Ω	1.1A/.16 Ω	1.20A/.15 Ω	1.37A/.14 Ω	2.10A/.14 Ω
47 ±10%	0.44A/.84 Ω	0.72A/.37 Ω	0.68A/.25 Ω	1.0A/.20 Ω	1.10A/.17 Ω	1.28A/.17 Ω	1.95A/.17 Ω
56 ±10%	0.42A/.94 Ω	0.68A/.42 Ω	0.64A/.28 Ω	.94A/.24 Ω	1.00A/.20 Ω	1.17A/.19 Ω	1.85A/.19 Ω
68 ±10%	0.37A/1.12 Ω	0.62A/.52 Ω	0.59A/.33 Ω	.85A/.28 Ω	.91A/.22 Ω	1.11A/.22 Ω	1.65A/.22 Ω
82 ±10%	0.33A/1.37 Ω	0.58A/.60 Ω	0.54A/.41 Ω	.78A/.37 Ω	.85A/.25 Ω	1.00A/.25 Ω	1.50A/.25 Ω
100 ±10%	0.30A/1.66 Ω	0.52A/.70 Ω	0.51A/.48 Ω	.72A/.45 Ω	.74A/.34 Ω	.97A/.35 Ω	1.40A/.35 Ω
120 ±10%	Consult RCD	0.49A/.93 Ω	0.48A/.54 Ω	.66A/.48 Ω	.69A/.40 Ω	.89A/.40 Ω	1.30A/.40 Ω
150 ±10%	"	0.41A/1.1 Ω	0.40A/.75 Ω	.58A/.68 Ω	.61A/.54 Ω	.78A/.47 Ω	1.20A/.47 Ω
180 ±10%	"	0.38A/1.37 Ω	0.36A/1.02 Ω	.51A/.77 Ω	.56A/.62 Ω	.72A/.63 Ω	1.00A/.63 Ω
220 ±10%	"	0.35A/1.57 Ω	0.31A/1.20 Ω	.49A/.96 Ω	.53A/.72 Ω	.66A/.73 Ω	.95A/.73 Ω
270 ±10%	"	0.31A/1.87 Ω	0.29A/1.31 Ω	.42A/1.11 Ω	.45A/.95 Ω	.57A/.97 Ω	.90A/.97 Ω
330 ±10%	"	0.28A/2.30 Ω	0.28A/1.50 Ω	.40A/1.26 Ω	.42A/1.10 Ω	.52A/1.16 Ω	.80A/1.16 Ω
390 ±10%	"	0.23A/3.40 Ω	0.22A/2.47 Ω	.36A/1.77 Ω	.38A/1.24 Ω	.48A/1.30 Ω	.75A/1.30 Ω
470 ±10%	"	0.20A/4.50 Ω	0.20A/3.00 Ω	.34A/1.96 Ω	.35A/1.53 Ω	.42A/1.48 Ω	.65A/1.48 Ω
560 ±10%	Consult RCD	"	0.30A/2.22 Ω	.32A/1.90 Ω	.33A/1.90 Ω	.33A/1.90 Ω	.60A/1.90 Ω
680 ±10%	"	"	"	.26A/2.96 Ω Consult RCD	.25A/3.12 Ω .22A/4.00 Ω	.28A/2.25 Ω .24A/2.55 Ω	.50A/2.45 Ω .48A/2.55 Ω
820 ±10%	"	"	"	"	.18A/5.96 Ω Consult RCD	.20A/3.75 Ω " Consult RCD	.46A/3.00 Ω .35A/3.50 Ω
1000 ±10%	"	"	"	"	"	"	.32A/4.18 Ω
1200 ±10%	"	"	"	"	"	"	.28A/5.46 Ω
1500 ±10%	"	"	"	"	"	"	
2200 ±10%	"	"	"	"	"	"	

¹ Option ER Military Screening: per Mil-C-15305 (Thermal Shock -25/+85°C, DCR, Inductance, Vis./Mechanical Insp) ² Information on PIC7 is preliminary

SPECIFICATIONS

- Standard Tol.: $\leq 27\mu$ H ±20% (10% avail), $> 27\mu$ H ±10% (5% avail)
- Inductance Test Frequency: 1KHz (high freq. testing avail.)
- Temperature Range: -40 to +85°C
- Temperature Rise: 20°C typical at rated current
- Resistance to Soldering Heat: 260°C for 10 Sec
- Rated Current lowers inductance approximately 10%

P/N DESIGNATION:

PIC1 - 1R8 - M T

RCD Type

Option Codes: ER, 63, etc.
(leave blank if standard)

Inductance (uH): 2 signif. digits & multiplier
(R68= .68uH, 1R0 = 1uH, 100=10uH, 101=100uH)

Tolerance Code: M=20%, W=15% K=10%, J=5%

Packaging: T= Tape & Reel

RCD Components Inc., 520 E. Industrial Park Dr., Manchester, NH, USA 03109

Tel: (603) 669-0054 Fax:(603) 669-5455 E-mail: sales@rcdcomponents.com www.rcdcomponents.com

FA012B specifications subject to change without notice