


**PCB CONNECTORS - STRAIGHT SOLDER TAIL**

**Series** PCB Connectors - Straight solder tail  
**350** Single row  
 2.54/5.08 mm, Straight solder tail, Pin 0.47mm

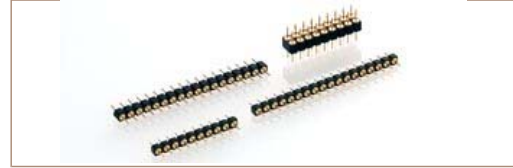

Pin connectors, solder tail.

**Technical specs.:**

**Insulator:** Black glass filled polyester  
 PCT-GF30-FR  
**Flammability:** UL 94V-O  
**Contact:** Brass CuZn36Pb3 (C36000)  
**Connecting pin Ø:** 0.47 mm  
**Mechanical life:** Min. 500 cycles  
**Rated current:** 3 A  
**Dielectric strength:** Min. 1000 V RMS

**Ordering information RoHS-compliant parts**

PP Plating code	Termination	Connecting pin
10	Gold 0.25 µm	Gold 0.25 µm
80	Tin	Tin
V3*	Tin	Gold 0.75 µm

\*only for 350...00-006101 series

**NN number of poles.** Replace NN with the requested number of poles, e.g. 450-10-2NN-00-006101 for a double row version with 16 pins becomes 450-10-216-00-006101.

**General technical specs. ...**

**350-PP-1NN-00-001101**

Straight pin connector, height 4 mm: solder tail, single row.

**Pin Ø 0.47 mm**

Availability from: 2 to 64 contacts.  
 Standard number of contacts 64.