


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₂	REVISED	10/18/87	
B	PER EC 0U20-0116-01-03	16NOV01	C. Huang 16NOV01

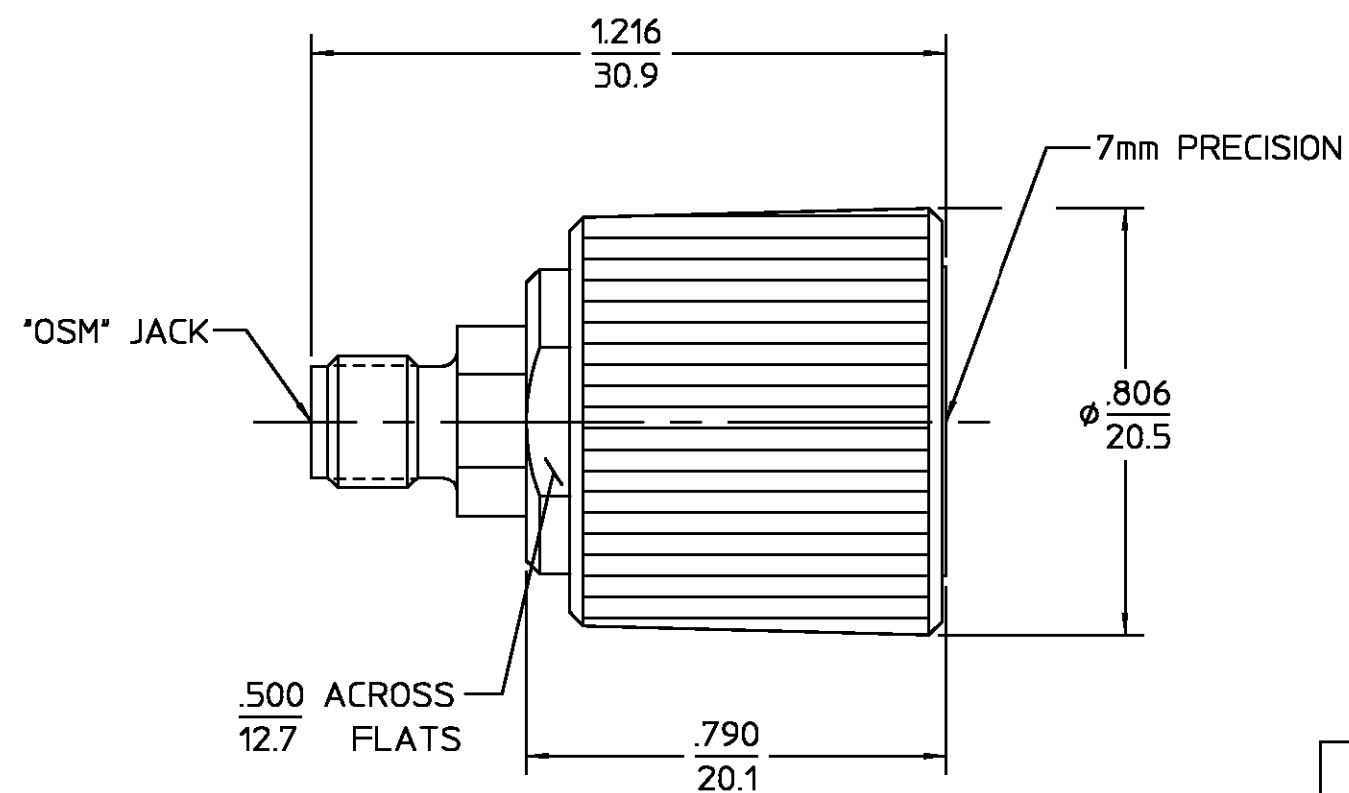

COUPLING NUT SLIDE ASS'Y	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	ELECTRO-POLISHED
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CONTACT EXT.	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CENTER CONTACT	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
DRAWN BY SWA		DATE 9/7/84
CHECKED BY DAC		9/10/84
APPD BY ACS		9/11/84
AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
TITLE 7mm PRECISION TO "OSM" JACK ADAPTER		
USE ASSY PROCEDURE		
NO. A.P. N/A		
SIZE B	CODE IDENT NO. 26805	7482-2240-00
SCALE 3:1	SHEET 1 OF 1	
REV 01 ₂		

- NOTES:
- 1. CAPTURED CENTER CONTACT
 - 2. FREQ: DC ~ 18.0 GHz
 - 3. VSWR (MAX): 1.025 +.002f(GHz)

.XXX = in
XX.X = mm (REF)