

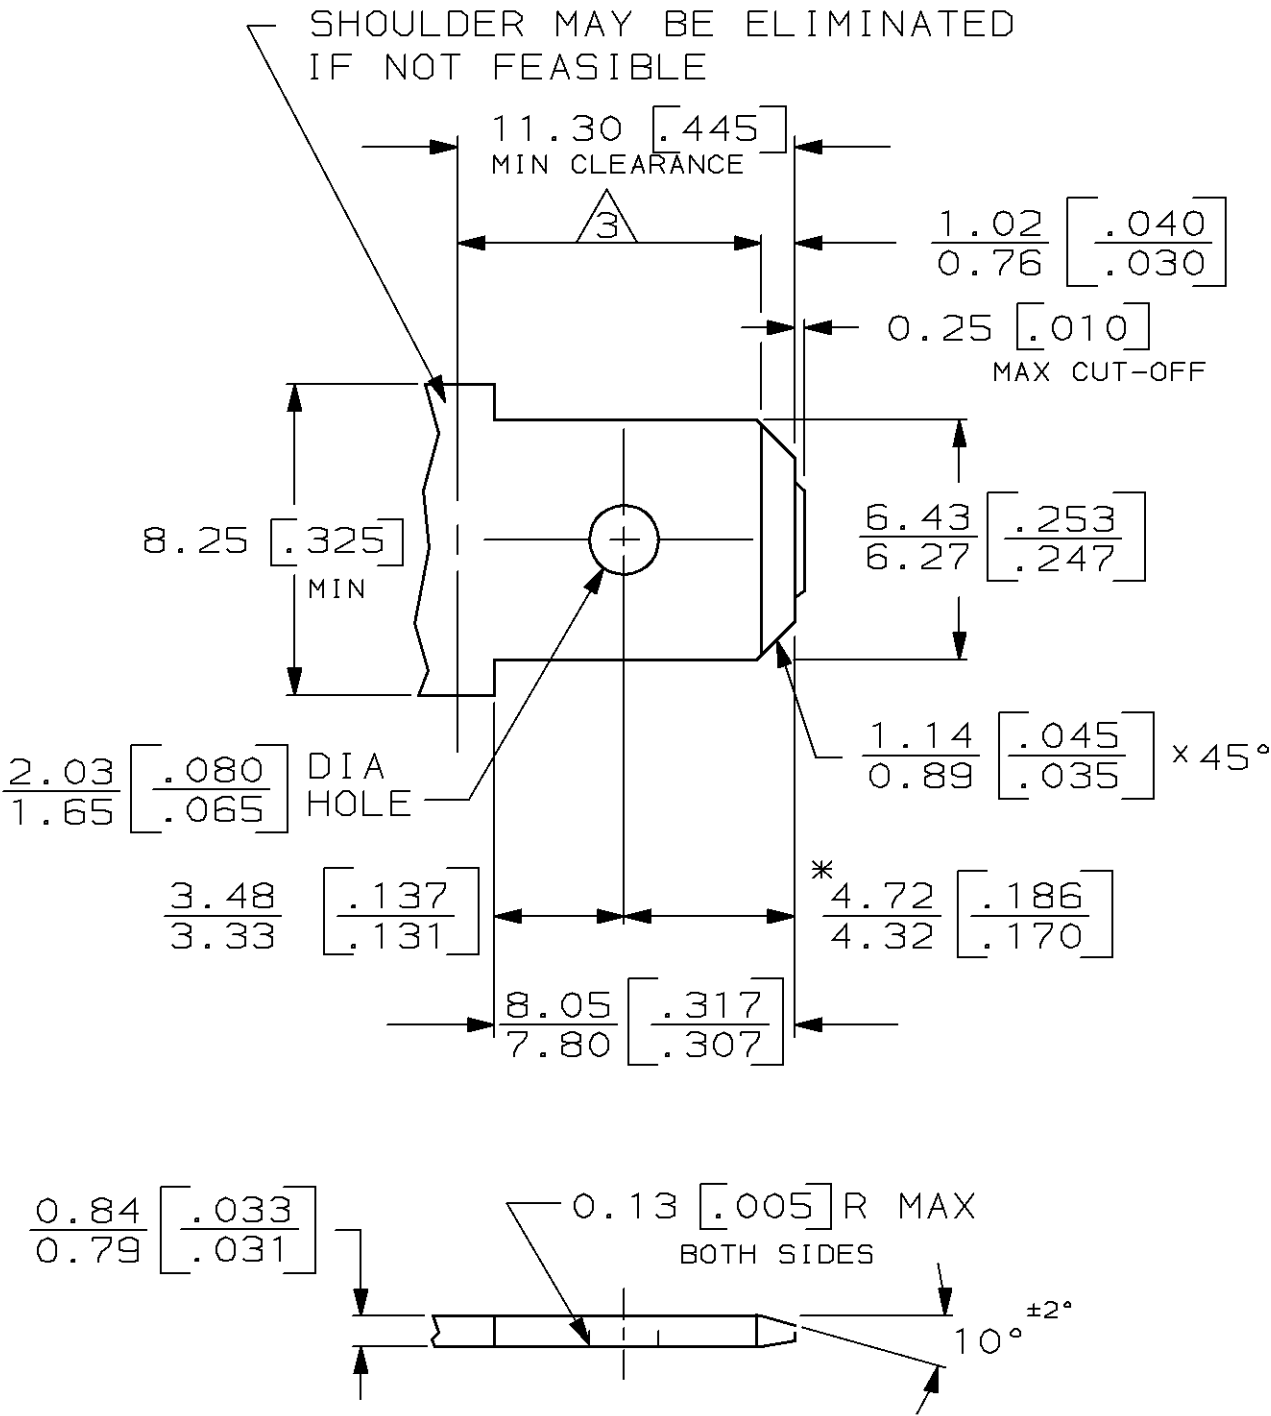
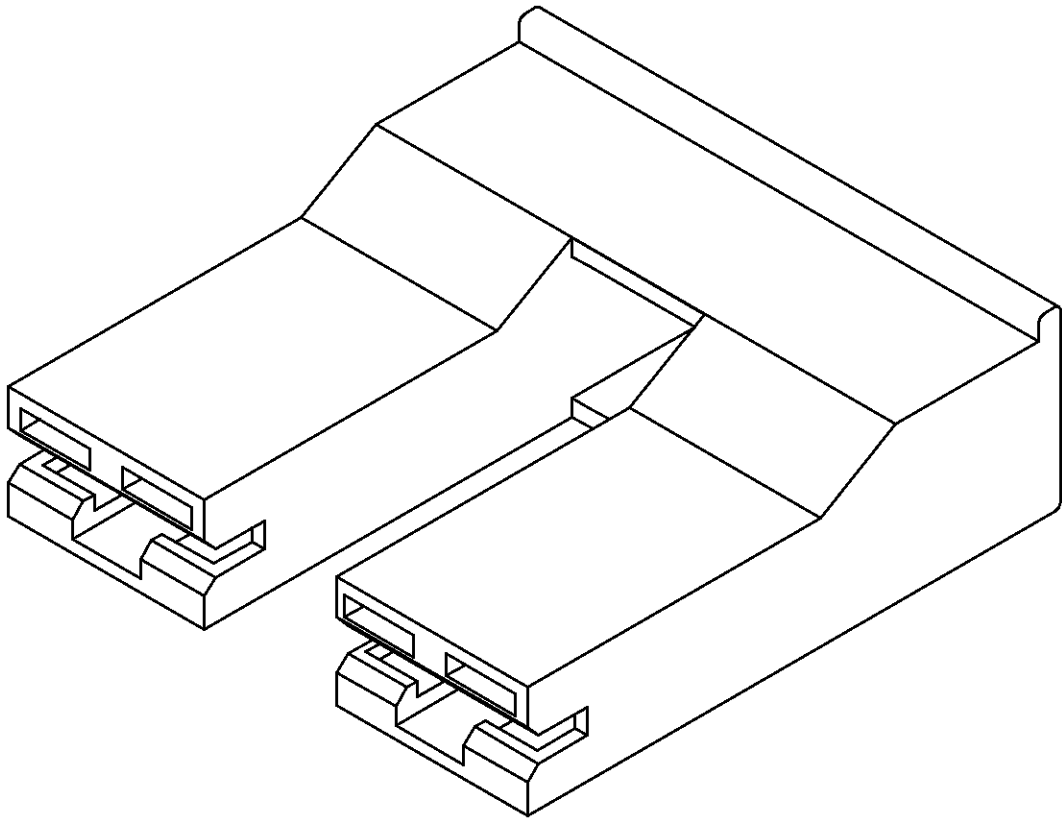
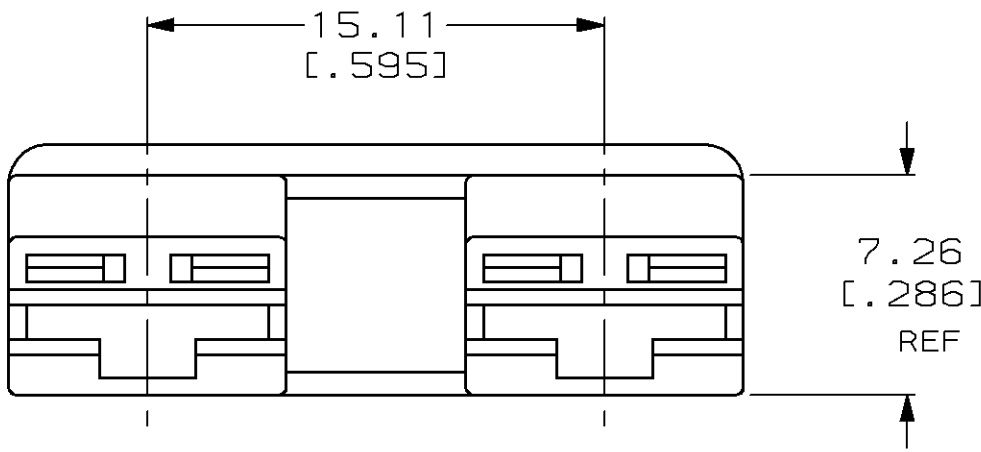


LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
AF	50				D	ADDED -4 PER 061A-0221-98	6/29/98


SUGGESTED MATING TAB

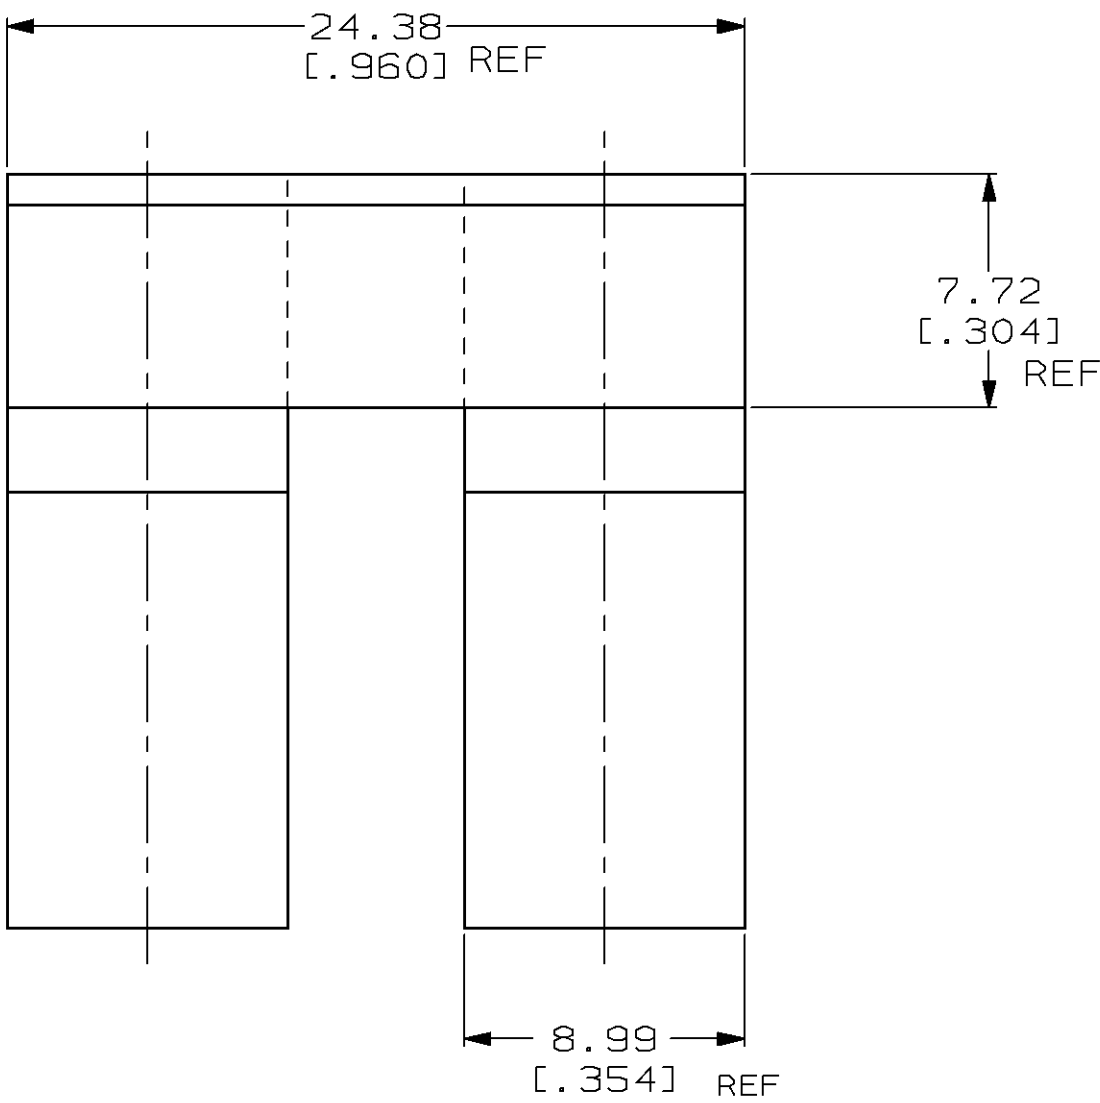

- 1 - MATL: 1/2H BRASS OR NICKEL PL STEEL.
- 2 - NO BURRS PERMISSIBLE AT HOLE.
- 3 - MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- 4 - TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225°F.
- 5 - HOLE MUST BE SYMMETRICAL ABOUT TAB Q WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

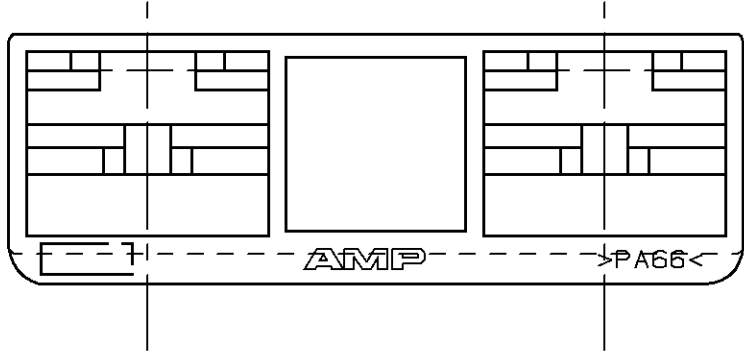

3D VIEW

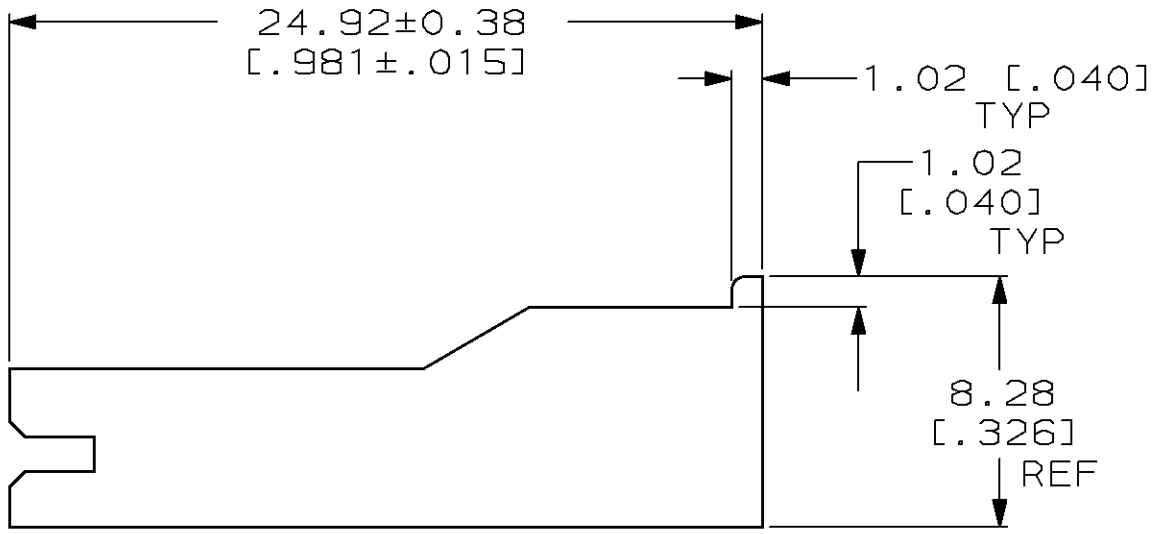

BLUE	6/6 NYLON	521119-4	
PUTTY		521119-2	
NATURAL		521119-1	
COLOR	MATERIAL	PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS ARE IN MM [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± 0.25 [.010] ANGLES ± -	DR 7/3/96 JR RUTH CHK 7/3/96 M FEHER APPD 7/3/96 J GILLESPIE APPD 7/3/96 V KARABCEVSKY PRODUCT SPEC -	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL	SEE TABLE	NAME	
FINISH	SEE TABLE	HOUSING, RECPT, POSITIVE-LOCK, MKIII, 2 CIRCUIT, 6.35 [.250] SERIES	
	APPLICATION SPEC -	SIZE C	FSCM NO 00779
	WEIGHT -	SCALE 4:1	DRAWING NO 521119
			SHEET 1 OF 1