
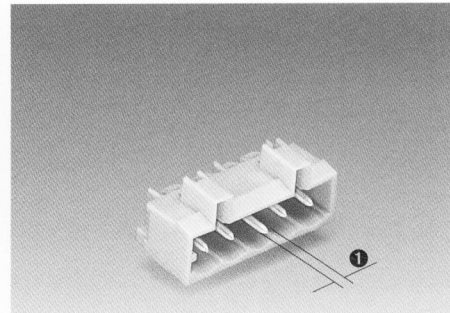
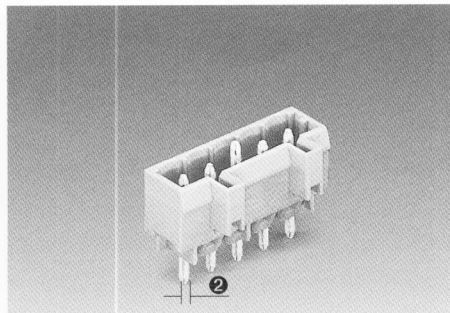


4 Headers with Solder Pins, 100 % Protected against Mismatching, Pin Spacing 5 mm / 0.197 in, Light Grey

40

Pin spacing 5 mm/0.197 in, light grey Straight solder pin 250 V/4 kV/3 300 V, 10 A 12 A 300 V, 15 A Mating direction perpendicular to PCB *	Pin spacing 5 mm/0.197 in, light grey Straight solder pin 250 V/4 kV/3 300 V, 15 A 16 A 300 V, 15 A Mating direction perpendicular to PCB *	Pin spacing 5 mm/0.197 in, light grey Right angle solder pin 250 V/4 kV/3 300 V, 10 A 12 A 300 V, 15 A Mating direction parallel to PCB *
---	---	---

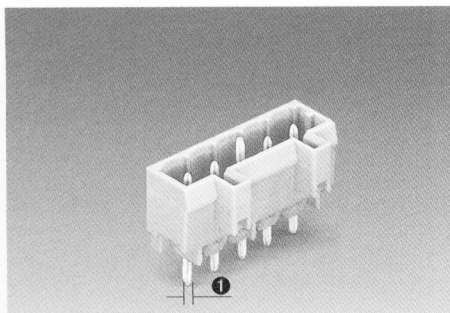


No. of poles	Item-No.	Item-No.	No. of poles	Item-No.	Item-No.	No. of poles	Item-No.	Item-No.
Closed end headers, 100 % protected against mismatching, light grey, straight solder pin, 1 mm x 1 mm 1			Closed end headers, 100 % protected against mismatching, light grey, straight solder pin, 1.2 mm x 1.2 mm 2			Closed end headers, 100 % protected against mismatching, light grey, right angle solder pin, 1 mm x 1 mm 1		
	without	with		without	with		without	with
	preceding ground (earth) contact			preceding ground (earth) contact			preceding ground (earth) contact	
2	721-132/001-000		2	721-162/001-000		2	721-432/001-000	
3	721-133/001-000	721-133/001-040 3	3	721-163/001-000	721-163/001-040 3	3	721-433/001-000	721-433/001-040 3
4	721-134/001-000	721-134/001-040 3	4	721-164/001-000	721-164/001-040 3	4	721-434/001-000	721-434/001-040 3
5	721-135/001-000	721-135/001-040 3	5	721-165/001-000	721-165/001-040 3	5	721-435/001-000	721-435/001-040 3
6	721-136/001-000		6	721-166/001-000		6	721-436/001-000	
7	721-137/001-000		7	721-167/001-000		7	721-437/001-000	
8	721-138/001-000		8	721-168/001-000		8	721-438/001-000	
9	721-139/001-000		9	721-169/001-000		9	721-439/001-000	
10	721-140/001-000		10	721-170/001-000		10	721-440/001-000	
12	721-142/001-000		12	721-172/001-000		12	721-442/001-000	
14	721-144/001-000		14	721-174/001-000		14	721-444/001-000	
16	721-146/001-000		16	721-176/001-000		16	721-446/001-000	
20	721-150/001-000		20	721-180/001-000		20	721-450/001-000	



Accessories

	Coding key, snap-on type, light grey 231-129		Coding key, snap-on type, light grey 231-129		Coding key, snap-on type, light grey 231-129
					Fixing element, horizontal, grey 231-193
					Screw M 2 x 12 with nut 231-195
				for fixing element	
					Tapping screw, B 2.2 x 13 231-194
				fixing hole Ø 1.8 mm	

Dimensions (in mm) Diameter of drilled hole: $1.4^{+0.1}$ mm (solder pin 1 mm x 1 mm); $1.7^{+0.1}$ mm (solder pin 1.2 mm x 1.2 mm)

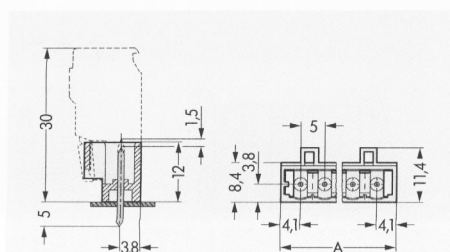

$$A = (\text{No. of poles} \times \text{pin spacing}) + 3.2 \text{ mm}$$

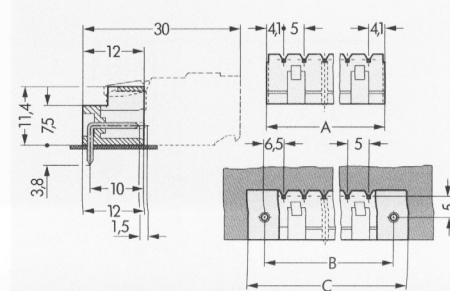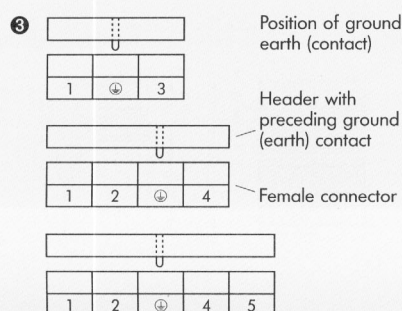

$$A = (\text{No. of poles} \times \text{pin spacing}) + 3.2 \text{ mm}$$

$$B = A + 5 \text{ mm}; C = B + 7.4 \text{ mm}$$

* For further approvals with corresponding ratings see pages 10.3 ff.