


Micro-Change[®] Dual Keyway Receptacles


Product Specifications

MECHANICAL INSERT MATERIAL: SHELL MATERIAL: CONTACT MATERIAL: CONTACT PLATING: WIRE TYPE(S): WIRE STRANDING: O-RING: LOCKNUT:	NYLON ANODIZED ALUMINUM COPPER ALLOY GOLD - 5 μ IN. (MIN) PALLADIUM/NICKEL - 20 μ IN. (MIN) 22 AWG: PVC INSULATED 26 X #36 NITRILE RUBBER STEEL	ENVIRONMENTAL PROTECTION: AMBIENT OPERATING TEMP: HIGH PRESSURE WATER SPRAY:	IP 68, NEMA 6P - PER NEMA STD. 250 -20° TO +80°C 1000 PSI
ELECTRICAL VOLTAGE RATING: AMPERAGE: CONTACT RESISTANCE: ISOLATION RESISTANCE :	300VAC/300 VDC 4A $\leq 5m\Omega$, (AFTER 100 MATE/UNMATE CYCLES - PER MIL STD. 1344, 3004.1) $\geq 1000M\Omega$	CERTIFICATIONS UL: CSA: VDE:	UL LISTED, FILE NO. E155210 CSA CERTIFIED, FILE NO. LR6837 SPACINGS TO VDE 0110 GROUP C (250VAC/300VDC)


1/4" NPT with External Threads /Male

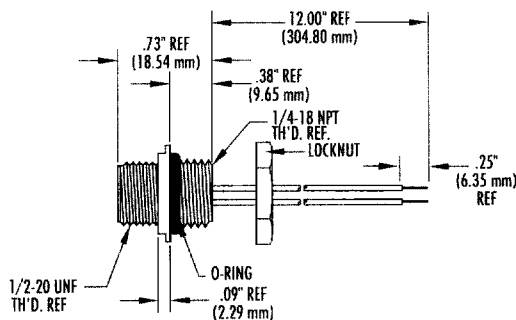


1/2" NPT with External Threads /Male

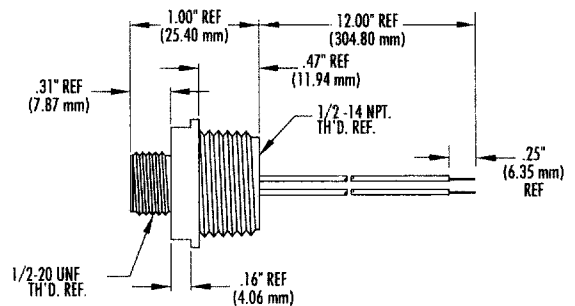


1/4" NPT with External Threads /Female

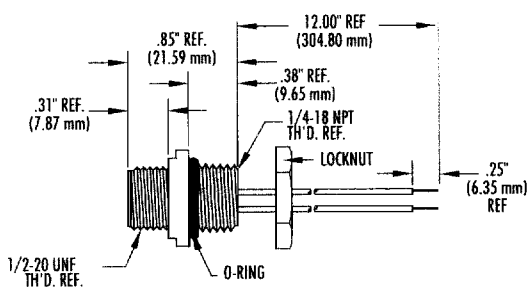


1/2" NPT with External Threads /Female

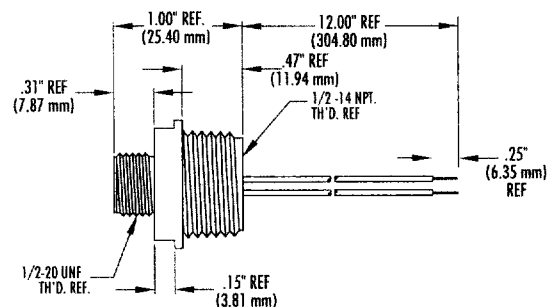


1/4" NPT with Internal Threads /Female

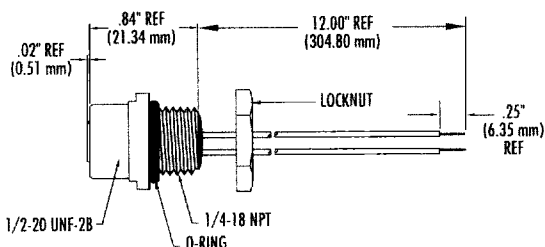

Receptacle Knock-Out
for 1/2" NPT



Receptacle Knock-Out
for 1/4" NPT



Micro-Change® Dual Keyway Receptacles

RECEPTACLES WITH 12" LEADS

POLES	FACE VIEW MALE	WIRING CODE	1/4" NPT WITH EXTERNAL THREADS		1/2" NPT WITH EXTERNAL THREADS		1/4" NPT FEMALE WITH INTERNAL THREAD
			MALE	FEMALE	MALE	FEMALE	
2		1-BROWN 2-BLUE	7R2A06A19A120	7R2A04A19A120	7R2006A19A120	7R2004A19A120	7R2A00A19A120
3		1-GREEN (GND) 2-RED-BLK. TR. 3-RED WHT. TR.	7R3A06A19A120	7R3A04A19A120	7R3006A19A120	7R3004A19A120	7R3A00A19A120
4		1-RED-BLK. TR. 2-RED-WHT. TR. 3-RED 4-GREEN (GND)	7R4A06A19A120	7R4A04A19A120	7R4006A19A120	7R4004A19A120	7R4A00A19A120
5		1-RED-WHT. TR. 2-RED 3-GREEN (GND) 4-RED-YEL. TR. 5-RED-BLK. TR.	7R5A06A19A120	7R5A04A19A120	7R5006A19A120	7R5004A19A120	7R5A00A19A120
6		1-RED-WHT. TR. 2-RED 3-GREEN (GND) 4-RED-YEL. TR. 5-RED-BLK. TR. 6-RED-BLU. TR.	7R6A06A19A120	N/A	7R6006A19A120	N/A	7R6A00A19A120