


Applications

- High frequency DC-DC converters

V_{DSS}	$R_{DS(on)} \text{ max}$	I_D
200V	2.2 Ω	0.6A

Benefits

- Low Gate to Drain Charge to Reduce Switching Losses
- Fully Characterized Capacitance Including Effective C_{OSS} to Simplify Design, (See App. Note AN1001)
- Fully Characterized Avalanche Voltage and Current

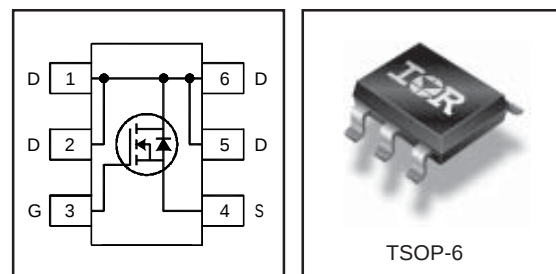

Absolute Maximum Ratings

	Parameter	Max.	Units
$I_D @ T_A = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$	0.6	A
$I_D @ T_A = 70^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$	0.48	
I_{DM}	Pulsed Drain Current ①	4.8	
$P_D @ T_A = 25^\circ\text{C}$	Power Dissipation	2.0	W
	Linear Derating Factor	0.016	W/ $^\circ\text{C}$
V_{GS}	Gate-to-Source Voltage	± 30	V
dv/dt	Peak Diode Recovery dv/dt ②	9.6	V/ns
T_J	Operating Junction and	-55 to + 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 seconds	300 (1.6mm from case)	

Thermal Resistance

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JA}$	Junction-to-Ambient ④	—	62.5	$^\circ\text{C/W}$

Notes ① through ⑥ are on page 8
www.irf.com

IRF5801

International
IR Rectifier

Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	200	—	—	V	$V_{GS} = 0V, I_D = 250\mu A$
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.26	—	V/ $^\circ\text{C}$	Reference to 25°C , $I_D = 1mA$ ③
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	—	2.2	Ω	$V_{GS} = 10V, I_D = 0.36A$ ③
$V_{GS(th)}$	Gate Threshold Voltage	3.0	—	5.5	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
I_{DSS}	Drain-to-Source Leakage Current	—	—	25	μA	$V_{DS} = 200V, V_{GS} = 0V$
		—	—	250		$V_{DS} = 160V, V_{GS} = 0V, T_J = 150^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{GS} = 30V$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -30V$

Dynamic @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)





	Parameter	Min.	Typ.	Max.	Units	Conditions
g_{fs}	Forward Transconductance	0.44	—	—	S	$V_{DS} = 50V, I_D = 0.36A$
Q_g	Total Gate Charge	—	3.9	—	nC	$I_D = 0.36A$
Q_{gs}	Gate-to-Source Charge	—	0.8	—		$V_{DS} = 160V$
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	2.2	—		$V_{GS} = 10V$
$t_{d(on)}$	Turn-On Delay Time	—	6.5	—	ns	$V_{DD} = 100V$
t_r	Rise Time	—	8.0	—		$I_D = 0.36A$
$t_{d(off)}$	Turn-Off Delay Time	—	8.8	—		$R_G = 53\Omega$
t_f	Fall Time	—	19	—		$V_{GS} = 10V$ ③
C_{iss}	Input Capacitance	—	88	—	pF	$V_{GS} = 0V$
C_{oss}	Output Capacitance	—	18	—		$V_{DS} = 25V$
C_{rss}	Reverse Transfer Capacitance	—	6.3	—		$f = 1.0MHz$
C_{oss}	Output Capacitance	—	102	—		$V_{GS} = 0V, V_{DS} = 1.0V, f = 1.0MHz$
C_{oss}	Output Capacitance	—	8.4	—		$V_{GS} = 0V, V_{DS} = 160V, f = 1.0MHz$
$C_{oss \text{ eff.}}$	Effective Output Capacitance	—	26	—		$V_{GS} = 0V, V_{DS} = 0V \text{ to } 160V$ ③

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy②	—	9.9	mJ
I_{AR}	Avalanche Current①	—	0.6	A

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	1.8	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	4.8		
V_{SD}	Diode Forward Voltage	—	—	1.3	V	$T_J = 25^\circ\text{C}, I_S = 0.36A, V_{GS} = 0V$ ③
t_{rr}	Reverse Recovery Time	—	45	—	ns	$T_J = 25^\circ\text{C}, I_F = 0.36A$
Q_{rr}	Reverse Recovery Charge	—	54	—	nC	$di/dt = 100A/\mu s$ ③

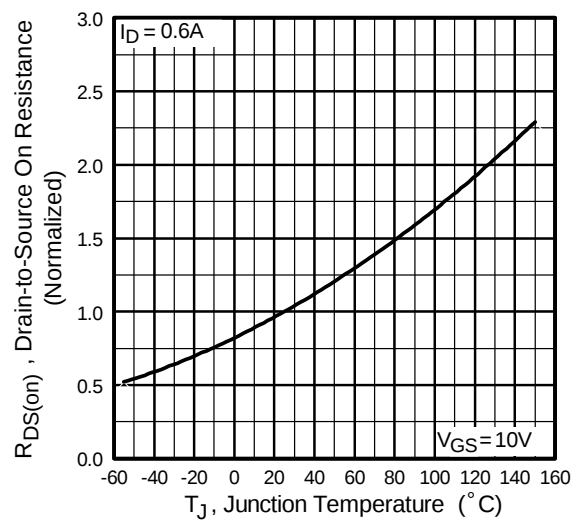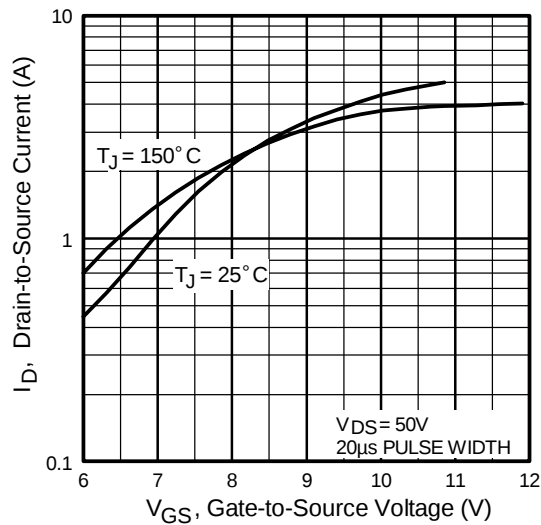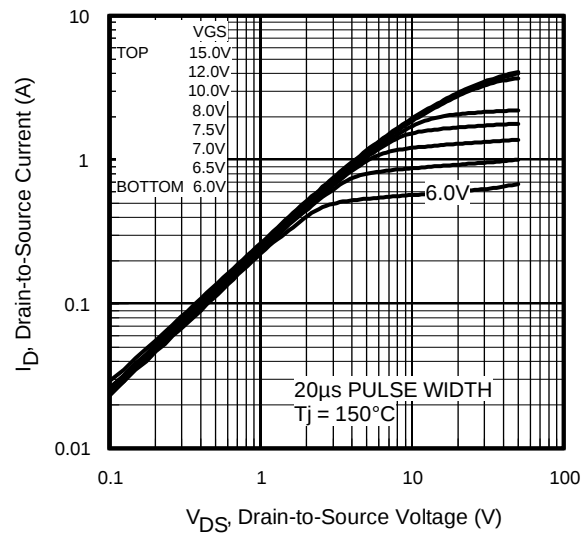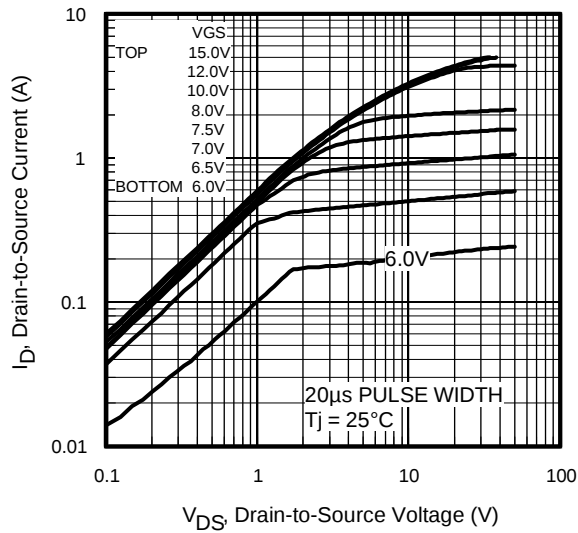

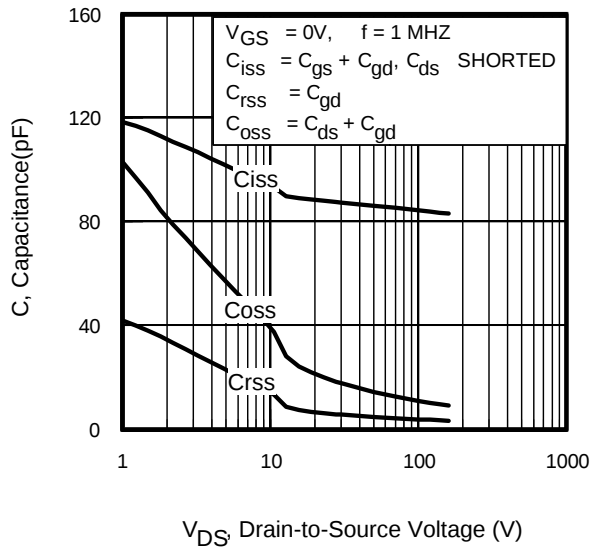


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

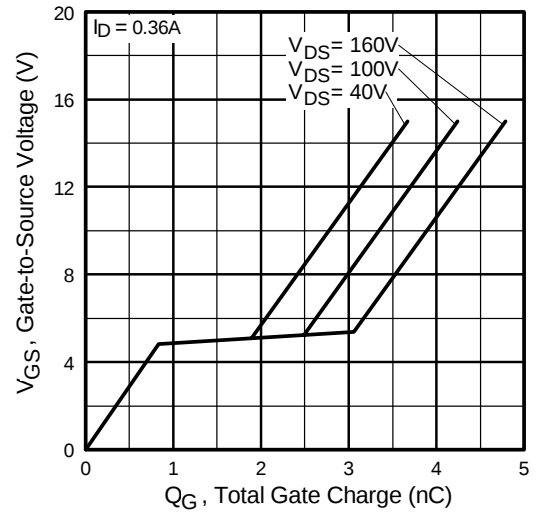


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

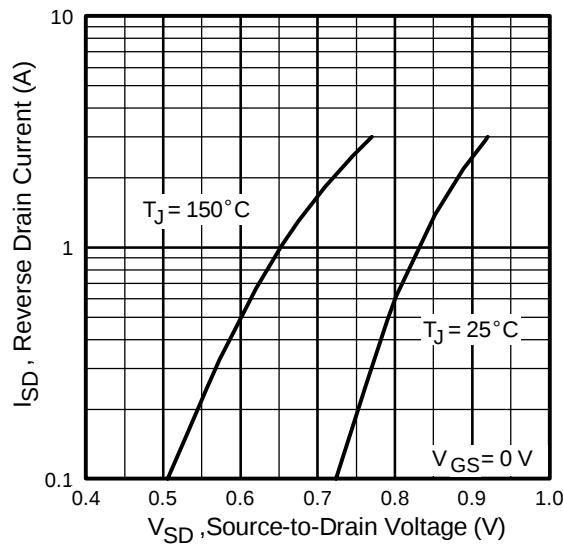


Fig 7. Typical Source-Drain Diode Forward Voltage

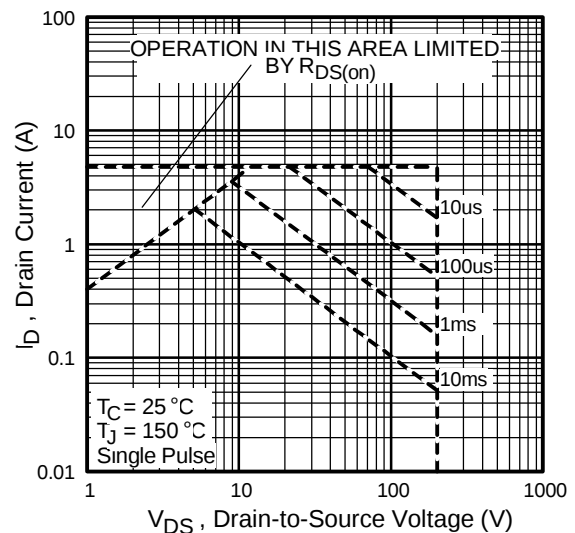


Fig 8. Maximum Safe Operating Area

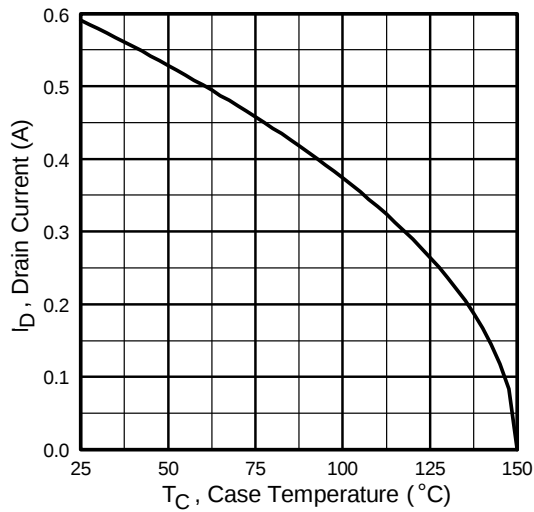


Fig 9. Maximum Drain Current Vs. Case Temperature

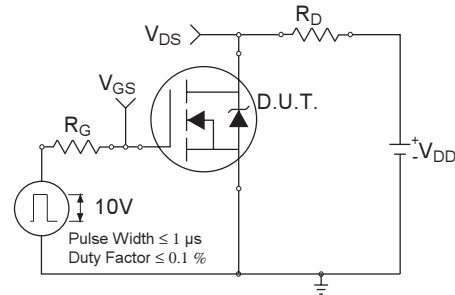


Fig 10a. Switching Time Test Circuit

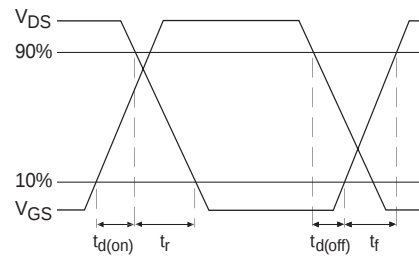


Fig 10b. Switching Time Waveforms

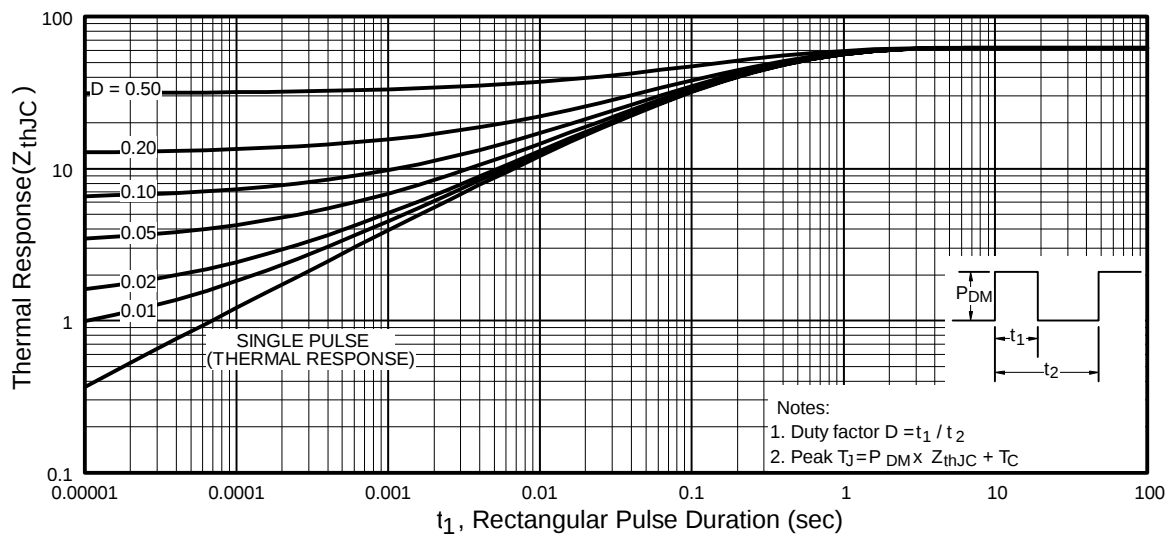


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

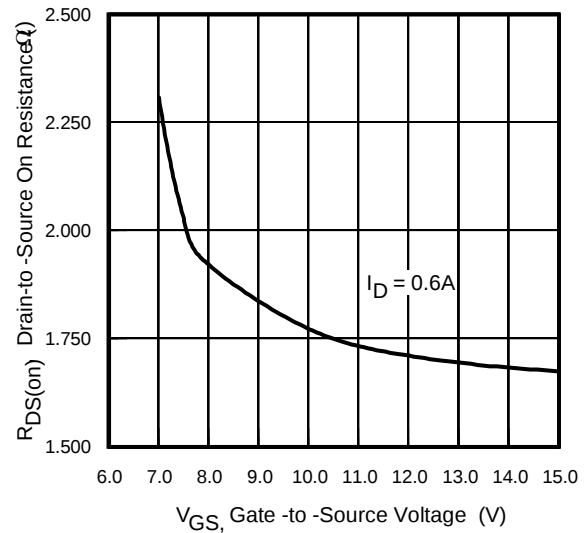
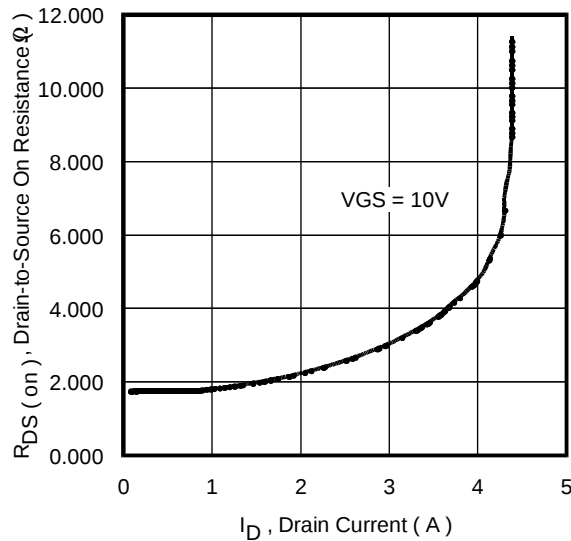


Fig 12. On-Resistance Vs. Drain Current

Fig 13. On-Resistance Vs. Gate Voltage

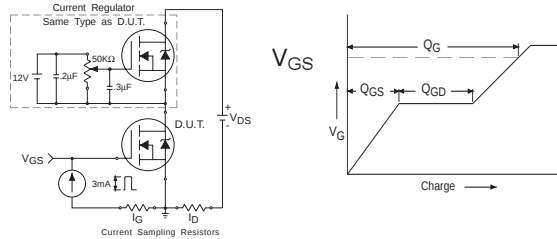


Fig 14a&b. Basic Gate Charge Test Circuit and Waveform



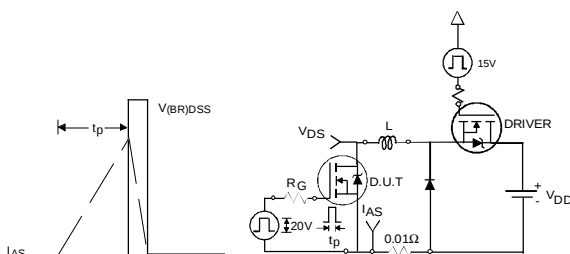



Fig 15a&b. Unclamped Inductive Test circuit and Waveforms

Fig 15c. Maximum Avalanche Energy Vs. Drain Current

TSOP-6 Package Outline

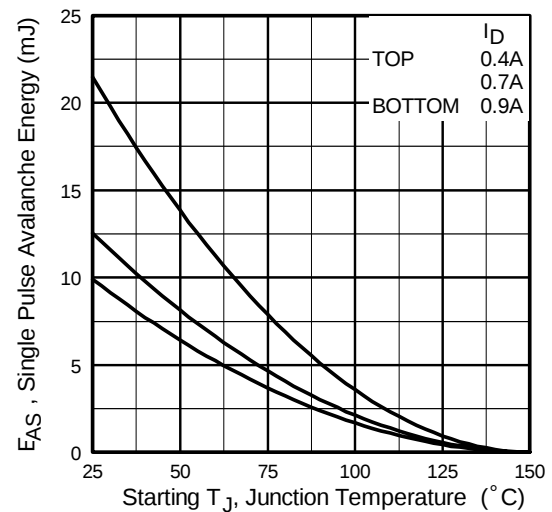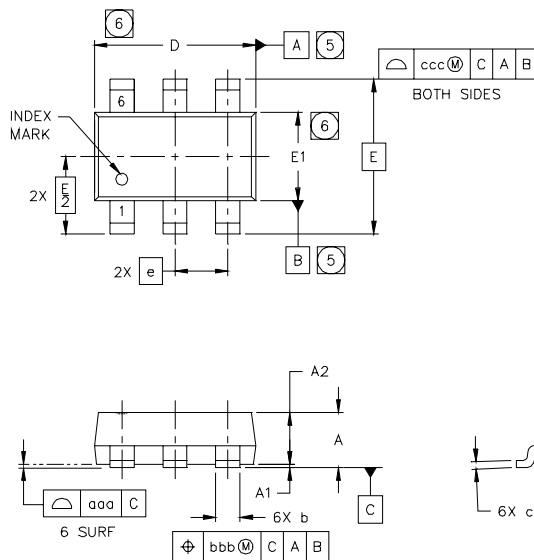


SYMBOL	M0-193AA DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	---	---	1.10	---	---	.0433
A1	0.01	---	0.10	.0004	---	.0039
A2	0.80	0.90	1.00	.0315	.0354	.0393
b	0.25	---	0.50	.0099	---	.0196
c	0.10	---	0.26	.004	---	.010
D	2.90	3.00	3.10	.115	.118	.122
E	2.75 BSC			.108 BSC		
E1	1.30	1.50	1.70	.052	.059	.066
e	1.00 BSC			.039 BSC		
L	0.20	0.40	0.60	.0079	.0157	.0236
L1	0.30 BSC			.0118 BSC		
θ	0°	---	8°	0°	---	8°
aaa	0.10			.004		
bbb	0.15			.006		
ccc	0.25			.010		

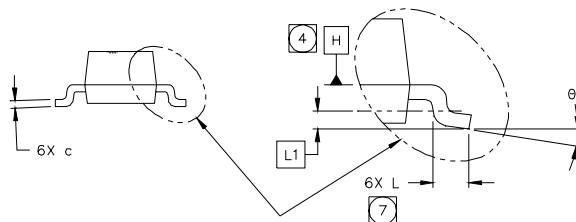

TSOP-6 Part Marking Information

EXAMPLE: THIS IS AN SI3443DV

WW = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR



YEAR	Y	WORK WEEK	W
2001	1	01	A
2002	2	02	B
2003	3	03	C
2004	4	04	D
2005	5		
1996	6		
1997	7		
1998	8		
1999	9		
2000	0	24	X
		25	Y
		26	Z

WW = (27-52) IF PRECEDED BY A LETTER

YEAR	Y	WORK WEEK	W
2001	A	27	A
2002	B	28	B
2003	C	29	C
2004	D	30	D
2005	E		
1996	F		
1997	G		
1998	H		
1999	J		
2000	K	50	X
		51	Y
		52	Z

PART NUMBER EXAMPLES:

3A = SI3443DV

DATE CODE EXAMPLES:


YWW = 9603 = 6C

YWW = 9632 = FF

IRF5801


International
IR Rectifier

TSOP-6 Tape & Reel Information

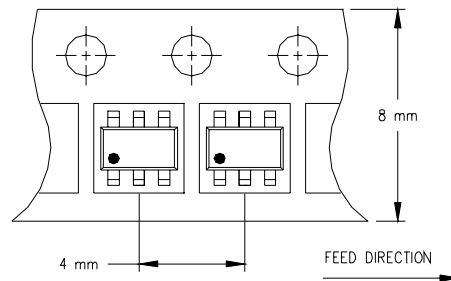

NOTES:

1. OUTLINE CONFORMS TO EIA-481 & EIA-541.

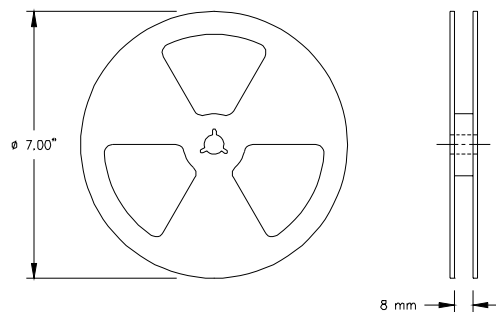

NOTES:

1. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, $L = 27\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 0.36\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ When mounted on 1 inch square copper board, $t < 10\text{sec}$.
- ⑤ C_{OSS} eff. is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 80% V_{DSS} .
- ⑥ $I_{SD} \leq 0.36\text{A}$, $di/dt \leq 93\text{A}/\mu\text{s}$, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq 150^\circ\text{C}$.

Data and specifications subject to change without notice.
This product has been designed and qualified for the industrial market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.7/02

www.irf.com

Part: IRF5801TRPBF

Description: 200V Single N-Channel HEXFET Power MOSFET in a TSOP-6 (Micro 6) package

Support Docs: [Datasheet](#)[Spice File](#)[Saber File](#)[News Release](#)[Lead Free Datasheet](#)**Specifications**

Parameter	Value
Package	TSOP-6 (Micro 6)
Circuit	Discrete
VBRDSS (V)	200
VGs Max (V)	30
RDS(on) Max 10V (mOhms)	2200.0
ID @ TC = 25C (A)	0.6
ID @ TA = 25C (A)	0.60
ID @ TA = 70C (A)	0.48
Qg Typ (nC)	3.9
Qgd Typ (nC)	2.2
Rth(JC) (K/W)	62.5 (JA)
Power Dissipation @ TC = 25C (W)	2.0
Power Dissipation @ TA = 25C (W)	2.00
Part Status	Active
PbF	PbF Option Available
Package Class Can	Surface Mount with Leads

Packaging Options

Product ID	Description	Status	Standard Pack	1K Budgetary Pricing (USD)	Qty	
IRF5801TR	A IRF5801 with Tape and Reel Packaging	Not for New Designs	3000			ADD TO CART
IRF5801TRPBF	Similar to IRF5801TR with Lead-Free Packaging	Active	3000	\$0.12		ADD TO CART

Package Support Docs



Micro6™ (TSOP6)

- [Package Outline](#)
- [Part Marking \(Micro6\)](#)
- [Part Marking \(TSOP6\)](#)
- [Tape & Reel](#)
- [PbF Compliance Report \(Micro6\)](#)
- [PbF Compliance Report \(TSOP6\)](#)

[Click here to display Distributor Inventory](#)

Part Search:



International Sites: | [Chinese](#) •••• | [Korean](#) ••• | [Japanese](#) ••• |

[About International Rectifier](#) | [Contact Us](#) | [Privacy](#)

© 1995-2009 International Rectifier



THE POWER MANAGEMENT LEADER
THE POWER MANAGEMENT LEADER
THE POWER MANAGEMENT LEADER

[PRODUCT LINE](#)

[SALES SUPPORT](#)

[TECHNICAL LIBRARY](#)

[DESIGN SUPPORT](#)

[LOGIN/MY PAGE](#)

Cookies must be enabled to browse the IR catalog.

See [Privacy Statement](#) for more information.

SEARCH

GO

[Part Search](#)

[Site Search](#)

APPLICATIONS

AC-DC	A&D/HiRel
Appliances	Audio
Automotive	Desktop/Server
DC-DC	Enterprise Power
Lighting	Motor Control
NetCom	Portables

International Sites: | [Chinese](#) | [Korean](#) | [Japanese](#) |

[About International Rectifier](#) | [Contact Us](#) | [Privacy](#)

© 1995-2009 International Rectifier