

GLP8-148M
VHF Japan Band

Inquir

Applocation

for Spurious reduction

Characteristics


GLP8-148M	
Zin/Zout	50 ohm Nominal
Pass Band	144 up to 148MHz
Insertion Loss	0.7dB max (144 up to 148MHz)
V.S.W.R	1.5 max (144 up to 148MHz)
Attenuation	25 dB min (at 2f : 288 up to 296MHz)
	25 dB min (at 3f : 432 up to 444MHz)
Rated Power	5W (144 up to 148MHz)
Max Input Power	7W 5minutes

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

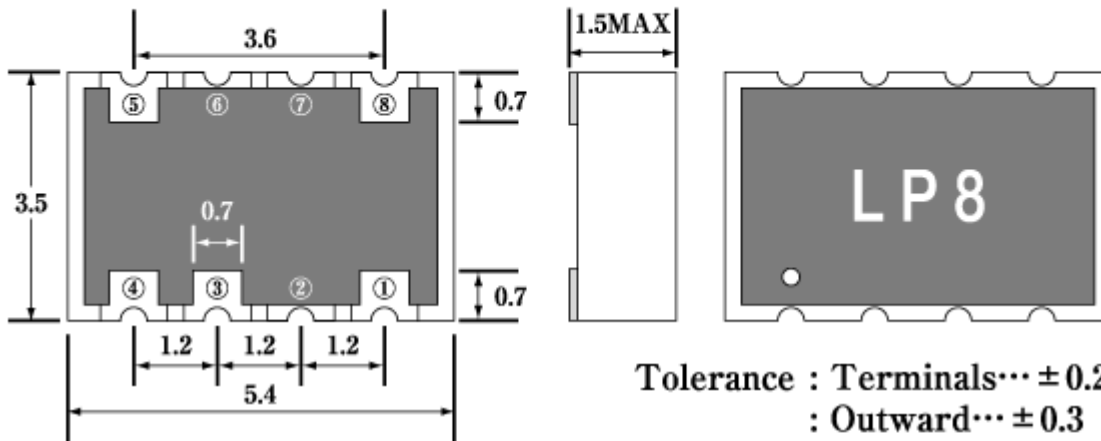

Tolerance : Terminals... ±0.2
: Outward... ±0.3

Terminal	
①	Input
③	GND
④	Output
⑤	GND
⑧	GND

Note

Do not connect any wiring (inclusive of grounding) to terminals No.2,6 and No.7. They are provided solely for internal connections.

Frequency Data

