

# Rectifiers

## (15 A to 25 A)


### General Description

Teccor manufactures 15 A rms to 25 A rms rectifiers with voltages rated from 200 V to 1000 V. Due to the electrically-isolated TO-220 package, these rectifiers may be used in common anode or common cathode circuits using only one part type, thereby simplifying stock requirements.

Teccor's silicon rectifiers feature glass-passivated junctions to ensure long term reliability and stability. In addition, glass offers a rugged, reliable barrier against junction contamination.

### Features

- Electrically-isolated packages
- High voltage capabilities — 200 V to 1000 V
- High surge capabilities — up to 350 A
- Glass-passivated junctions

Type	Part Number	$V_{RRM}$	$V_R$	$I_{F(AV)}$	$I_{F(RMS)}$	$I_{FSM}$	$I_{RM}$			$V_{FM}$	$I^2t$	$R_{\theta JC}$
	Isolated											
	 TO-220											
	See "Package Dimensions" section for variations. (4)											
		Volts	Volts	Amps	Amps	Amps	mA			Volts	Amps <sup>2</sup> Sec	°C/W
				(1)		(2)	(3)					

## Test Conditions

$I^2t$  — RMS surge (non-repetitive) forward current for 8.3 ms for fusing

$I_{F(AV)}$  — Average forward current

$I_{F(RMS)}$  — RMS forward current

$I_{FSM}$  — Peak one-cycle surge current

$I_{RM}$  — Peak reverse current

$R_{\theta JC}$  — Thermal resistance (steady state) junction to case

$V_{FM}$  — Peak forward voltage at rated average forward current

$V_R$  — DC blocking voltage

$V_{RRM}$  — Peak repetitive reverse voltage

## General Notes

- Operating temperature range ( $T_J$ ) is -40 °C to +125 °C.
- Storage temperature range ( $T_S$ ) is -40 °C to +125 °C.
- Lead solder temperature is a maximum of 230 °C for 10 seconds maximum at a minimum of 1/16" (1.59 mm) from case.
- The case temperature ( $T_C$ ) is measured as shown on dimensional outline drawings in the "Package Dimensions" section of this catalog.
- Teccor's electrically-isolated TO-220 devices withstand a high potential test of 2500 V ac rms from leads to mounting tab over the operating temperature range.
- Typical Reverse Recovery Time ( $t_{rr}$ ) is 4  $\mu$ s. (Test conditions = 0.9 A forward current and 1.5 A reverse current.)

## Electrical Specification Notes

- See Figure E7.3 for current rating at specified case temperature.
- For more than one full cycle rating, see Figure E7.4.
- $T_C = T_J$  for test conditions
- See package outlines for lead form configurations. When ordering special lead forming, add type number as suffix to part number.

## Electrical Isolation

Electrical Isolation from Leads to Mounting Tab *	
V AC RMS	TO-220 Isolated
2500	Standard
4000	Optional **

\* UL Recognized File #E71639

\*\* For 4000 V isolation, use "V" suffix in the part number.

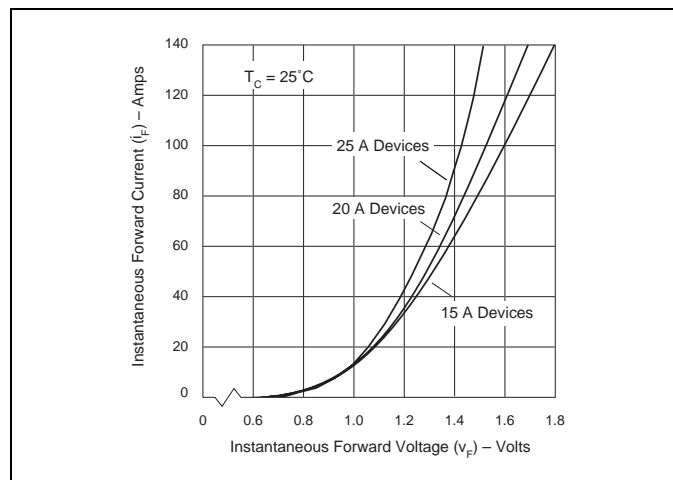


Figure E7.1 Instantaneous Forward Current versus Forward Voltage (Typical)

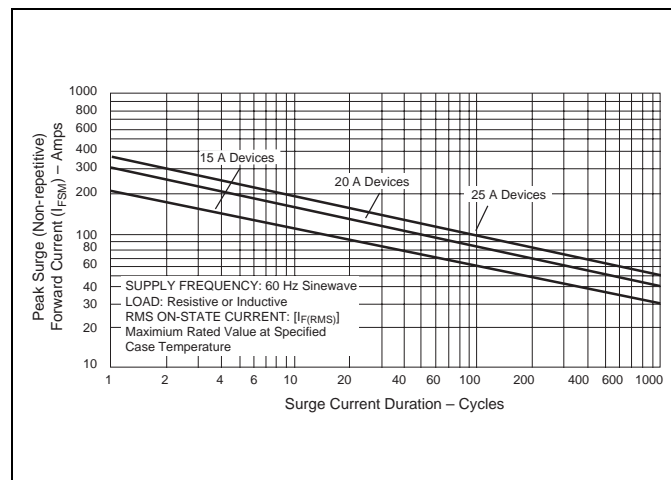


Figure E7.4 Peak Surge Forward Current versus Surge Current Duration

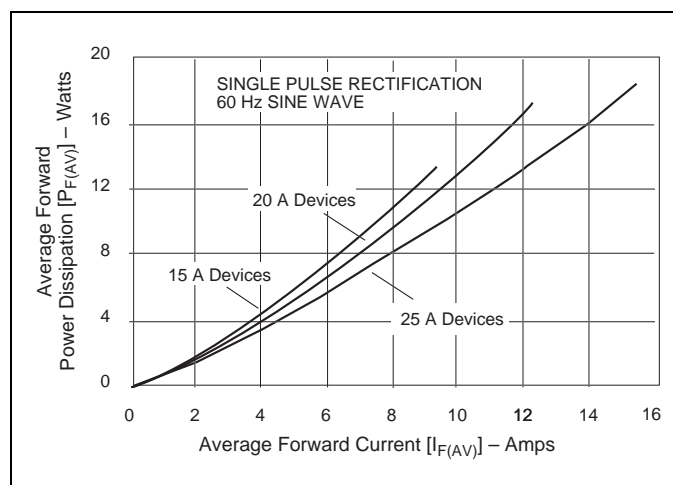


Figure E7.2 Forward Power Dissipation (Typical)

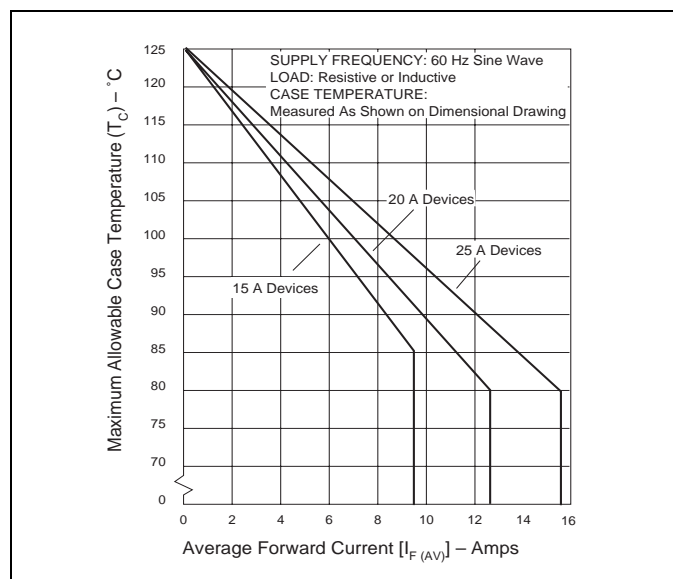


Figure E7.3 Maximum Allowable Case Temperature versus Average Forward Current