



Catalog Number	Accepts AØ o/c
NS-6792-11	.087

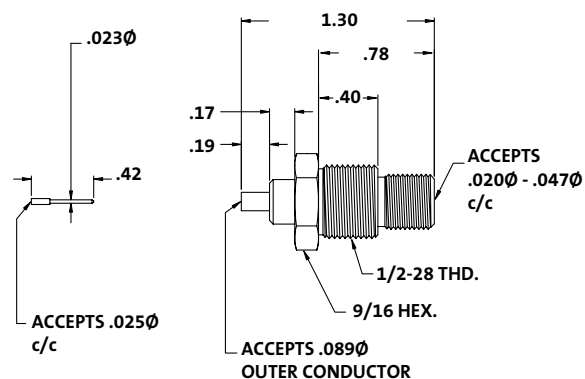

Female Conformable Coax
Solder Connector


Catalog Number	Accepts AØ Max c/c	BØ	C	Accepts DØ Max Dielectric	E
GF-1097-1	.025	.023	.42	.066	.5
GF-1097-5	.025	.023	.42	.100	.5
GF-1097-7	.025	.023	.42	.066	.250
GF-1097-13	.025	.032	.5	.066	.5
GF-1097-15*	.025	.032	.5	.066	.5
GF-1097-17	.025	.025	.5	.066	.5
GF-1097-19	.013	.023	.42	.066	.5
NS-3766-1	.013	.023	.42	.066	.5
NS-6799-9	.025	.023	.42	.066	.5

*Au Plated Pin

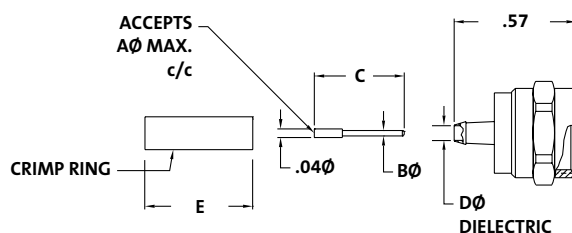

RG-179B/U Coax Connector &
RG-179B/U Double Braided Coax Connector

Catalog Number	AØ	Thd Flats
GF-1220-1	.066	None
NS-6792-3	.100	SD

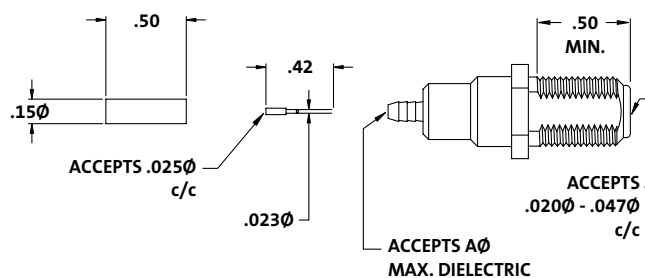

RG-179B/U Female Coax Connector