
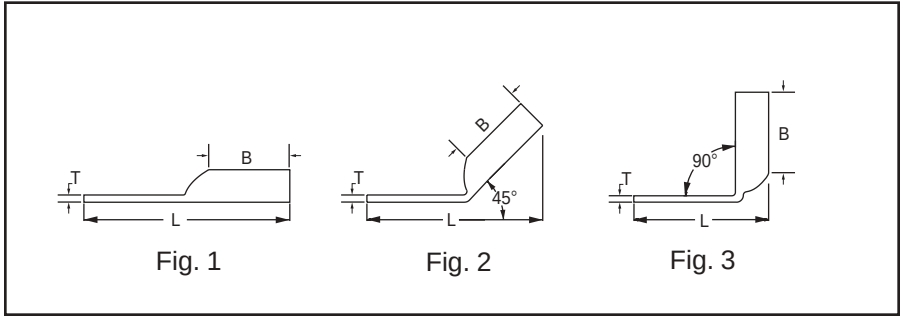
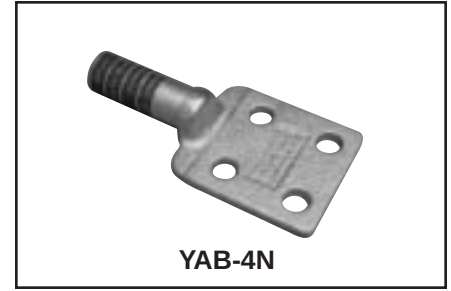


FOUR HOLE HYLUG™ CODE CONDUCTOR

TYPE YA

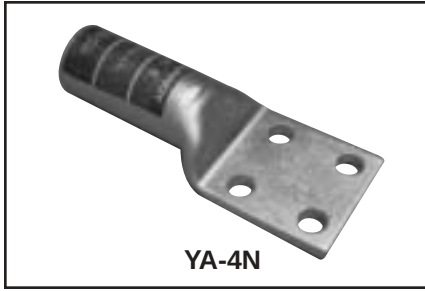

C-85

Catalog Number	Fig.#	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Tongue Angle	Installation Tooling						Wire Strip Length
		AWG	*** MM ²					B	T	L	Hydraulic (Y35, Y39, Y750, Y46*)			
											* **	Color Code	Die Index	
YA444N	1	1000 kcmil	500	1/2"	1.75"	3"	Straight	3.00	.23	7.14	P44RT	White	27	3-1/16"
YA444N-45	2			1/2"	1.75"	3"	45 Degree	3.00	.23	6.71	P44RT	White	27	1-15/16"
YA444N-90	3			1/2"	1.75"	3"	90 Degree	3.00	.23	4.02	P44RT	White	27	1-15/16"
YA-454N	1	1250 kcmil	-	1/2"	1.75"	3"	Straight	3.19	.30	7.44	P45RT	Yellow	29	3-1/4"
YA-454N-45	2		1/2"	1.75"	3"	45 Degree	3.19	.30	7.03	P45RT	Yellow	29	2-1/16"	
YA-454N-90	3		1/2"	1.75"	3"	90 Degree	3.19	.30	4.13	P45RT	Yellow	29	2-1/16"	
YA464N	1	1500 kcmil	-	1/2"	1.75"	3"	Straight	3.19	.34	7.55	P46RT	Green	31	3-1/4"
YA464N-45	2		1/2"	1.75"	3"	45 Degree	3.19	.34	7.15	P46RT	Green	31	3-5/16"	
YA464N-90	3		1/2"	1.75"	3"	90 Degree	3.19	.34	4.29	P46RT	Green	31	3-5/16"	
YA47N	1	1750 kcmil	-	1/2"	1.75"	3.10"	Straight	3.44	.39	7.89	†L47RT	Gray	33	3-1/2"
YA47N-45	2		1/2"	1.75"	3.10"	45 Degree	3.44	.39	7.45	†L47RT	Gray	33	3-1/2"	
YA47N-90	3		1/2"	1.75"	3.10"	90 Degree	3.44	.39	4.30	†L47RT	Gray	33	3-1/2"	
YA484N	1	2000 kcmil	-	1/2"	1.75"	3.06"	Straight	3.44	.46	7.98	†L48RT	Brown	34	3-1/2"
YA484N-45	2		1/2"	1.75"	3.06"	45 Degree	3.44	.46	7.60	†L48RT	Brown	34	3-1/2"	
YA484N-90	3		1/2"	1.75"	3.06"	90 Degree	3.44	.46	4.40	†L48RT	Brown	34	3-1/2"	
YA4864N	1	2500 kcmil	-	1/2"	1.75"	3.46"	Straight	4.69	.52	9.38	†L486RT	-	-	4-3/4"
YA4864N-45	2		1/2"	1.75"	3.46"	Straight	4.69	.52	8.72	†L486RT	-	-	4-3/4"	
YA4864N-90	3		1/2"	1.75"	3.46"	Straight	4.69	.52	4.55	†L486RT	-	-	4-3/4"	
YAB344N	1	500 kcmil	-	1/2"	1.75"	3.00"	Straight	2.25	.25	6.33	U36RT	Green	22	2-1/2"
YAB444N	1	1000 kcmil	-	1/2"	1.75"	3.03"	Straight	3.00	.50	7.67	P44RT	White	27	3-1/16"
YAB464N	1	1500 kcmil	-	1/2"	1.75"	3.00"	Straight	3.19	.50	7.63	P46RT	Green	31	3-1/4"

Available undrilled. Add suffix "U" to catalog number (example YA444NU).

* Use PUADP-1 adaptor with "U" dies in Y46 HYPRESS™.

** "P" dies for use with Y46 HYPRESS™ only. PUADP-1 adaptor not required.

*** The MM² conductor sizes listed are for Class 2 conductor.

For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

† Requires Y60BHU HYPRESS™