

A14 DIP PLUG (.1" * .6")

PITCH 2.54mm

MATERIAL

INSULATOR - PBT (UL 94V-0)
CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

30 MILLIOHM MAX.

INSULATION RESISTANCE


1000 MEGOHM MIN.

DIELECTRIC VOLTAGE

500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

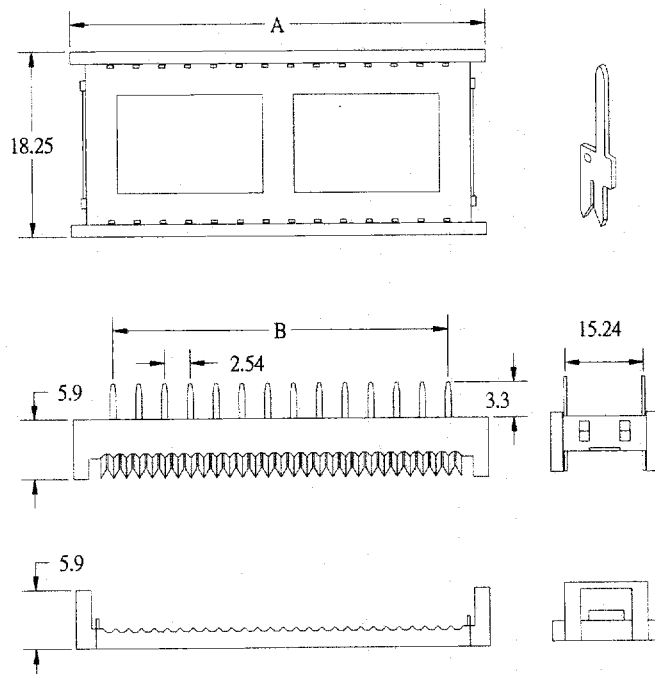

POSITION	A	B
24	35.76	27.94
28	40.84	33.02
32	45.92	38.10
36	51.00	43.18
40	56.08	48.26

1.NO. OF CONTACT

24 28 32 36 40

2.CONTACT MATERIAL

A: BRASS
B: PHOSPHOR BRONZE

3.CONTACT PLATING

T: TIN PLATED
S: SELECTIVE
G: GOLD FLASH
A: 5u" INCH GOLD
B: 10u" INCH GOLD
C: 15u" INCH GOLD
D: 30u" INCH GOLD

4.INSULATOR COLOR

1. BLACK
2. GREY

