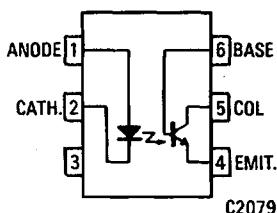
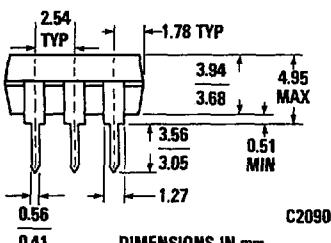
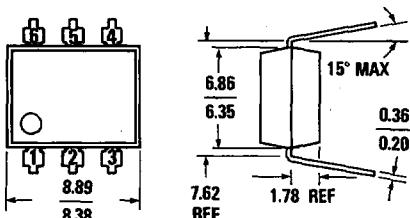



**CNY17-1/1Z CNY17-3/3Z
CNY17-2/2Z CNY17-4/4Z**
PACKAGE DIMENSIONS

Equivalent Circuit
DESCRIPTION

The CNY17 series consists of a Gallium Arsenide IRED coupled with an NPN phototransistor.

FEATURES

- High isolation voltage
5300 VAC RMS—5 seconds
7500 VAC PEAK—5 seconds
- High BV_{CEO} minimum 70 volts
- Current transfer ratio in selected groups:
CNY17-1: 40%- 80%
CNY17-2: 63%-125%
CNY17-3: 100%-200%
CNY17-4: 160%-320%
- Maximum switching time in saturation specified
- Underwriters Laboratory (UL) recognized File #E50151
- See VDE datasheet

APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs
- Appliance sensor systems
- Industrial controls

ABSOLUTE MAXIMUM RATINGS
TOTAL PACKAGE

Storage temperature	-55°C to 150°C
Operating temperature	-55°C to 100°C
Lead temperature (soldering, 10 sec)	260°C
Total package power dissipation @ 25°C (LED plus detector)	260 mW
Derate linearly from 25°C	3.5 mW/°C

INPUT DIODE

Forward DC current	90 mA
Reverse voltage	6 V
Peak forward current (1 μs pulse, 300 pps)	3.0 A
Power dissipation 25°C ambient	135 mW
Derate linearly from 25°C	1.8 mW/°C

OUTPUT TRANSISTOR

Power dissipation @ 25°C	200 mW
Derate linearly from 25°C	2.67 mW/°C

CNY17-1/1Z CNY17-2/2Z CNY17-3/3Z CNY17-4/4Z

ELECTRO-OPTICAL CHARACTERISTICS (25°C Temperature Unless Otherwise Specified)
INDIVIDUAL COMPONENT CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
INPUT DIODE						
Forward voltage	V_F		1.3	1.50	V	$I_F=60\text{ mA}$
Forward voltage temp. coefficient	$\frac{\Delta V_F}{\Delta T_A}$		-1.8		mV/°C	
Reverse voltage	V_R	6.0	15		V	$I_R=10\text{ }\mu\text{A}$
Junction capacitance	C_J		50		pF	$V_F=0\text{ V}, f=1\text{ MHz}$
			65		pF	$V_F=1\text{ V}, f=1\text{ MHz}$
Reverse leakage current	I_R		.35	10	μA	$V_R=3.0\text{ V}$
OUTPUT TRANSISTOR						
DC forward current gain	h_{FE}	100	500			$V_{CE}=5\text{ V}, I_c=100\text{ }\mu\text{A}$
Breakdown voltage						
Collector to emitter	BV_{CEO}	70			V	$I_C=1.0\text{ mA}, I_F=0$
Collector to base	BV_{CBO}	70			V	$I_C=10\text{ }\mu\text{A}, I_F=0$
Emitter to collector	BV_{ECO}	7			V	$I_E=100\mu\text{A}, I_F=0$
Leakage current						
Collector to emitter	I_{CEO}		5	50	nA	$V_{CE}=10\text{ V}, I_F=0$
Collector to base	I_{CBO}			20	nA	$V_{CB}=10\text{ V}, I_F=0$
Capacitance						
Collector to emitter			8		pF	$V_{CE}=0, f=1\text{ MHz}$
Collector to base			20		pF	$V_{CB}=5, f=1\text{ MHz}$
Emitter to base			10		pF	$V_{EB}=0, f=1\text{ MHz}$

TRANSFER CHARACTERISTICS

DC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Current Transfer Ratio, collector to emitter CNY17-1	CTR	40		80	%	$I_F=10\text{ mA}; V_{CE}=5\text{ V}$
CNY17-2		63		125		
CNY17-3		100		200		
CNY17-4		160		320		
Saturation voltage	$V_{CE(SAT)}$		0.27	.40	V	$I_F=10\text{ mA}; I_c=2.5\text{ mA}$

TRANSFER CHARACTERISTICS

AC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SWITCHING TIMES						
Non-saturated						
Turn-on time	t_{on}		6.0	10	μs	$R_L=100\text{ }\Omega; I_c=2\text{ mA}; V_{cc}=10\text{ V}$
Turn-off time	t_{off}		5.5	10	μs	See Fig. 10 and Fig. 11.

ELECTRO-OPTICAL CHARACTERISTICS

(25°C Temperature Unless Otherwise Specified) (Cont'd)

TRANSFER CHARACTERISTICS (Cont'd)



AC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SATURATED SWITCHING TIMES						
Turn-on time	t_{on}					
CNY17-1		3.0	5.5		μs	$I_F=20 \text{ mA}, V_{CE}=0.4 \text{ V}$
CNY17-2, CNY17-3		4.2	8.0		μs	$I_F=10 \text{ mA}, V_{CE}=0.4 \text{ V}$
Rise-time	t_r					
CNY17-1		2.0	4.0		μs	$I_F=20 \text{ mA}, V_{CE}=0.4 \text{ V}$
CNY17-2, CNY17-3		3.0	6.0		μs	$I_F=10 \text{ mA}, V_{CE}=0.4 \text{ V}$
Turn-off time	t_{off}					
CNY17-1		18	34		μs	$I_F=20 \text{ mA}, V_{CE}=0.4 \text{ V}$
CNY17-2, CNY17-3		23	39		μs	$I_F=10 \text{ mA}, V_{CE}=0.4 \text{ V}$
Fall-time	t_f					
CNY17-1		11	20		μs	$I_F=20 \text{ mA}, V_{CE}=0.4 \text{ V}$
CNY17-2, CNY17-3		14	24		μs	$I_F=10 \text{ mA}, V_{CE}=0.4 \text{ V}$

ISOLATION CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Isolation Voltage	V_{iso}	5300			V_{AC} RMS	Relative humidity < 50%, $I_{IO} < 10 \mu A$, 5 seconds
	V_{iso}	7500			V_{AC} PEAK	Relative humidity < 50%, $I_{IO} < 10 \mu A$, 5 seconds
Isolation resistance	R_{iso}	10^{11}			ohms	$V_{IO}=500 \text{ VDC}$
Isolation capacitance	C_{iso}	0.5			pF	$f=1 \text{ MHz}$







ELECTRICAL CHARACTERISTIC CURVES

(25°C Free Air Temperature Unless Otherwise Specified)

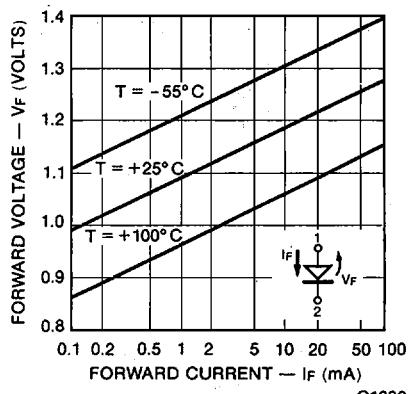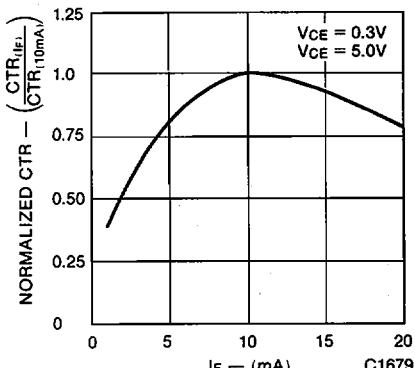Fig. 1. Forward Voltage vs.
CurrentFig. 2. Normalized CTR vs.
Forward Current
CNY17-1/1Z CNY17-2/2Z CNY17-3/3Z CNY17-4/4Z

ELECTRICAL CHARACTERISTIC CURVES

(25°C Free Air Temperature Unless Otherwise Specified) (Cont'd)

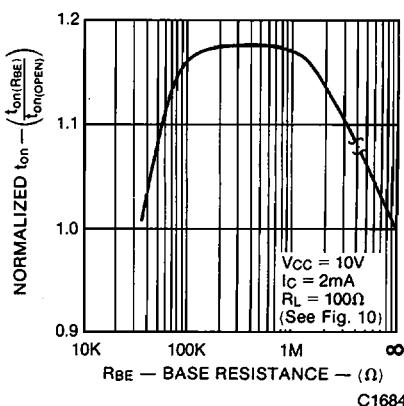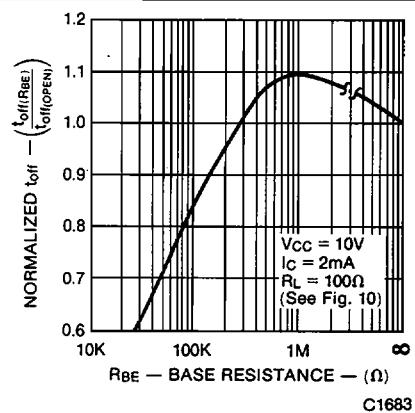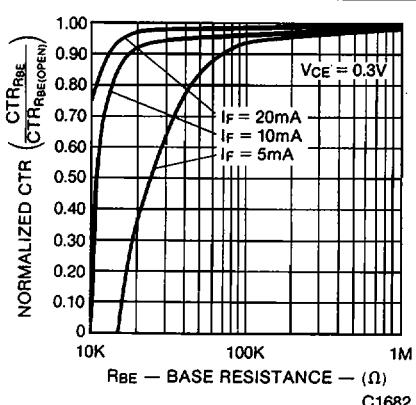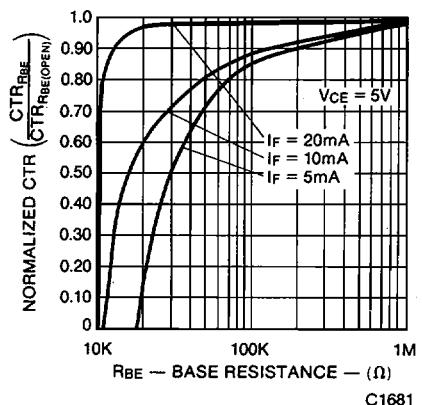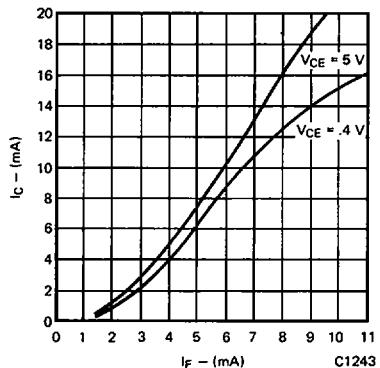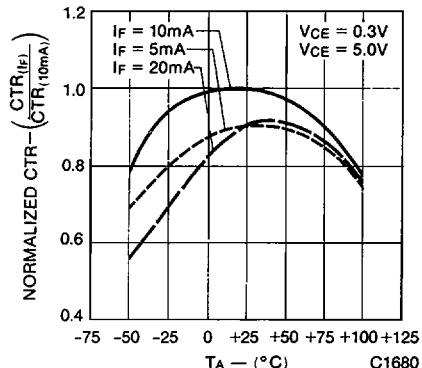

ELECTRICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature Unless Otherwise Specified) (Cont'd)

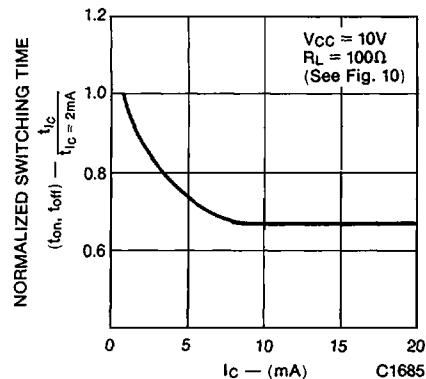


Fig. 9. Switching Time vs. IC

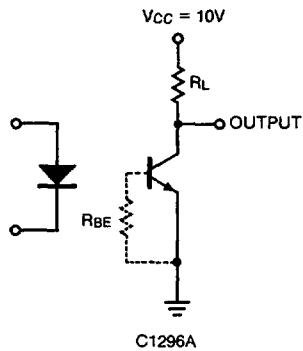


Fig. 10. Switching Time Test Circuit

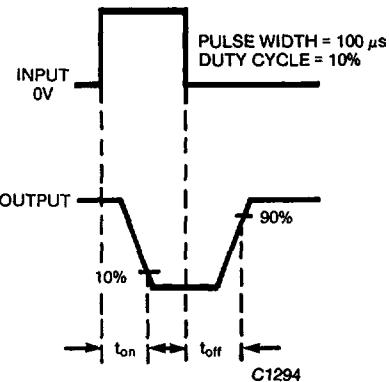


Fig. 11. Switching Time Waveforms

CNY17-1/1Z CNY17-2/2Z CNY17-3/3Z CNY17-4/4Z

