


NPN SILICON EPITAXIAL TRANSISTOR
POWER MINI MOLD

DESCRIPTION

The 2SC2780 is designed for audio frequency preamplifier application, especially in Hybrid Integrated Circuits.

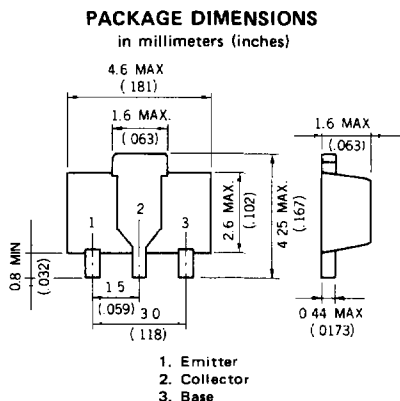

FEATURES

- World Standard Miniature Package
: SOT-89
- High Collector to Emitter Voltage
: $V_{CE0} > 140$ V
- Complements to PNP type 2SA1173

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Maximum Voltages and Currents

Collector to Base Voltage	V_{CBO}	140	V
Collector to Emitter Voltage	V_{CEO}	140	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current (DC)	I_C	50	mA
Collector Current (Pulse)*	I_C	100	mA

Maximum Power Dissipation

Total Power Dissipation at 25°C Ambient Temperature**	P_T	2.0	W
--	-------	-----	---

Maximum Temperatures

Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

*PW ≤ 10 ms, duty cycle ≤ 50 %

**When mounted on ceramic substrate of $2.5\text{ cm}^2 \times 0.7\text{ mm}$

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			100	nA	$V_{CB} = 140\text{ V}, I_E = 0$
Emitter Cutoff Current	I_{EBO}			100	nA	$V_{EB} = 5.0\text{ V}, I_C = 0$
DC Current Gain	h_{FE1}	50	180			$V_{CE} = 10\text{ V}, I_C = 1.0\text{ mA}$ ***
DC Current Gain	h_{FE2}	90	200	400		$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}$ ***
Collector Saturation Voltage	$V_{CE(sat)}$		0.07	0.60	V	$I_C = 20\text{ mA}, I_B = 2.0\text{ mA}$ ***
Base Saturation Voltage	$V_{BE(sat)}$		0.75	1.0	V	$I_C = 20\text{ mA}, I_B = 2.0\text{ mA}$ ***
Base to Emitter Voltage	V_{BE}	650	685	750	mV	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}$ ***
Gain Bandwidth Product	f_T		120		MHz	$V_{CE} = 10\text{ V}, I_E = -10\text{ mA}$
Output Capacitance	C_{ob}		2.3		pF	$V_{CB} = 10\text{ V}, I_E = 0, f = 1.0\text{ MHz}$

***Pulsed: PW $\leq 350\text{ }\mu\text{s}$, duty cycle ≤ 2 %

h_{FE} Classification

MARKING	NM	NL	NK
h_{FE2}	90 - 180	135 - 270	200 - 400

TYPICAL CHARACTERISTICS (Ta=25 °C)

