

# MUR1610CT, MUR1615CT, MUR1620CT, MUR1640CT, MUR1660CT



**KERSEMI**

<http://www.kersemi.com>

## Power Rectifiers

... designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:



- Ultrafast 35 and 60 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL94, V<sub>O</sub> @ 1/8"
- High Temperature Glass Passivated Junction
- High Voltage Capability to 600 Volts
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures

### Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1610, U1615, U1620, U1640, U1660


### MAXIMUM RATINGS

**ULTRAFAST  
RECTIFIERS  
8.0 AMPERES  
100-600 VOLTS**



**TO-220AB  
CASE 221A  
PLASTIC**

### MARKING DIAGRAM



U16xx = Device Code  
xx = 10, 15, 20, 40 or 60

### ORDERING INFORMATION

Device	Package	Shipping
MUR1610CT	TO-220	50 Units/Rail
MUR1615CT	TO-220	50 Units/Rail
MUR1620CT	TO-220	50 Units/Rail
MUR1640CT	TO-220	50 Units/Rail
MUR1660CT	TO-220	50 Units/Rail

# MUR1610CT, MUR1615CT, MUR1620CT, MUR1640CT, MUR1660CT

## MAXIMUM RATINGS

Rating	Symbol	MUR16					Unit
		10CT	15CT	20CT	40CT	60CT	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	100	150	200	400	600	Volts
Average Rectified Forward Current Total Device, (Rated $V_R$ ), $T_C = 150^\circ\text{C}$	Per Leg Total Device $I_{F(AV)}$	8.0 16					Amps
Peak Rectified Forward Current (Rated $V_R$ , Square Wave, 20 kHz), $T_C = 150^\circ\text{C}$	Per Diode Leg $I_{FM}$	16					Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	$I_{FSM}$	100					Amps
Operating Junction Temperature and Storage Temperature	$T_J, T_{stg}$	- 65 to +175					$^\circ\text{C}$

## THERMAL CHARACTERISTICS (Per Diode Leg)

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	2.0	$^\circ\text{C/W}$
--	-----------------	-----	-----	--------------------

## ELECTRICAL CHARACTERISTICS (Per Diode Leg)

Maximum Instantaneous Forward Voltage (Note 1.) ( $i_F = 8.0$ Amps, $T_C = 150^\circ\text{C}$ ) ( $i_F = 8.0$ Amps, $T_C = 25^\circ\text{C}$ )	$V_F$	0.895 0.975	1.00 1.30	1.20 1.50	Volts
Maximum Instantaneous Reverse Current (Note 1.) (Rated dc Voltage, $T_C = 150^\circ\text{C}$ ) (Rated dc Voltage, $T_C = 25^\circ\text{C}$ )	$i_R$	250 5.0	500 10		$\mu\text{A}$
Maximum Reverse Recovery Time ( $I_F = 1.0$ Amp, $di/dt = 50$ Amps/ $\mu\text{s}$ ) ( $I_F = 0.5$ Amp, $I_R = 1.0$ Amp, $I_{REC} = 0.25$ Amp)	$t_{rr}$	35 25	60 50		ns

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$

# MUR1610CT, MUR1615CT, MUR1620CT, MUR1640CT, MUR1660CT

## MUR1610CT, MUR1615CT, MUR1620CT

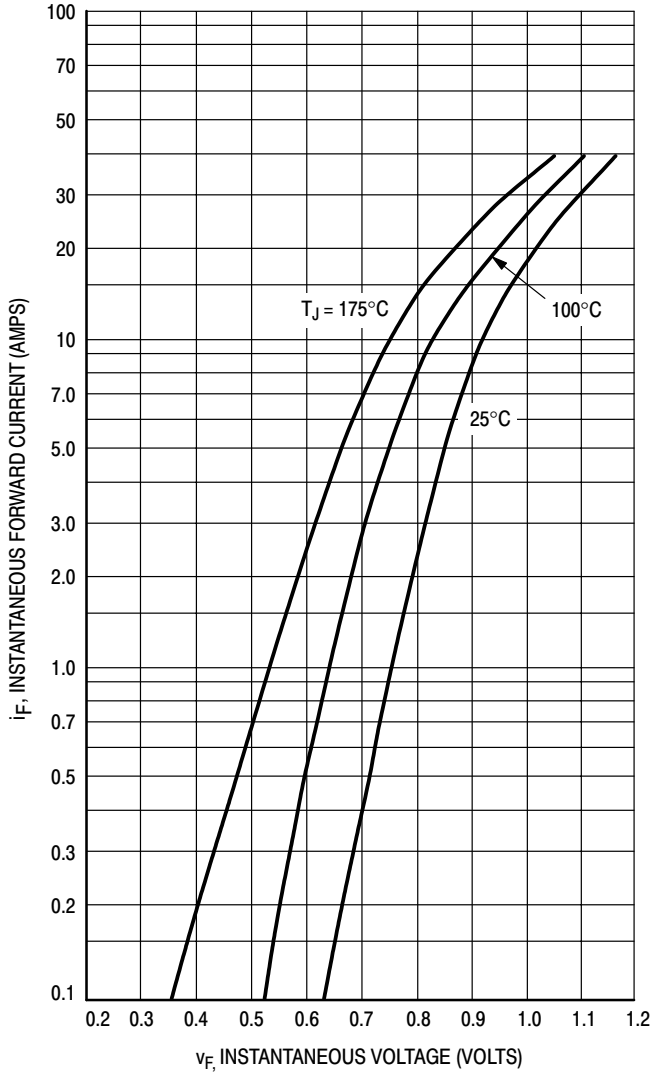


Figure 1. Typical Forward Voltage, Per Leg

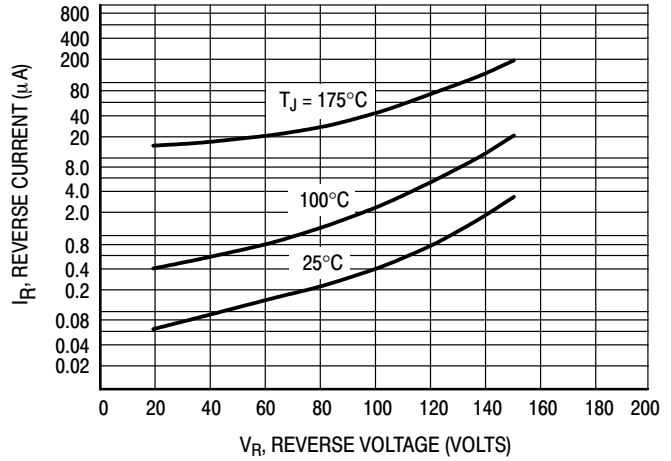


Figure 2. Typical Reverse Current, Per Leg\*

\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

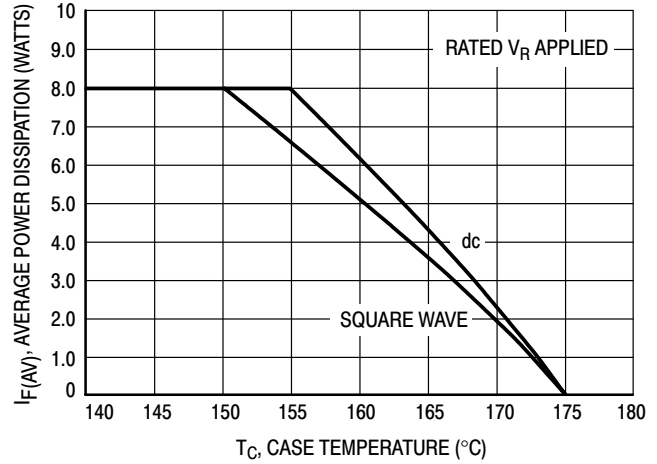


Figure 3. Current Derating, Case, Per Leg

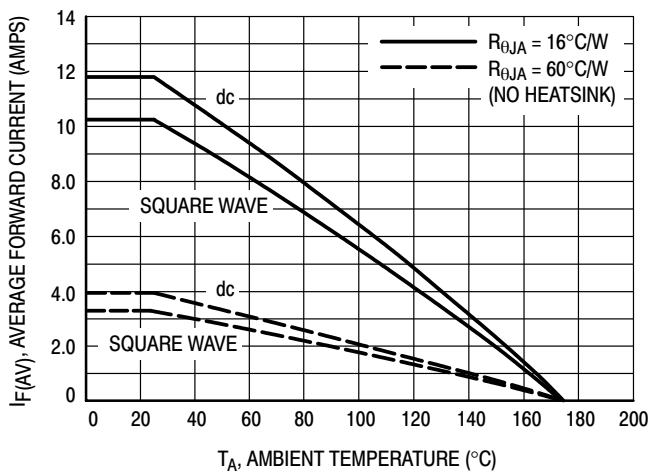


Figure 4. Current Derating, Ambient, Per Leg

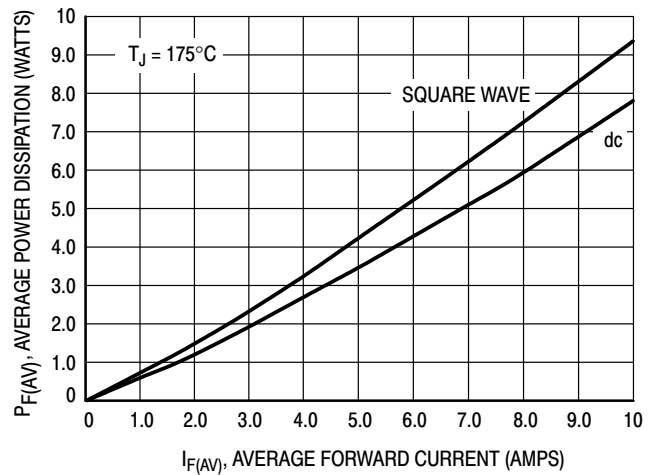


Figure 5. Power Dissipation, Per Leg

MUR1640CT

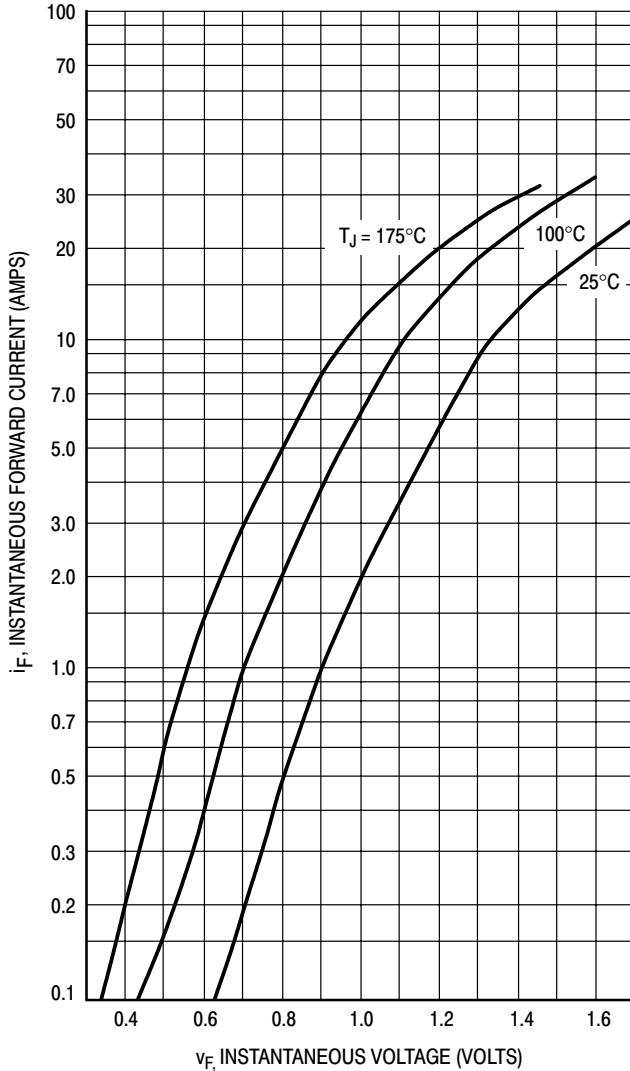


Figure 6. Typical Forward Voltage, Per Leg

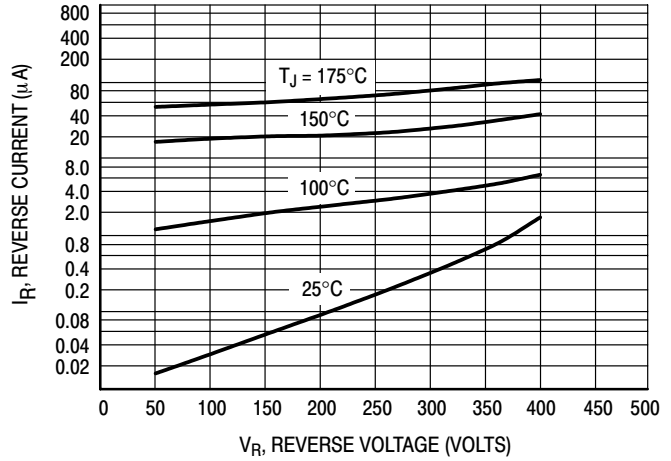


Figure 7. Typical Reverse Current, Per Leg\*

\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if  $V_R$  is sufficiently below rated  $V_R$ .

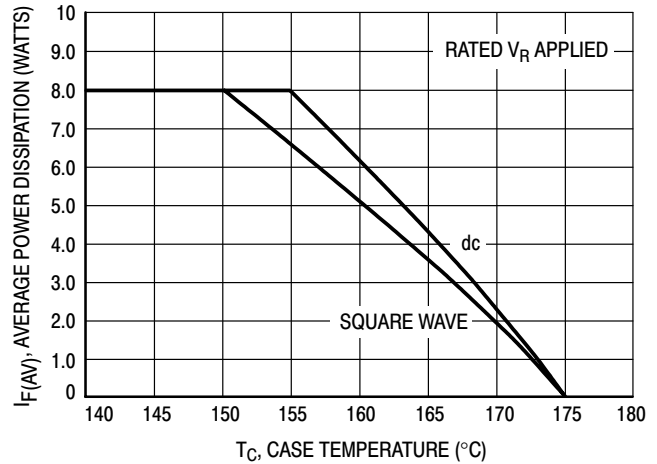


Figure 8. Current Derating, Case, Per Leg

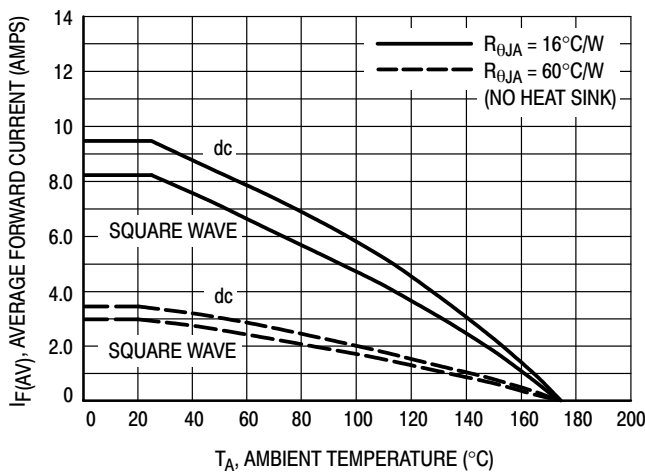


Figure 9. Current Derating, Ambient, Per Leg

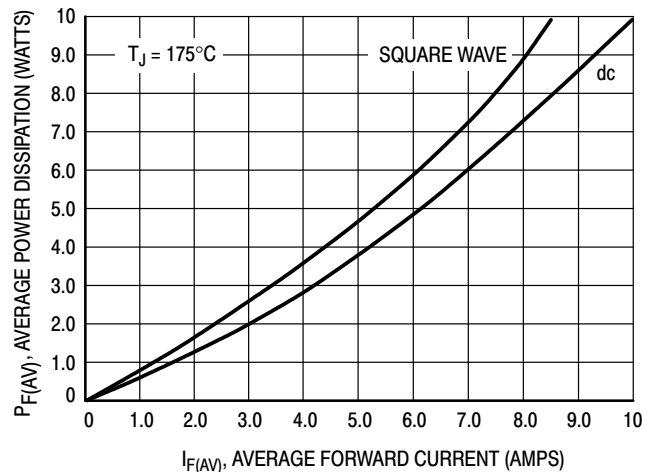


Figure 10. Power Dissipation, Per Leg

MUR1660CT

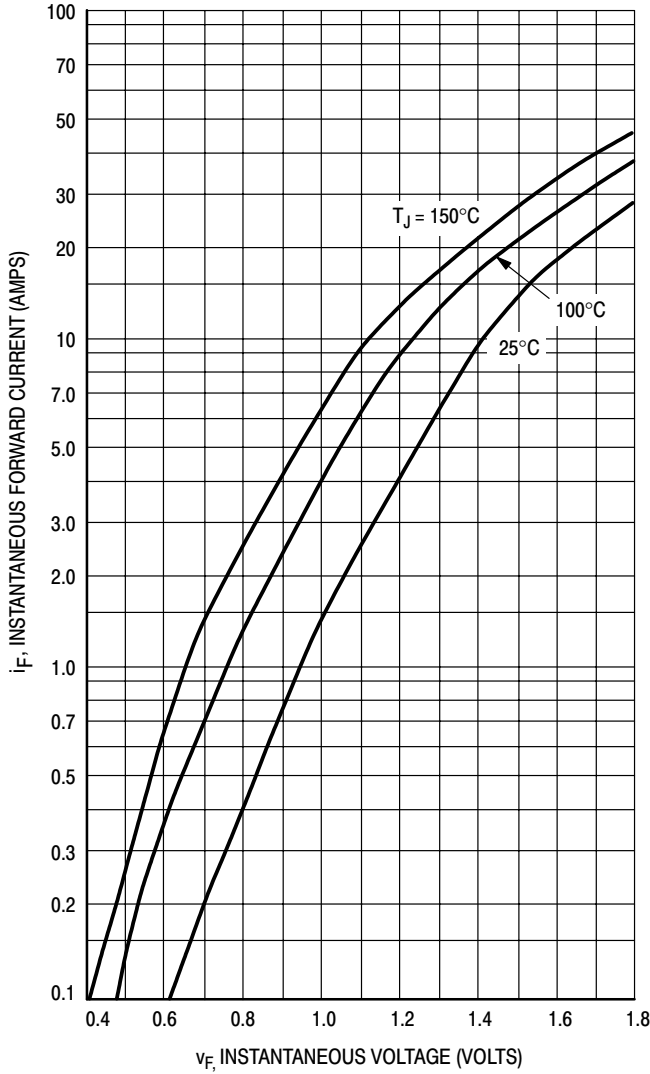


Figure 11. Typical Forward Voltage, Per Leg

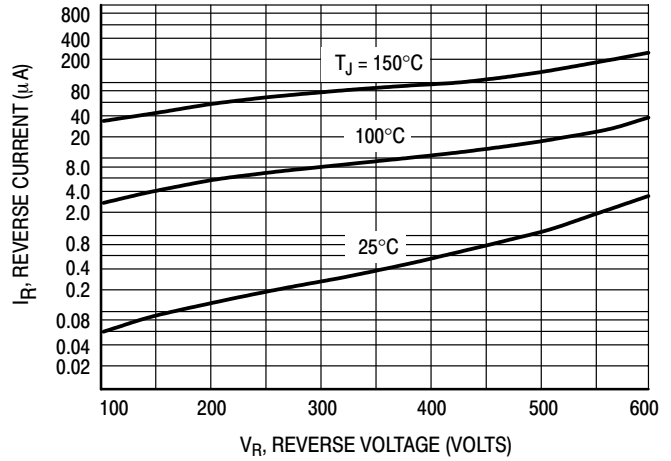


Figure 12. Typical Reverse Current, Per Leg\*

\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

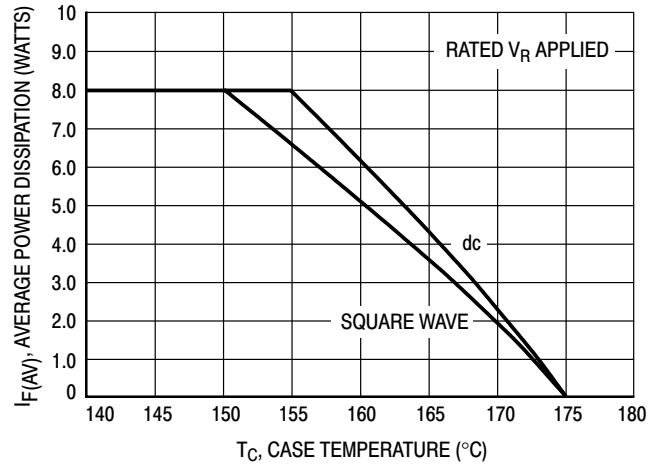


Figure 13. Current Derating, Case, Per Leg

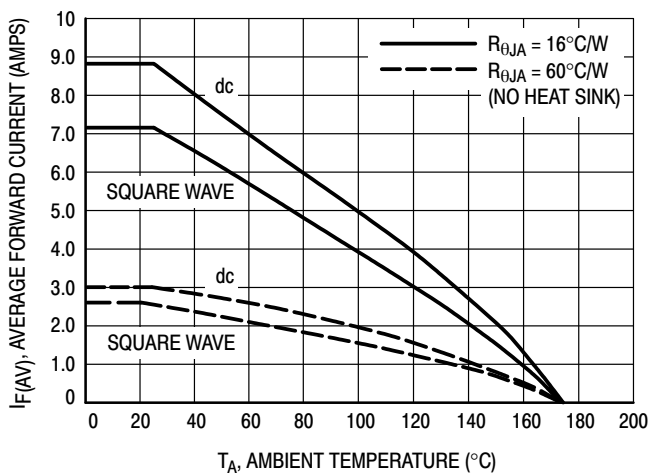


Figure 14. Current Derating, Ambient, Per Leg

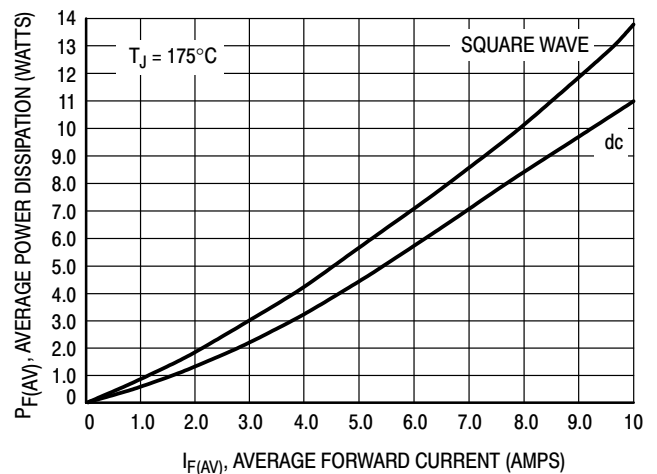


Figure 15. Power Dissipation, Per Leg

MUR1610CT, MUR1615CT, MUR1620CT, MUR1640CT, MUR1660CT

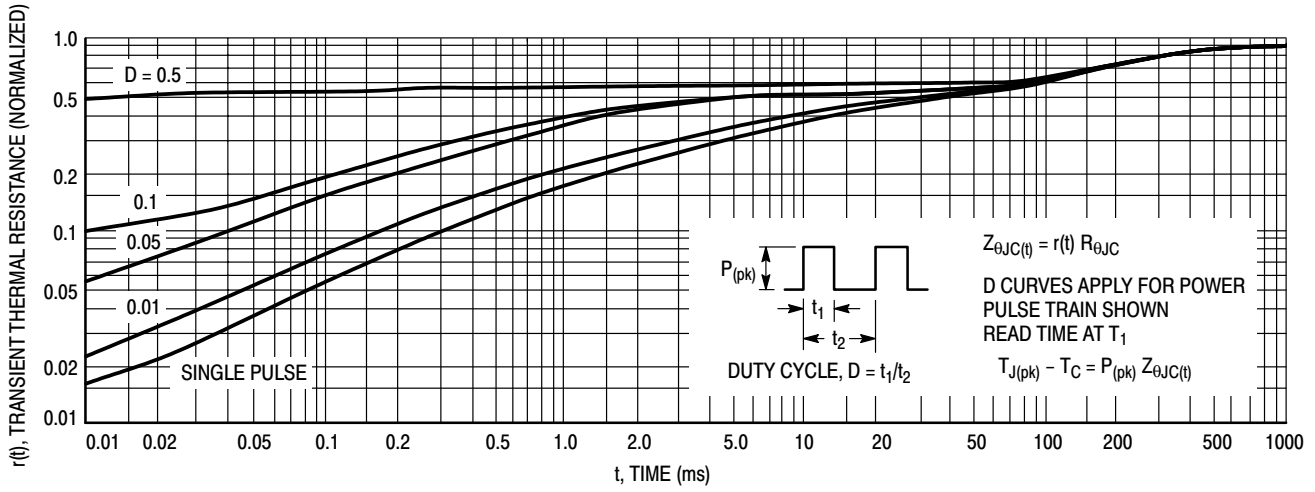


Figure 16. Thermal Response


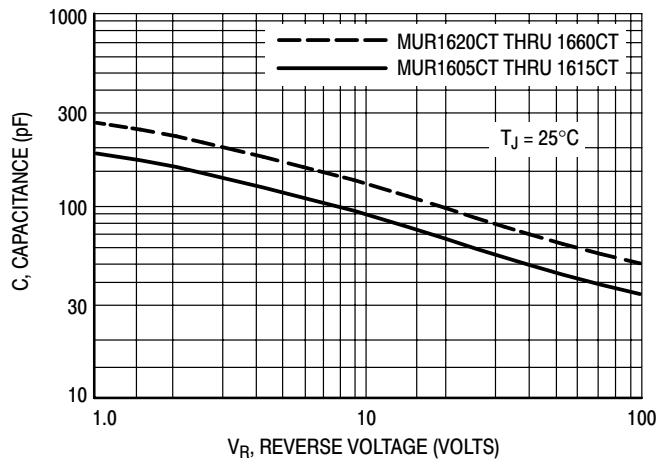


Figure 17. Typical Capacitance, Per Leg

# MUR1610CT, MUR1615CT, MUR1620CT, MUR1640CT, MUR1660CT

## PACKAGE DIMENSIONS

### TO-220 THREE-LEAD TO-220AB CASE 221A-09 ISSUE AA

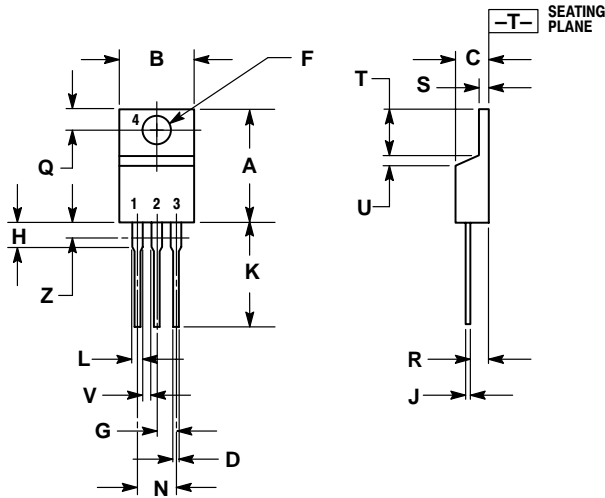

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04