

ELM6472-10F


C-Band Internally Matched FET

FEATURES

- High Output Power: P_{1dB}=40.5dBm(Typ.)
- High Gain: G_{1dB}=9.5dB(Typ.)
- High PAE: η_{add} =36%(Typ.)
- Broad Band: 6.4~7.2GHz
- Impedance Matched Z_{in}/Z_{out} = 50 Ω
- Hermetically Sealed Package

DESCRIPTION

The ELM6472-10F is a power GaAs FET that is internally matched for standard communication bands to provide optimum power and gain in a 50 Ω system.

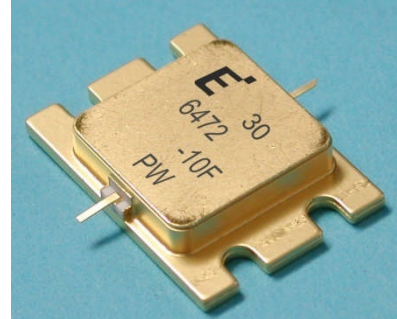

ABSOLUTE MAXIMUM RATINGS (Case Temperature T_c=25°C)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V _{DS}	15	V
Gate-Source Voltage	V _{GS}	-5	V
Total Power Dissipation	P _T	42.8	W
Storage Temperature	T _{stg}	-55 to +125	°C
Channel Temperature	T _{ch}	175	°C

RECOMMENDED OPERATING CONDITION (Case Temperature T_c=25°C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V _{DS}		≤10	V
Forward Gate Current	I _{GF}	R _G =50 ohm	≤27.0	mA
Reverse Gate Current	I _{GR}	R _G =50 ohm	≥-5.8	mA

ELECTRICAL CHARACTERISTICS (Case Temperature T_c=25°C)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Drain Current	I _{DSS}	V _{DS} =5V, V _{GS} =0V	-	4.0	5.6	A
Trans conductance	g _m	V _{DS} =5V, I _{DS} =2.4A	-	4.0	-	S
Pinch-off Voltage	V _p	V _{DS} =5V, I _{DS} =240mA	-0.5	-1.5	-3.0	V
Gate-Source Breakdown Voltage	V _{GSO}	I _{GS} =-240uA	-5.0	-	-	V
Output Power at 1dB G.C.P.	P _{1dB}	V _{DS} =10V f= 6.4 ~ 7.2 GHz I _{DS} DC=2.6A (typ.) Z _S =Z _L =50 ohm	39.5	40.5	-	dBm
Power Gain at 1dB G.C.P.	G _{1dB}		8.5	9.5	-	dB
Drain Current	I _{DSr}		-	2.6	3.0	A
Power-added Efficiency	η_{add}		-	36	-	%
Gain Flatness	ΔG		-	-	1.2	dB
3rd Order Intermodulation Distortion	IM ₃	f=7.2 GHz Δf =10MHz, 2-tone Test P _{out} =29dBm (S.C.L.)	-44	-46	-	dBc
Thermal Resistance	R _{th}	Channel to Case	-	3.0	3.5	°C/W
Channel Temperature Rise	ΔT_{ch}	10V x I _{DSr} X R _{th}	-	-	100	°C

CASE STYLE : IK

S.C.L. : Single Carrier Level

G.C.P.: Gain Compression Point


ESD	Class IIIA	4000 ~ 8000V
-----	------------	--------------

Note : Based on JEDEC JESD22-A114 (C=100pF, R=1500 Ω)


ELM6472-10F

C-Band Internally Matched FET


Power Derating Curve

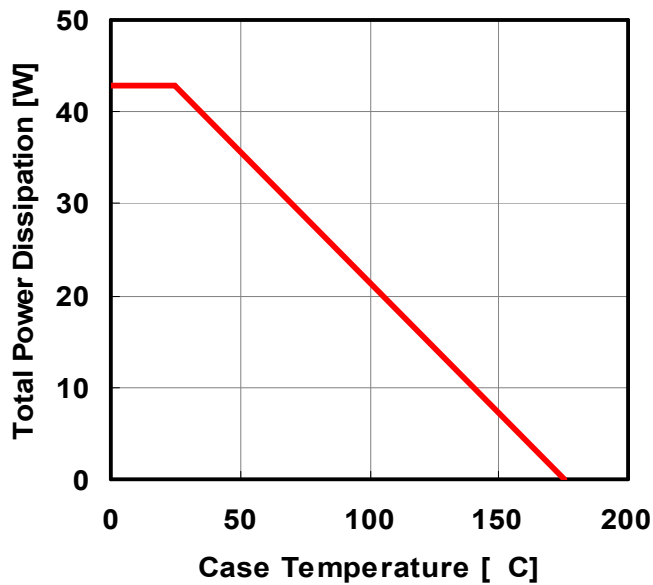


Input Power vs. Output Power & P.A.E
VDS=10V, IDS(DC)=2.6A

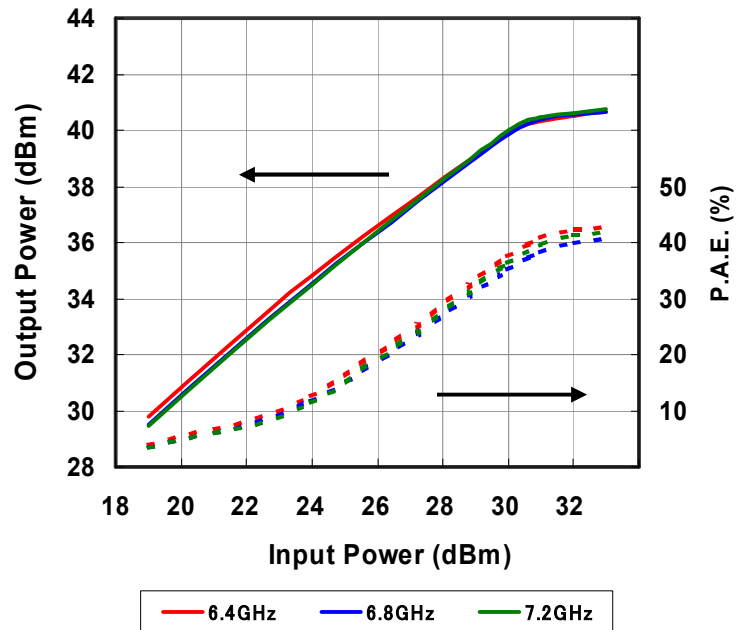

frequency vs. Output Power
VDS=10V, IDS(DC)=2.6A

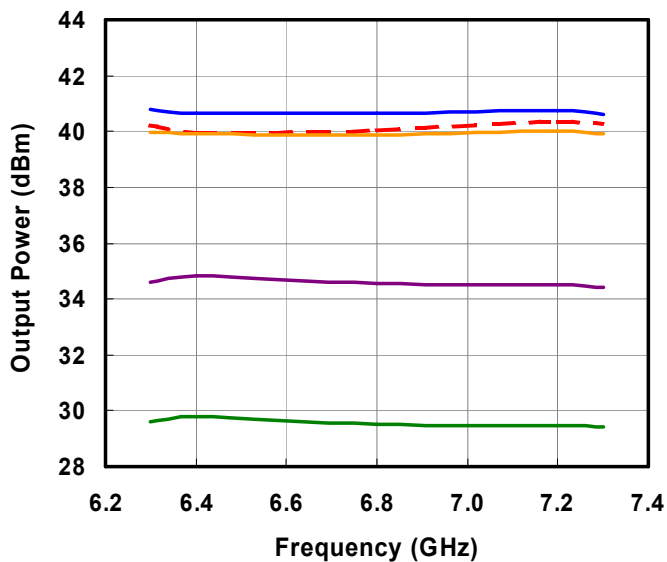

Output Power vs. IMD
VDS=10V, IDS(DC)=2.6A, Δf=10MHz


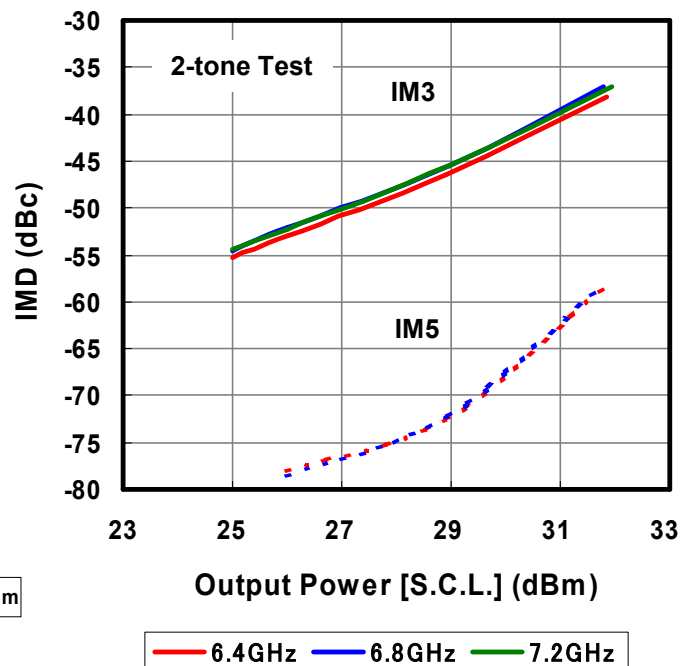


Eudyna

ELM6472-10F

C-Band Internally Matched FET

S-PARAMETER

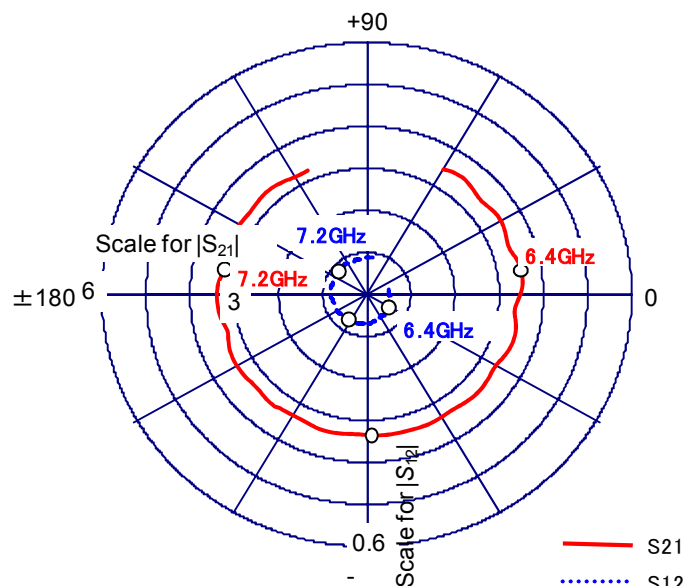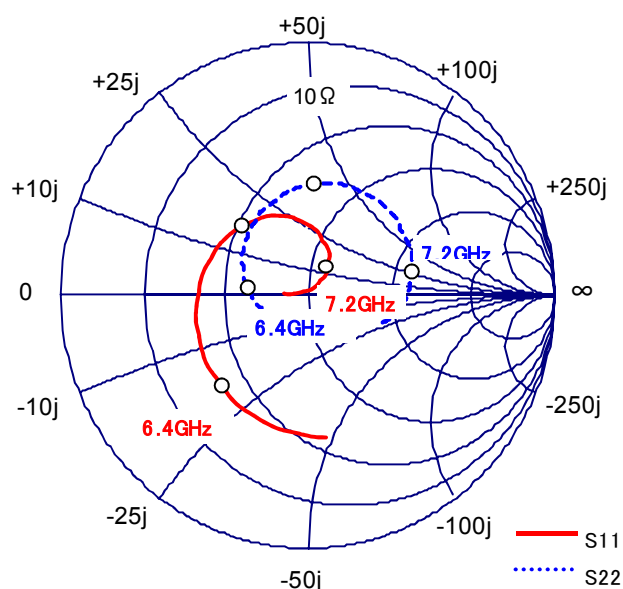


VDS=10.0V , IDS=2.6A

Freq [GHz]	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
6.2	0.566	-82.6	3.424	60.0	0.048	16.0	0.128	-103.6
6.3	0.531	-108.2	3.470	34.0	0.054	-7.2	0.170	-156.7
6.4	0.494	-135.1	3.533	7.7	0.057	-32.8	0.245	170.3
6.5	0.466	-159.6	3.476	-16.3	0.061	-57.1	0.313	145.0
6.6	0.437	176.9	3.420	-40.6	0.066	-78.3	0.366	123.9
6.7	0.414	154.1	3.395	-64.8	0.071	-100.6	0.414	104.3
6.8	0.378	131.7	3.364	-89.6	0.074	-126.6	0.444	85.1
6.9	0.339	110.0	3.364	-114.4	0.079	-148.3	0.469	66.7
7.0	0.279	88.7	3.369	-140.1	0.081	-173.4	0.475	48.0
7.1	0.215	70.0	3.304	-165.4	0.084	160.8	0.464	30.5
7.2	0.135	54.3	3.292	168.3	0.086	137.2	0.432	12.0
7.3	0.036	55.9	3.307	141.9	0.086	111.8	0.381	-6.0
7.4	0.096	173.9	3.241	114.8	0.090	82.9	0.312	-22.1

ELM6472-10F

C-Band Internally Matched FET

■ Package Out Line
Case Style : IK

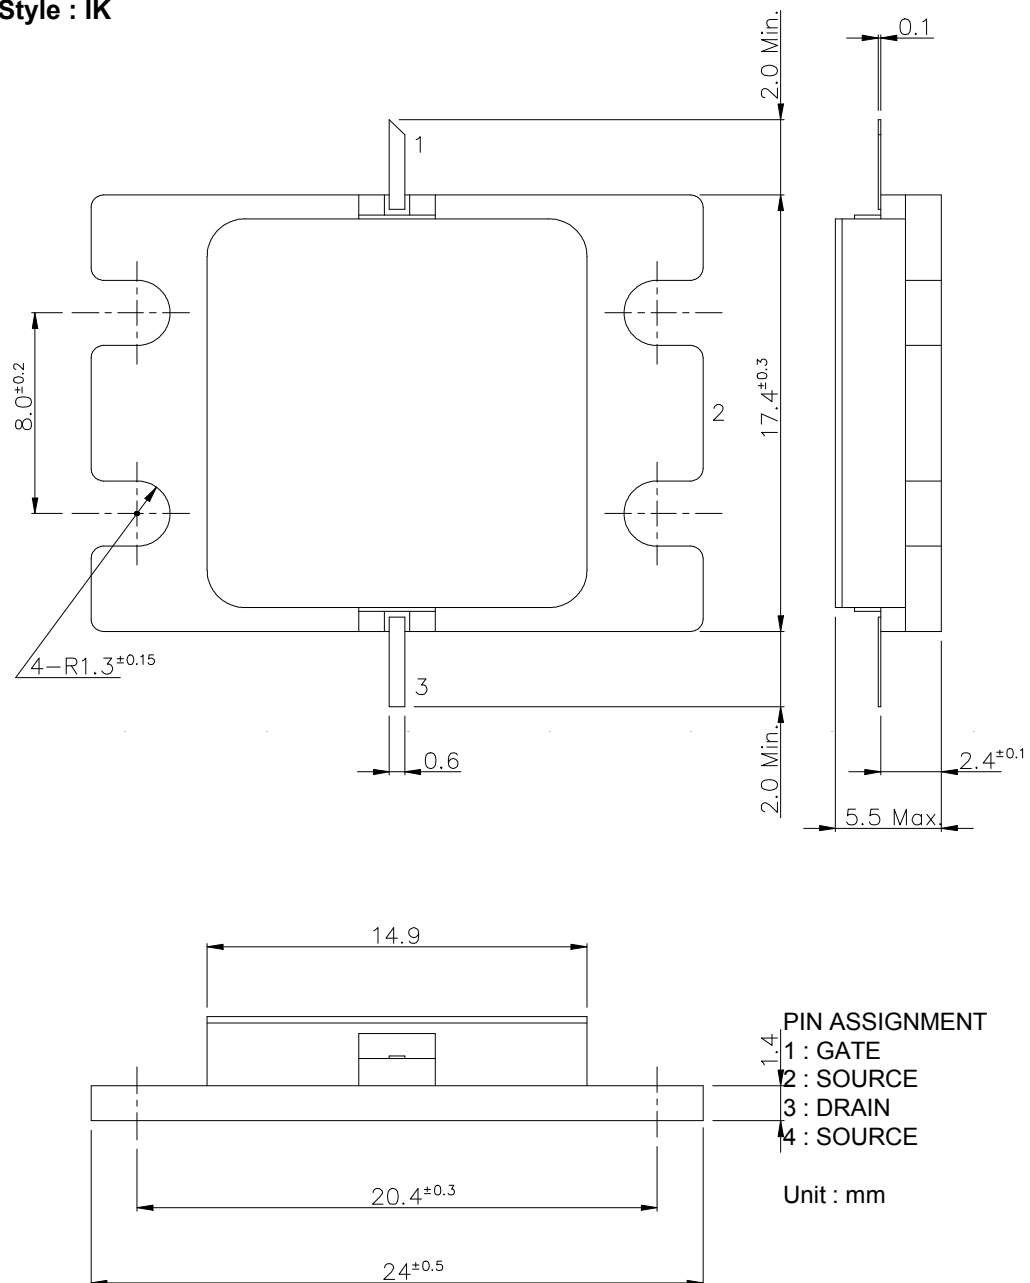

ELM6472-10F

C-Band Internally Matched FET

For further information please contact :

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
Phone: (408) 232-9500
FAX: (408) 428-9111
www.fcsi.fujitsu.com

Eudyna Devices Europe Ltd.

150 Edinburgh Avenue,
Slough, Berkshire, SL1 4SS,
United Kingdom
Phone: +44 (0) 1753-849950
FAX: +44 (0) 1753-577128

Eudyna Devices Asia Pte. Ltd. Hong Kong Branch

Rm.1906B, 19/F, Tower 6, China Hong Kong City,
33 Canton Road,
Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: (852) 2377-0227
Fax: (852) 2377-3921

Eudyna Devices International s.r.l

Via Toglio 8/2-20158 Milano Italy
TEL:+39-02-37052921
Fax :+39-02-37052920

Eudyna Devices Inc.

Yokohama (HQ)

1,Kanai-cho,Sakae-ku,Yokohama,
Kanagawa, 244-0845,Japan
Tel +81-45-853-8156
Fax +81-45-853-8170

Eudyna Devices Inc.

Yamanashi Plant

1000 Kamisukiawara, Showa-cho, Nakakoma-gun,
Yamanashi, 409-3883, Japan
(Kokubo Industrial Park)
Tel +81-55-275-4411
Fax +81-55-275-9461

CAUTION

Eudyna Devices Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment.

For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna