

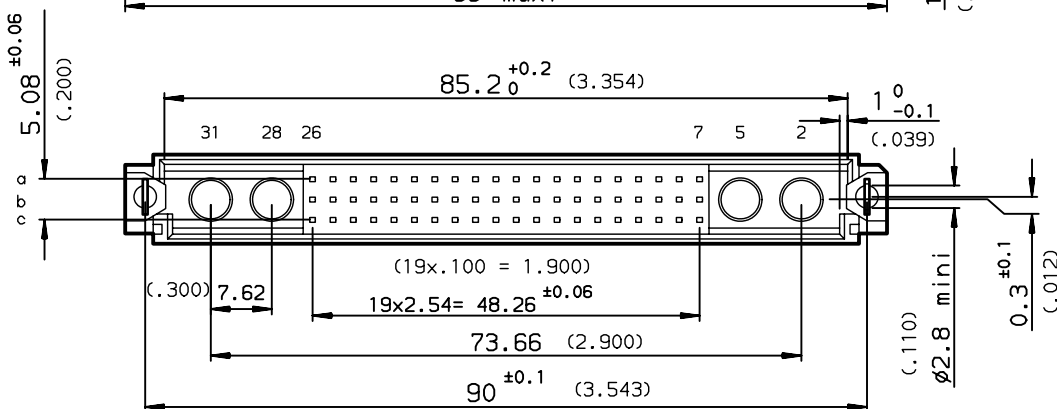


DIMENSIONS mm (inches)

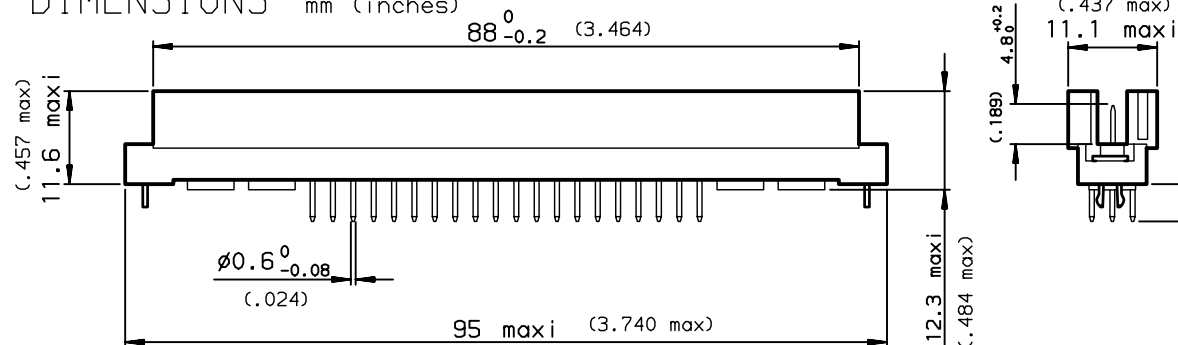

PCB DRILLING

component side

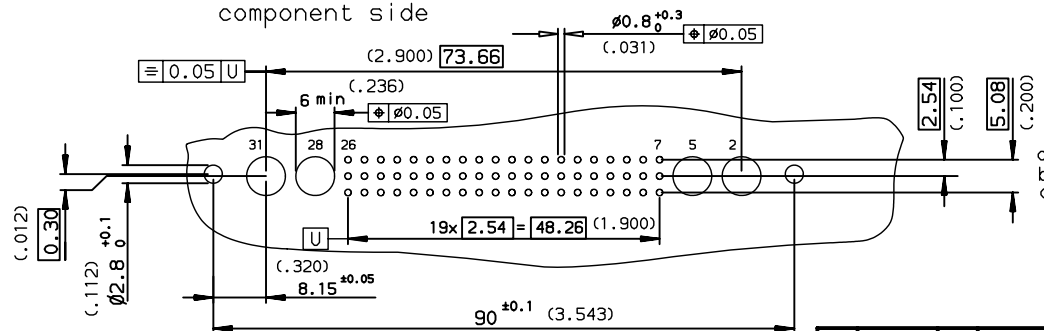

PART NUMBER		8609		C8		5	
PIN OUT		rows a-b-c		3 - 60		4 - 40	
NUMBER OF CONTACTS							
TERMINATION		L = 2.70 ±0.25 (.106)		- 24			
		L = 4.65 ±0.25 (.183)		- 14			
OPTIONS		no option		7 H A R			
		with harpoons		- for PCB thickness 1.6 mm			
				- for PCB thickness 2.4 mm			
				- for PCB thickness 3.2 mm			
PERFORMANCE CLASS		DIN 41612 class 3		4			
		DIN 41612 class 2		5			
		DIN 41612 class 1		6			
TERMINATION TYPE		TIN LEAD		000E1			
		LEAD FREE		E1LF			

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1996/02/22	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1996/02/22	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1996/02/22	0.XX' ±2'	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1996/02/22	Product family		DIN 8609	Spec ref -	
FCI		title		STRAIGHT MALE WITH SPECIAL CONTACTS		Rev.	
				SOLDER TO BOARD		C	
		catalog no		-		CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/01
C	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-