

Data Sheet

DC204-135

December, 2005

1x4 Dual Window Wideband Coupler

DC204-135



Features

- Operating three window (1310, 1490, and 1550nm communication window)
- Suitable for constructing Passive Optical Networks.
- High reliability. (Telcordia GR-1209, GR-1221 Qualified)

Specification


Parameter	Specification
Configuration	1 x 4
Fiber type	0.25mm coating SM-fiber (ITU-T G.652)
Operating Wavelength	1260 ~ 1360 nm and 1480 ~ 1580 nm
Operating Temperature	-30 ~ +75 °C
Storage Temperature	-40 ~ +85 °C
Insertion Loss (dB)	Max. ^{*1)} ≤ 7.5 (Typ. 6.2dB)
Uniformity (dB)	Max. ^{*2)} ≤ 1.6 (Typ. 1.1dB)
Polarization Dependent Loss (dB p-p)	≤ 0.3
Directivity (dB)	≥ 50
Return Loss (dB)	≥ 50
Size	φ2.9 x L 42(mm)

All specification not include connectors.


*1) Include wavelength dependent loss, polarization dependent loss and temperature dependent loss.

*2) Loss variation over 4 ports. Maximum variation over operating wavelength.

Mechanical Dimension

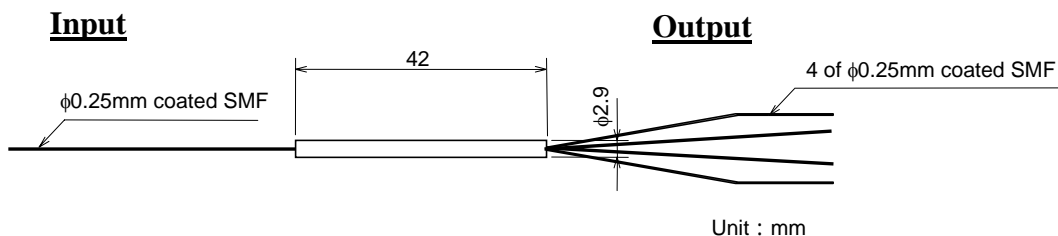

Ordering Information

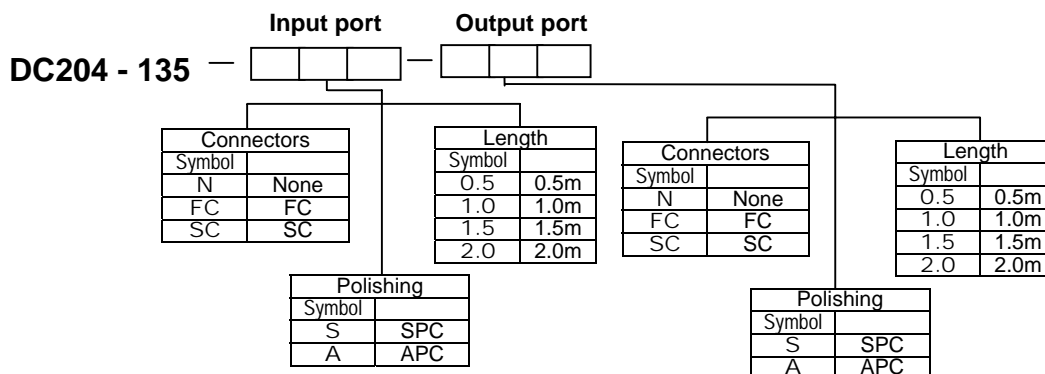

Furukawa Electric reserves the right to improve, enhance and modify the features and specifications of FITEL products without prior notifications.



THE FURUKAWA ELECTRIC CO., LTD.

Japan
Head Office

2-2-3, Marunouchi
Chiyoda-ku
Tokyo 100-8322, JAPAN
Tel: +81-3-3286-3133
Fax: +81-3-3286-3708
<http://www.furukawa.co.jp>
Email: comsales@ho.furukawa.co.jp

North America
Furukawa America Inc.

200 Westpark Drive, Suite 190
Peachtree City, GA 30269
Tel: 770-487-1234
Toll-Free: 1-866-GO-FITEL(463-4835)
Fax: 770-487-9910
<http://www.furukawaamerica.com>
oesales@FurukawaAmerica.com

Europe
Furukawa Electric Europe Ltd.

3rd Floor, Newcombe House
43-45 Notting Hill Gate
London W11 3FE, UK
Tel: +44-20-7221-6000
Fax: +44-20-7313-5310
<http://www.furukawa-fitel.co.uk>
E-mail: sales@furukawa-fitel.co.uk